

Lamp block

704.950.2/D

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.950.2/D>

Your product:



704.950.2/D Lamp block

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1/DIN EN 60947-5-1

MECHANICAL CHARACTERISTIC

Switching positions: 2 positions

Weight: 0.013 kg

Terminal: Double plug-in terminal, 6.3 x 0.8 mm

Wire cross section: Double plug-in terminal 2 x 6.3 mm x 0.8 mm

AMBIENT CONDITION

Storage temperature: - 40 °C ... + 85 °C

IP Protection: IP00

Operating temperature: - 40 °C ... + 55 °C

Vibration resistance: Max. 100 m / s² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

Climate resistance: Relative humidity, max. 95%, non-condensing

Shock resistance: Max. 300 m/s², pulse width 11 ms (sinusoidal EN IEC 60068-2-27)


OTHER

Short Description: Lamp block, Plastic, Double plug-in terminal, 6.3 x 0.8 mm


Hints: When using the lamp block, the application guidelines must be observed.

Housing material: Plastic

Wiring diagrams:

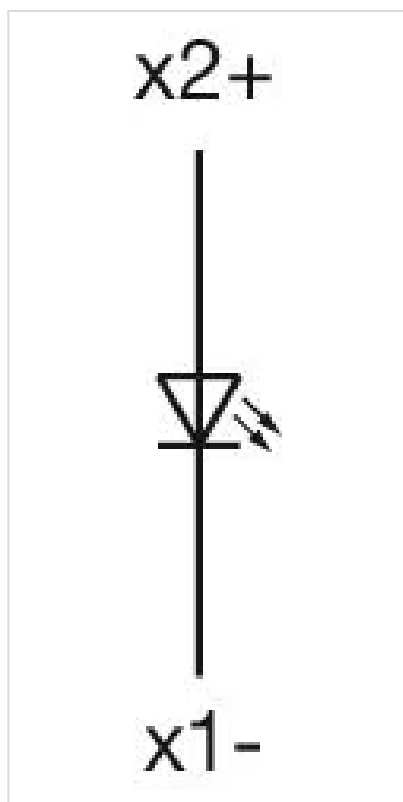

Dimension drawings:

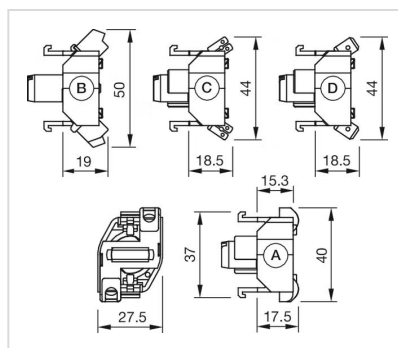

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm