




Terminals & Splices > Quick Disconnects

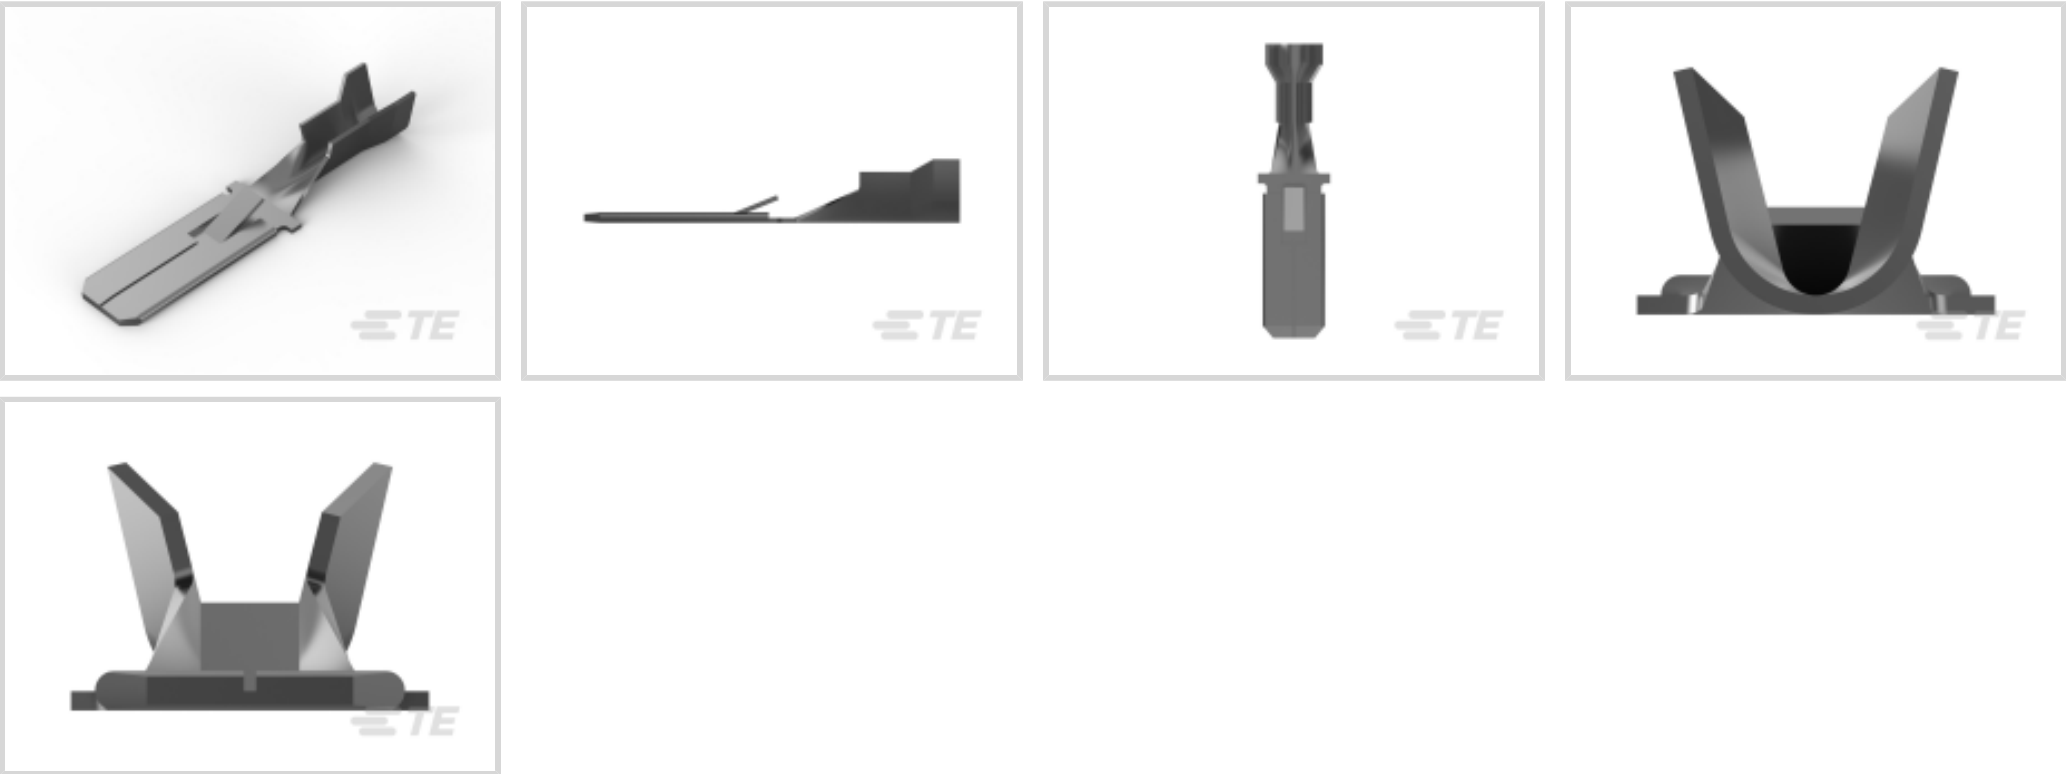

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

	.055 in
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	30 mm[1.181 in]
Compatible Insulation Diameter Range	3.1 – 4.1 mm[.122 – .161 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	3500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 720725-1
DAHT 250 FASTIN-ON TAB REC 18-14 ASSY

TE Part # 2150046-2
OCEAN_2.0_APPLICATOR-E-110F160F-REA

TE Part # 7-2150046-7
OCEAN_2.0_SPARE_PART_KIT-110F160F

TE Part # 7-2150346-7
OC-110F160OV-CRIMPTOOLINGKIT

Also in the Series | FASTIN-FASTON 250

Crimp Terminal Housings(208)

Insertion & Extraction Tools(2)

PCB Terminals(2)

Quick Disconnects(251)

Customers Also Bought


TE Part #2-6609104-4
PE0S0DS6B=C1255

TE Part #DT04-08PA-CE03
REC, 8P, BLK, E, CAP, A

TE Part #180352-2
FF 250 TAB 4-6MM2 PTBR

TE Part #160366-2
FF 110 SR. REC 22-20AWG TPBR



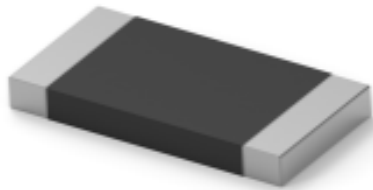


TE Part #7-2176422-9
TLRP 2512 3.0W R180 1% 50PPM 4K RL




TE Part #1-967623-4
Timer Connector Housing



TE Part #3-1904117-4
V23134J0165X537-EV-CBOX



TE Part #160644-3
SPLICE 20-15 AWG .016 TPBR

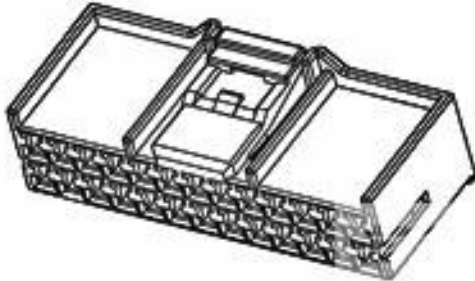

TE Part #936201-1
090III 16P PLUG ASSY

Documents

Product Drawings

FF 250 TAB 18-14AWG TPPB

English

CAD Files

Customer View Model

ENG_CVM_CVM_160450-2_N.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_160450-2_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_160450-2_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Application Specification

English