


# Actuator

704.340.008

Distribution by  
DigiKey


**DigiKey**

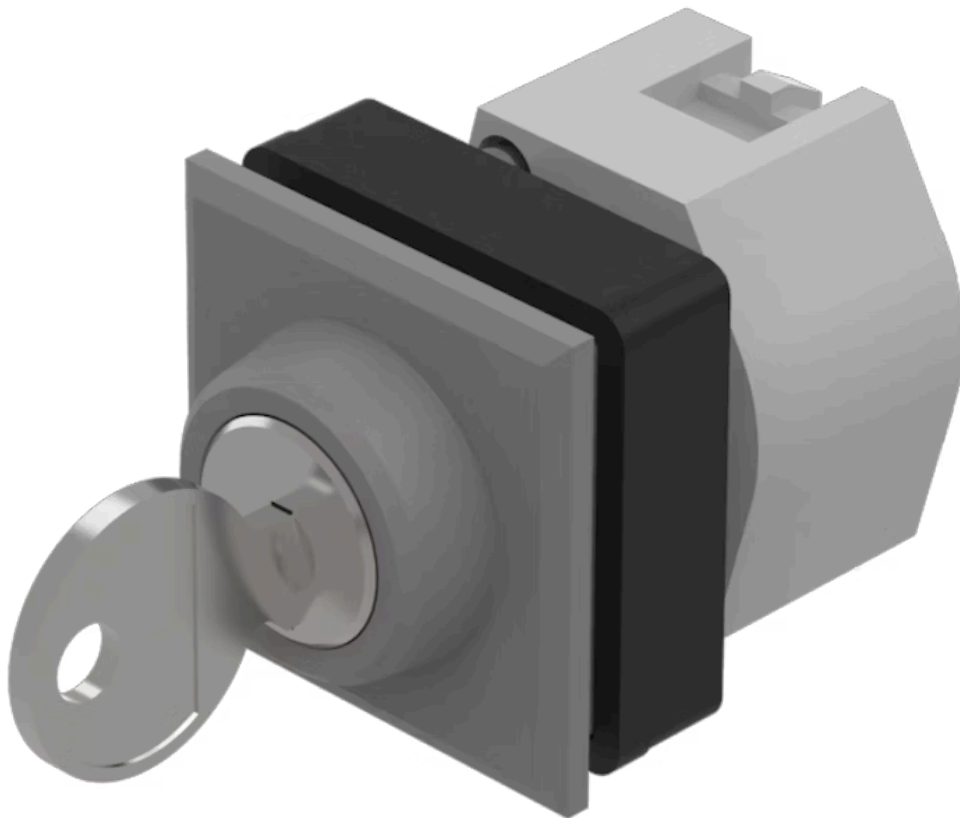

<https://digikey.eao.com/p/704.340.008>

Your product:

---



## 704.340.008 Actuator

### FRONT

Front bezel colour:	Silver
Front bezel material:	Plastic
Front dimension:	35 mm x 35 mm

### MOUNTING

Mounting cut-out:	30 mm x 30 mm
Design:	flush

### ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

### MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤50 000 cycles of operation
Switching positions:	2 positions
Switching action:	Rest - Maintained (a)
Weight:	0.099 kg
Switching angle:	90° right / -45° ... +45°

### AMBIENT CONDITION

**Storage temperature:** – 40 °C ... + 85 °C

**IP Protection:** IP65 front side

**Operating temperature:** – 40 °C ... + 55 °C

## OTHER

**max. number of switching elements:** 3


**Short Description:** Actuator, 30 mm x 30 mm, 35 mm x 35 mm, Silver, Plastic, Rest - Maintained (a)

**Hints:** The standard lock Ronis 251, Further lock numbers on request, Max. 3 switching elements can be clipped on

**Wiring diagrams:**




**Mounting cut-outs:**

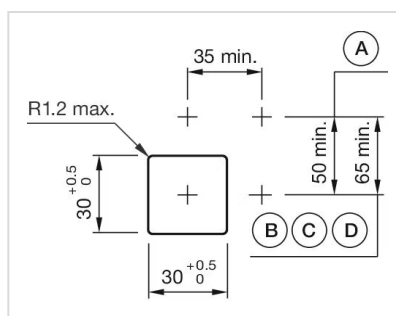


A = Screw terminal  
B = Push-in terminal (PIT)  
C = Plug-in terminal 6.3 mm x 0.8 mm  
D = Double plug-in terminal 6.3 mm x 0.8 mm

**Switching positions:**

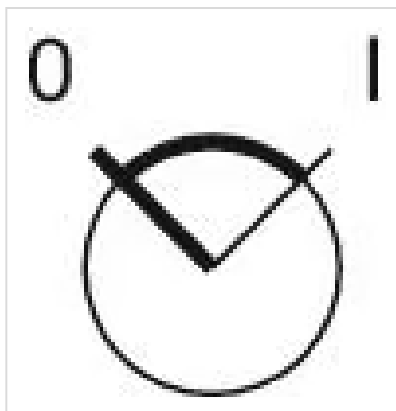

**Dimension drawings:**

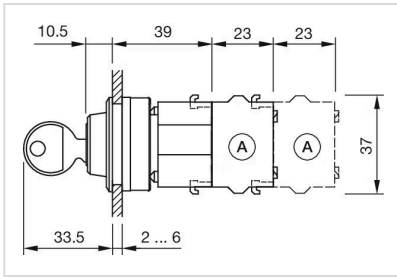

A = Screw terminal