



Description

The ESD56241D18-3/TR TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lighting.

The ESD56241D18-3/TR is in a DFN2X2-3L package and will protect one unidirectional line. It may be used to provide ESD protection up to $\pm 30\text{kV}$ (Contact and air discharge) according to IEC61000-4-2, and withstand peak pulse current up to 180A (8/20 μs) according to IEC61000-4-5.

Features

- Transient protection for high-speed data lines
IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Air)
 $\pm 30\text{kV}$ (Contact)
- Peak power dissipation: 5460W (8/20 μs)
- Working voltages : 18V
- Low leakage current
- Low clamping voltage
- Ultra-small package (2.0mmx2.0mmx0.5mm)
- Solid-state silicon-avalanche technology

Machanical Data

- DFN2X2-3L package
- Flammability Rating: UL 94V-0
- Packaging: Tape and Reel
- High temperature soldering guaranteed:
260 $^{\circ}\text{C}$ /10s
- Reel size: 7 inch


Ordering Information

- Device: ESD56241D18-3/TR
- Package: DFN2X2-3L
- Material: Halogen free and RoHS compliant
- Packing: Tape & Reel
- Quantity per reel: 3,000pcs


Applications

- Power lines
- Personal digital assistants (PDA's)
- Microprocessors based equipment
- Notebooks, Desktops, and Servers
- Cell phone Handsets and Accessories
- Portable Electronics
- Peripherals

Pin Configuration



Package Outline





Absolute Maximum Rating


Symbol	Parameter	Value	Units
V _{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±30 ±30	kV
P _{PP}	Peak Pulse Power (8/20μs)	5460	W
T _{OPT}	Operating Temperature	-55~125	°C
T _{STG}	Storage Temperature	-55~150	°C
T _L	Lead Soldering Temperature	260(10sec)	°C

Electrical Characteristics (T_{amb}=25°C)


Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V _{RWM}	Reverse Working Voltage				18	V
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA	19	20	23	V
I _R	Reverse Leakage Current	V _{RWM} = 18V			1	uA
I _{pp}	Peak Pulse Current	t _p = 8/20μs			140	A
V _C	Clamping Voltage	I _{PP} = 30A, t _p = 8/20μs			26	V
		I _{PP} = 100A, t _p = 8/20μs			34	V
		I _{PP} = 140A, t _p = 8/20μs			39	V
C _J	Junction Capacitance	V _R = 0V, f = 1MHz	700	900	1100	pF



Electrical Characteristics Curve

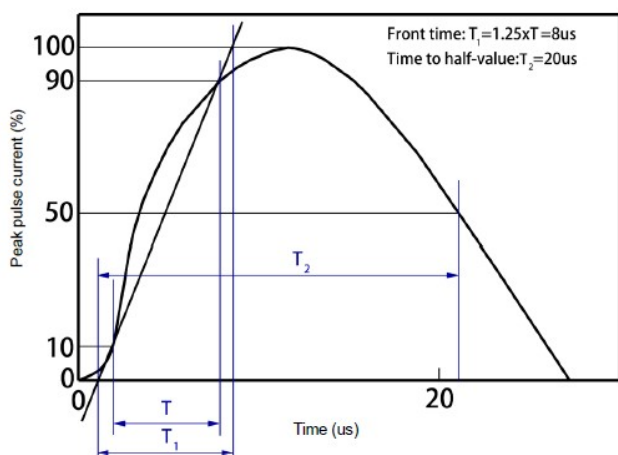


8/20 us waveform per IEC61000-4-5

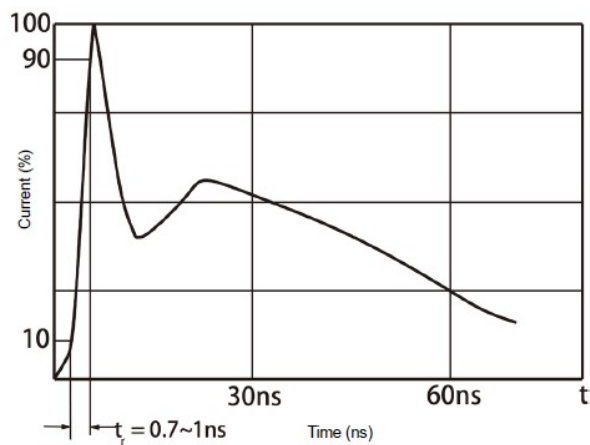


Contact discharge current waveform per IEC61000-4-2

Outline And Dimensions


Top view




Side view

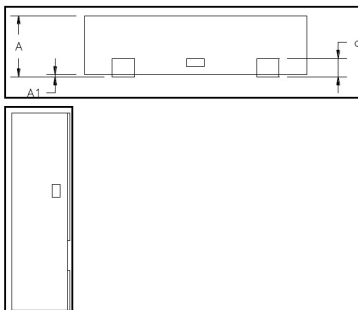

Back view



Soldering Pattern



SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
A1	0.00	0.02	0.05
b	0.25	0.30	0.35
b1	0.20 REF.		
c	0.152 REF.		
D	1.90	2.00	2.10
D2	1.40	1.50	1.60
e	1.30BSC		
E	1.90	2.00	2.10
E2	0.95	1.05	1.15
E3	0.20	0.30	0.40
L	0.35	0.40	0.45
L1	0.20	0.25	0.30
h	0.20 REF.		
K	0.20	0.30	0.40

Notice:

- 1.Lead plating: Pb free solder
- 2.Lead thickness includes solder plating
- 3.Lead frame: Copper A194
- 4.Other Tolerance: ± 0.05
5. Dimensions are exclusive of Burrs,Mold Flash and Tie Bar extrusions
- 6.Unit: mm



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.