REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020.06.12

ROHS

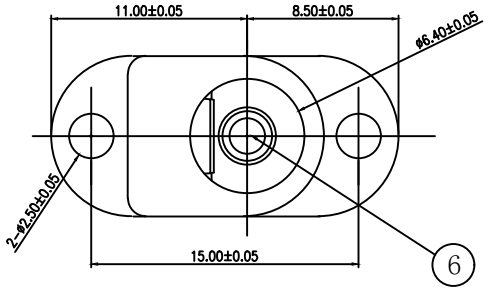

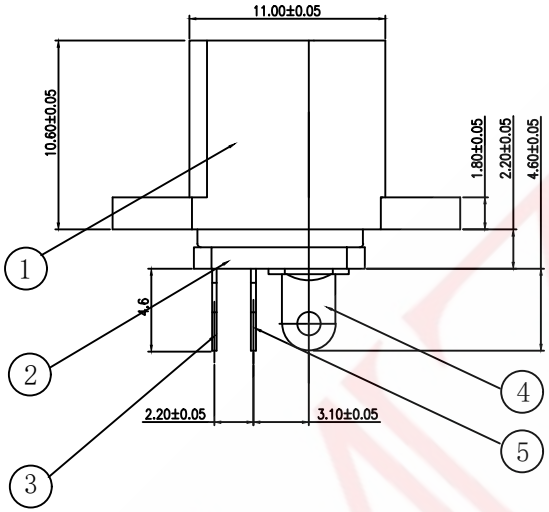

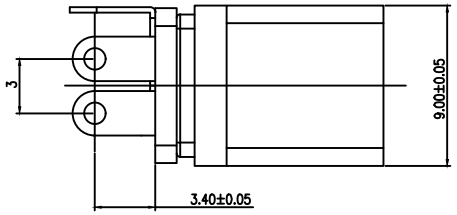

主要技术性能

1. 额定电负荷： 24V 5A;
2. 绝 缘 电 阻：≥100MΩ;
3. 耐 压：AC500V(50Hz)/min;
4. 插 拔 力：3～25N;
5. 寿 命：5,000次。

电路原理图





线路板开孔尺寸

9C L 3 128 B E G A

- Model Definition
- Mould Number: MX01715
- Needle Diameter: 2.5 mm
- Fixing Method: Without Fixed Column
- Interface Method: Conventional Interface
- Overall Length: 15.2 mm
- Pin Position: 3 Pin
- Mounting Method: Vertical Plug-in
- Product Series: DC Power Jacks

序号	名 称	数量	材 料	镀涂
6	插 针	1	H62黄铜棒	亮锡
5	弯 片	1	H62黄铜带(Y) δ=0.30mm	镀银
4	平 片	1	H62黄铜带(Y) δ=0.30mm	镀银
3	簧 片	1	C1591磷铜带 δ=0.25mm	镀银
2	后 盖	1	PPA δ=1.20mm	黑色
1	基 座	1	PPA	黑



			GENERAL TOLERANCE	
			≥0~2<	±0.15
DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW



SCALE	1:1	UNIT	mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: 大电流立式插件 3pin
DWG NO: 9CL3128-A017
PART NO: 9CL3-2301725
MODEL NO: 9CL3128BEGA
NAME: DC JACK