
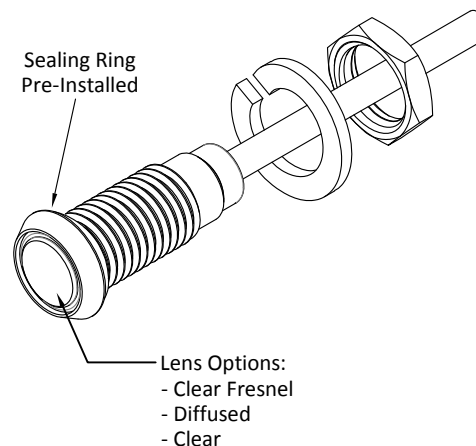
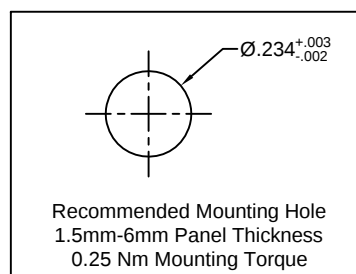


REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	05/12/17	J. C.

*Length "X.XXX"	Tolerance
2.000" ~ 16.000"	±0.050"
16.001" ~ 40.000"	±0.150"
40.001" ~ 80.000"	±0.300"
80.001" ~ 500.000"	±0.5%

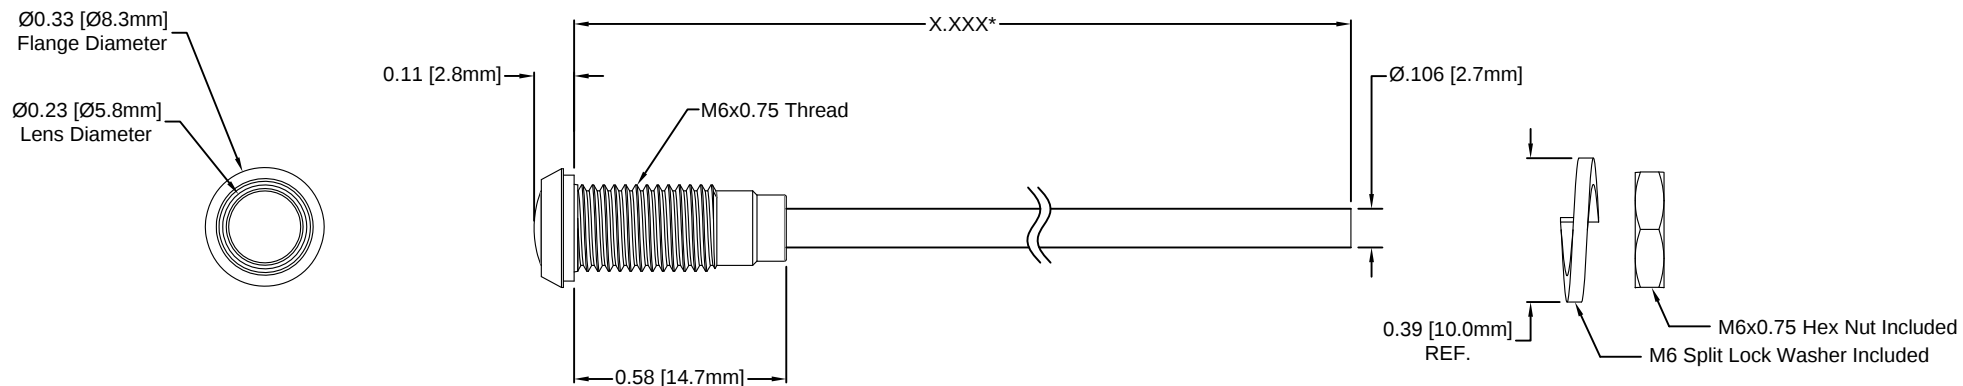

Part Number Configuration
LC3-6.500-F6PX67PR

Lens Options:
Z – Clear Fresnel
D – Diffused
Blank – Clear

Length in 0.001"
Increments Only

NOTES:

1. SEALED TO IP67 RATING
2. ROHS COMPLIANT
3. MOUNTING HARDWARE SHIPPED NON-ASSEMBLED
4. MINIMUM BEND RADIUS OF FLEXIBLE LIGHT PIPE: 1.06" [27mm]

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
<u>DECIMALS</u>	<u>ANGULAR</u>		
.X ± .1	X° ± 1°		
.XX ± .02			
.XXX ± .010		TITLE: IP67 RATED PANEL MOUNT FLEXIBLE LIGHT PIPE INDICATOR	
DESIGNED: TD. Nguyen	DATE: 04/30/17	PART NO: LC3-X.XXX-F6PX67PR	
CHECKED: K. Baron	DATE: 04/30/17	REVISION A	
		CAGE CODE : 32559 SHEET # 1 OF 1	
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			