
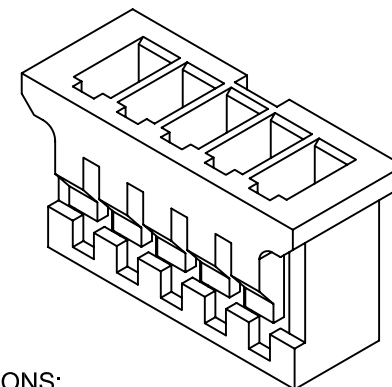
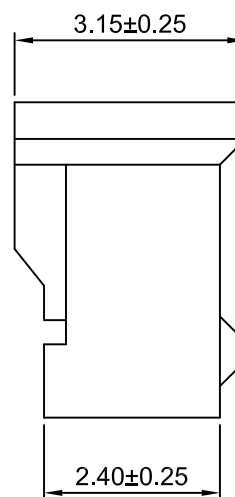
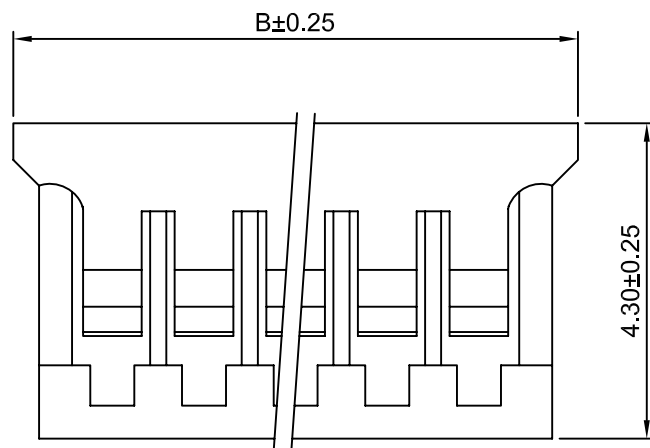


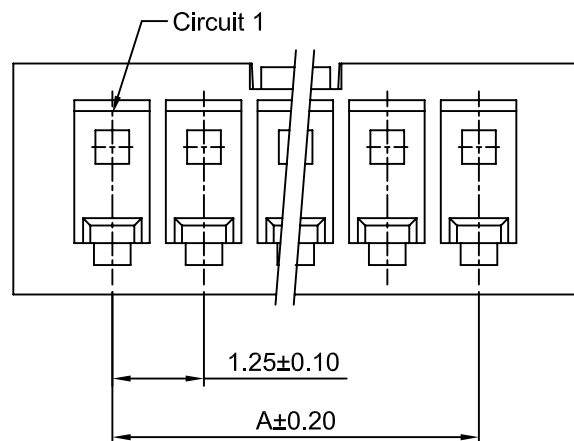

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Reddish brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	3.95	9P	10.00	12.70
3P	2.50	5.20	10P	11.25	13.95
4P	3.75	6.45	11P	12.50	15.20
5P	5.00	7.70	12P	13.75	16.45
6P	6.25	8.95	13P	15.00	17.70
7P	7.50	10.20	14P	16.25	18.95
8P	8.75	11.45	15P	17.50	20.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1
Draw BY:		Approved :
LIZQ		GONGYB

Title :		1.25mm PITCH	
		HOUSING	
DRAW NO :		A1253H-XP	REV A0

General Tolerance		
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

x.x≤0.25	ANGLE±
x.xx≤0.20	
x.xxx≤0.15	