



Micro Commercial Components




Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BAV70M

Features

- Halogen free available upon request by adding suffix "-HF"
- Lead Free Finish/Rohs Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- High conductance
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Fast switching speed

Marking : A4



Maximum Ratings


- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Non-Repetitive Peak reverse voltage	V_{RM}	100V	
Peak Repetitive Reverse Voltage	V_{RRM}	75V	
Working Peak Reverse Voltage	V_{RWM}		
DC Reverse Voltage	V_R		
Average rectified output current	I_O	200mA	
Non-Repetitive Peak Forward Surge Current	I_{FSM}	2A 1A	@1us @1s
Repetitive Peak Forward Current	I_{FRM}	450mA	
Power Dissipation	P_D	150mW	
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	357°C/W	
Maximum Instantaneous Forward Voltage	V_F	0.715V 0.855 1.0V 1.25V	$I_{FM}=1mA$; $I_{FM}=10mA$; $I_{FM}=50mA$; $I_{FM}=150mA$;
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	2.5μA 25nA 50μA 30μA	$V_R=75Volts$ $V_R=25Volts$ $V_R=75Volts, T_j=150^{\circ}C$ $V_R=25Volts, T_j=150^{\circ}C$
Diode Capacitance	C_D	2pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	4ns	$I_F=I_R=10mA, I_R=1mA$, $V_R=5V, R_L=100\Omega$


150mW Switching Diode





SOT-723

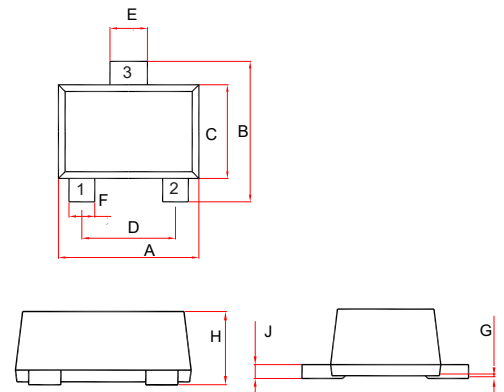

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.043	.051	1.10	1.30	
B	.043	.051	1.10	1.30	
C	.028	.035	0.70	0.90	
D	.031TYP.		0.80TYP.		
E	.009	.017	0.22	0.42	
F	.005	.013	0.12	0.32	
G	.000	.002	.000	.050	
H	.017	.021	0.43	0.54	
J	.003	.006	.080	.150	

Recommended Solder Pad(Unit:mm)
(Tolerance: +/-0.05mm)

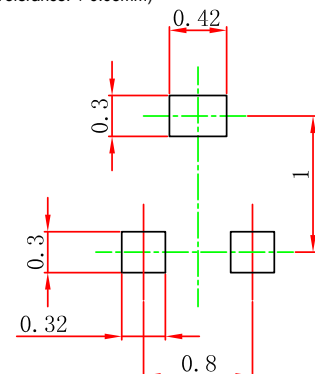

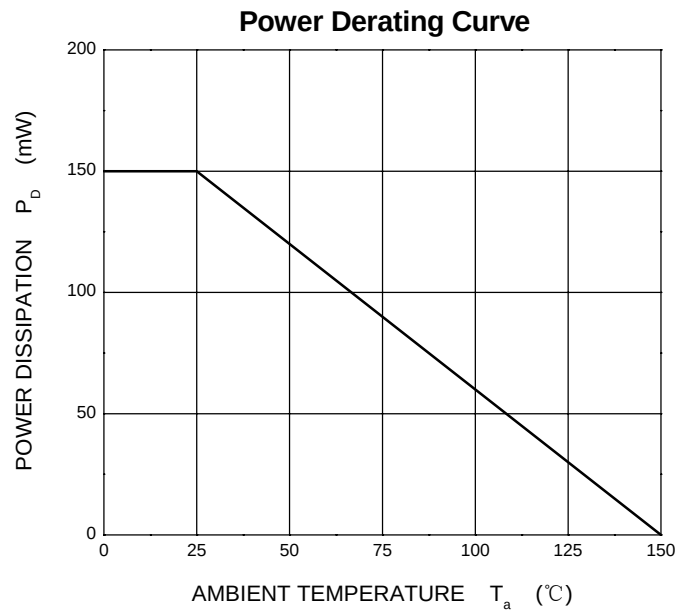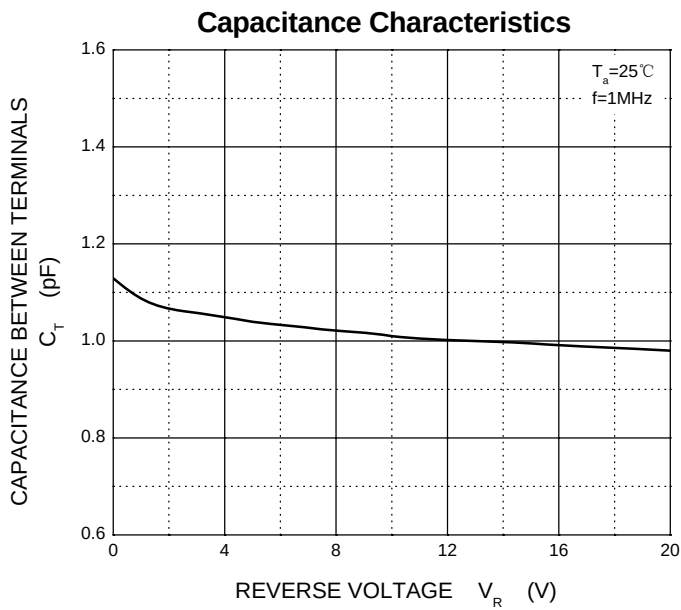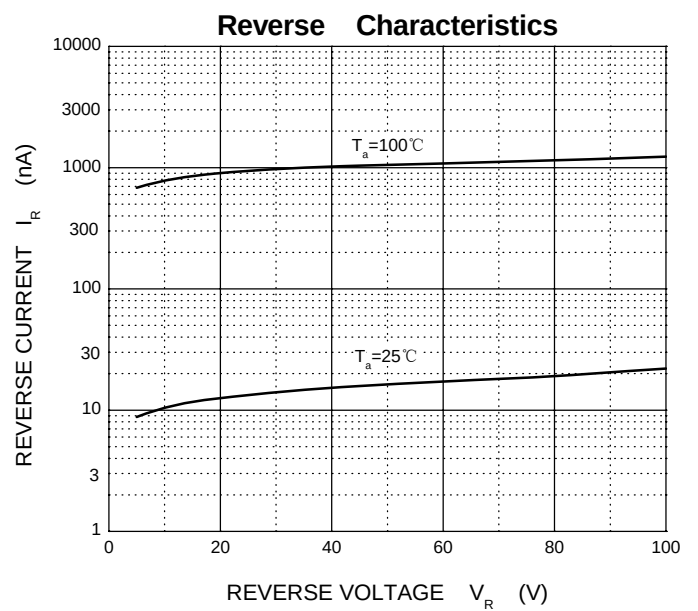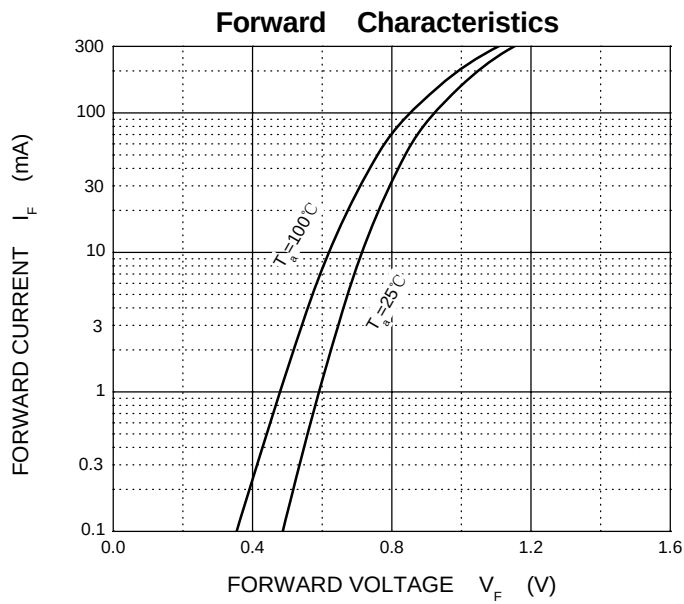



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 8Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[BAV70M-TP](#)