


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

A


0.2 ± 0.05

41.5 ± 0.2

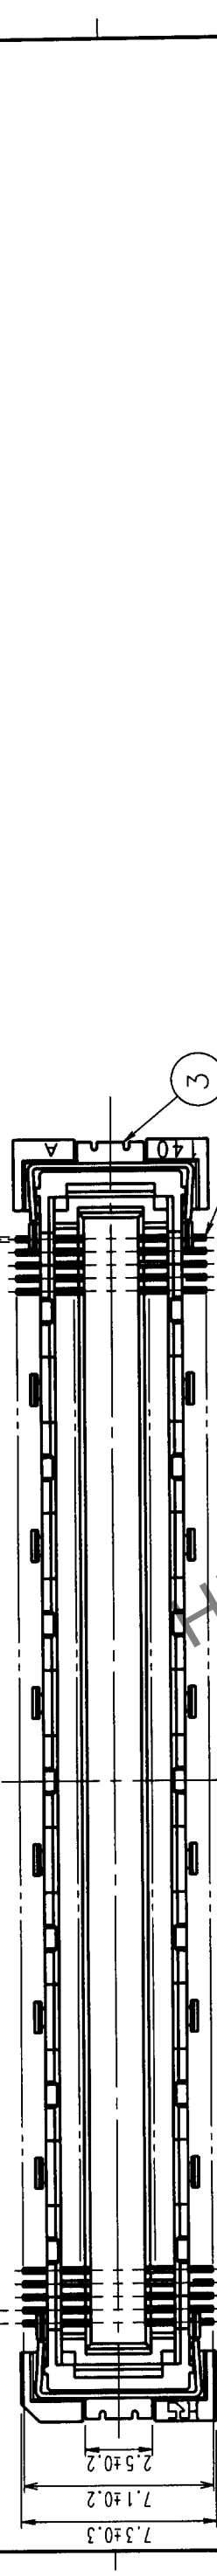

B

49.1 ± 0.3

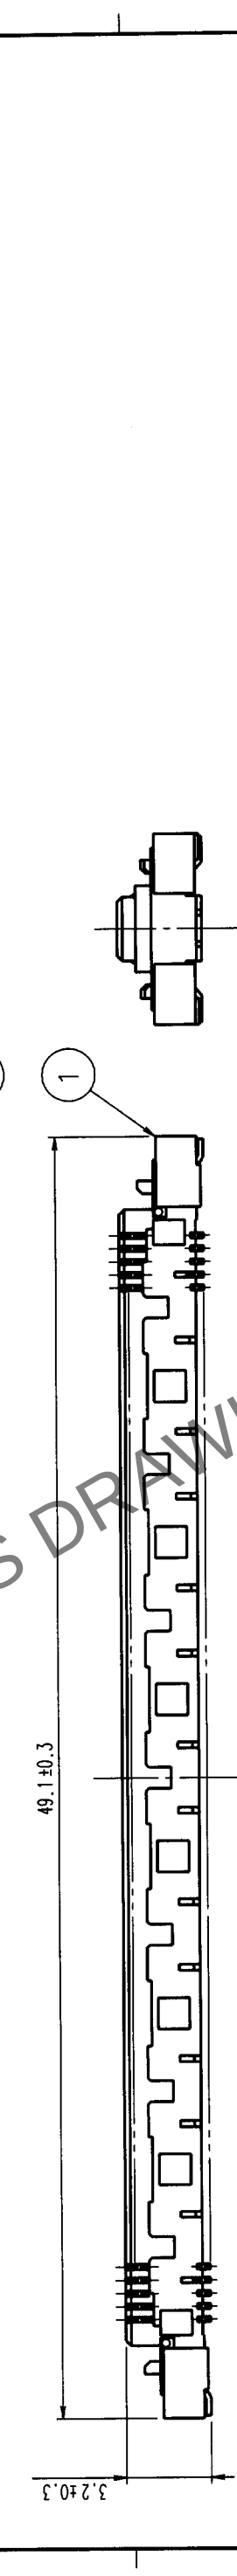


C

RECOMMENDED LAND PATTERN



D

0.5 ± 0.03

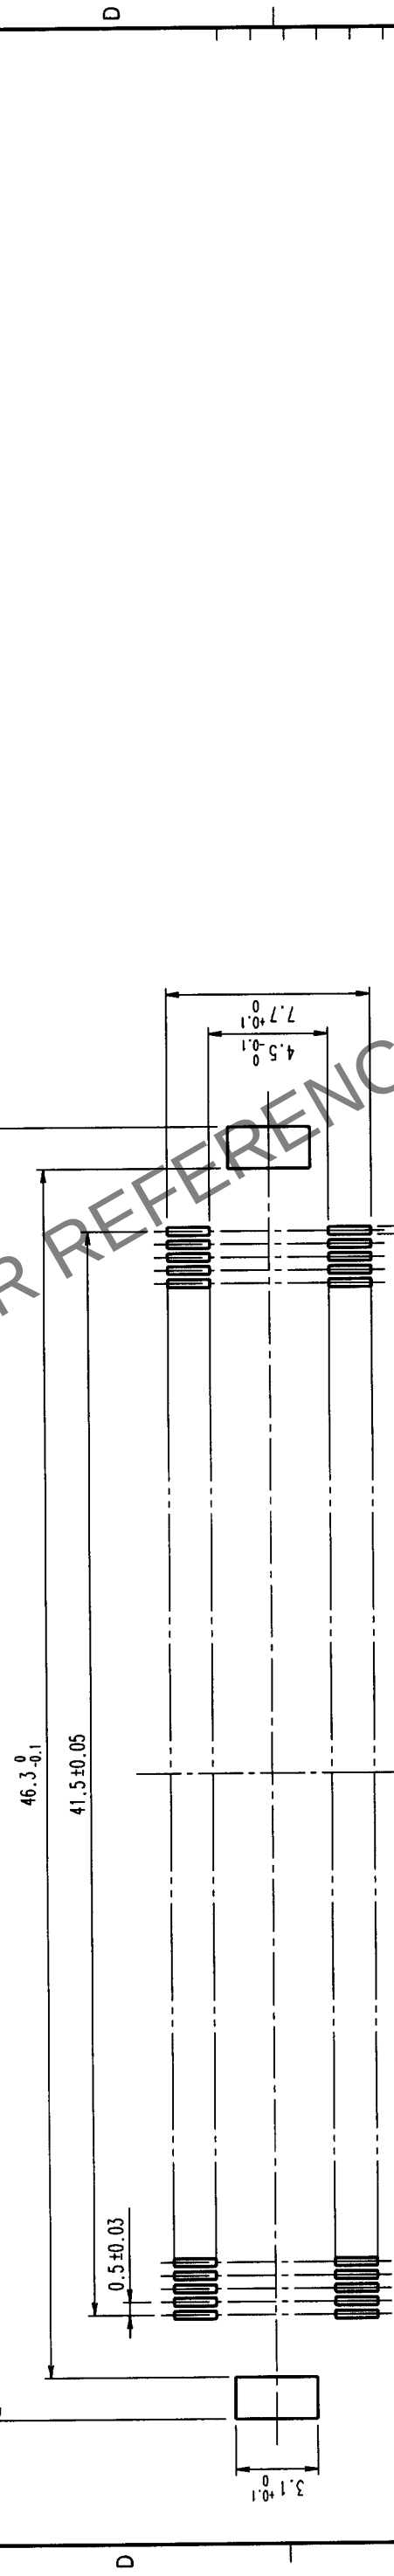

E

3	PHOSPHOR BRONZE	TIN PLATED
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD PLATED (FLASH) OVER NICKEL
1	LCP	BEIGE UL94V-0

F

NO.	MATERIAL	FINISH, REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL			J. Takada	J. Takada	M. Sakata	J. Takada	
			99.10.18	99.10.18	99.10.18	99.10.18	

DRAWING NO. EDC3-151991

PART NO. FX10B-168S-SV

SCALE 4 : 1

UNITS mm

HIROSE ELECTRIC CO., LTD.

CL570-0254-0

1/1

NOTES

- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.

TO
PCK