



Terminals & Splices > Automotive Terminals > MCON Receptacle and Tab



Terminal Type: **Receptacle**

Mating Tab Width: **1.2 mm [.047 in]**

Mating Tab Thickness: **.6 mm [.024 in]**

Terminal Transmits: **0 – 24 A (Low Power)**

Wire Size: **20 – 18 AWG**

[All MCON Receptacle and Tab \(65\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Clean Body

Contact Features

Contact Size	1.2mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	11.75 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	1.2 mm[.047 in]
Mating Tab Thickness	.6 mm[.024 in]
Interface Plating	Tin (Sn)

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire



Dimensions

Compatible Insulation Diameter Range	1.3 – 1.9 mm[.051 – .074 in]
Wire Size	.5 – .75 mm²
Wire Size Search	18 AWG, 19 AWG, 20 AWG

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

Operation/Application

Conforms to KOMAX Automatic Component Insertion Guideline	Yes, per Version 5.0 (March 2018)
Compatible With Wire Base Material	Copper

Industry Standards

Compatible With Agency/Standards Products	LV214
---	-------

Packaging Features

Packaging Quantity	9000
Packaging Method	Reel

Other

Terminal Transmits	0 – 24 A (Low Power)
--------------------	----------------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free





Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

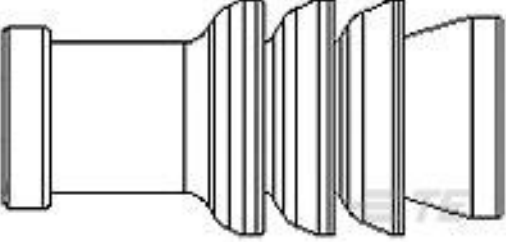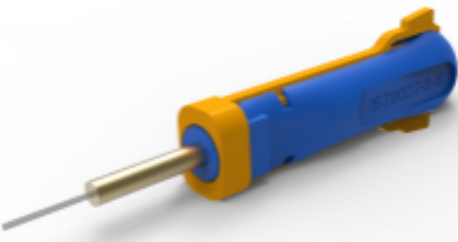 TE Part # 967056-1 MQS BLINDSTOPFEN4MM	 TE Part # 967067-1 MQS SGL WIRE SEAL	 TE Part # 967067-2 MQS EINZELLEITDICHT	 TE Part # 1579007-8 EXTRACTION TOOL
 TE Part # 9-1452380-9 96 POS. CONNECTOR ASSY	 TE Part # 964972-1 EINZELLEITERDICHTNG	 TE Part # CAT-AM705-CH8172 AMP MCP, SEALED CONNECTOR HOUSING	 TE Part # 1718350-1 MCON 1.2 CB TAB STC SN
 TE Part # 1-2137336-1 36 POS PLUG ASSEMBLY	 TE Part # CAT-H3399-CH8172 Heavy Duty Sealed Connector Series Housings	 TE Part # 1-1579007-0 EXTRACTION TOOL	 TE Part # 9-1563173-9 96POS,MCON-1.2 CB,REC HSG,ASSY



TE Part # 2278584-1
67 POS, MIXED, REC HSG, ASSY,
SEALED TYPE180

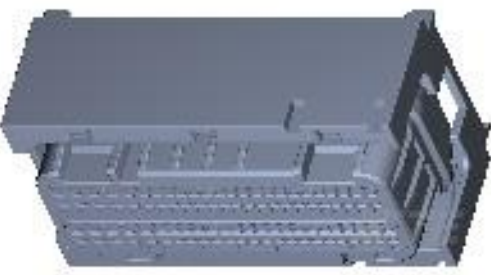

TE Part # 9-1452423-9
96 POS. CONNECTOR ASSY




TE Part # 2203973-1
26P SEALED PLUG, ASSY, KEY A



TE Part # 9-1452415-9
58POS CONNECTOR ASSY F.
CONNECTOR154POS




TE Part # 2272975-1
6 Pos. Sealed MCON 1.2 Connect

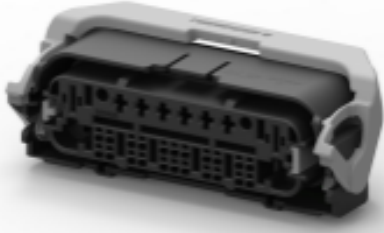

TE Part # 2301462-1
30POS, HYBRID, REC HSG ASSY, SLD,
COD A



TE Part # 9-1563172-9
58POS, MIXED, REC HSG, ASSY

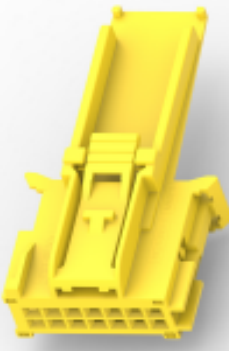

TE Part # 1924393-1
14P MCON 1.2 SCCM Outer Housing

Also in the Series | AMP MCP Hybrid Coax



Automotive Housings(8)



Automotive Terminals(38)




Crimp Wire Pins, Tabs & Ferrules(2)

Also in the Series | MCON 1.2mm



Automotive Connector Caps & Covers
(18)



Automotive Connector Locks &
Position Assurance(10)



Automotive Housings(328)



Automotive Terminals(96)



Connector Seals & Cavity Plugs(11)




Insertion & Extraction Tools(5)




Other Automotive Connector Accessories(7)

Customers Also Bought

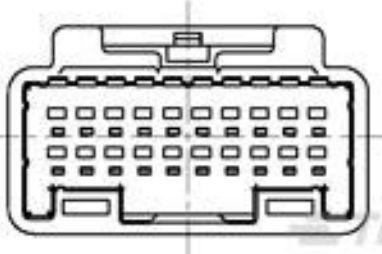

TE Part #1473750-1
025 20POS CAP ASSY W TO W



TE Part #9-1419166-0
GET;1X8 MALE CONNECTOR ASSY



TE Part #1718350-1
MCON Receptacle and Tab



TE Part #1-1438299-1
GET MALE TERM, B, AG REREEL



TE Part #1-2298166-2
24POS,MCON 1.2,REC HSG ASSY



TE Part #2112758-1
COVER



TE Part #1-2112778-3
58POS, MIXED,REC HSG,1452415, ASSY,SEALED



TE Part #1-2137332-5
36PIN THROUGH WALL FIX RING



TE Part #3-1803767-1
CRIMPER,WIRE F

Documents

Product Drawings

MCON 1.2 CB REC SRC SN

English

MCON 1.2 CB REC SRC SN

German

CAD Files

Customer View Model

ENG_CVM_1670144-1_F2.3d_igs.zip



English

Customer View Model

[ENG_CVM_1670144-1_F2.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1670144-1_F2.2d_dxf.zip](#)

English

[3D PDF](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

German

[Application Specification](#)

English

[Application Specification](#)

English