
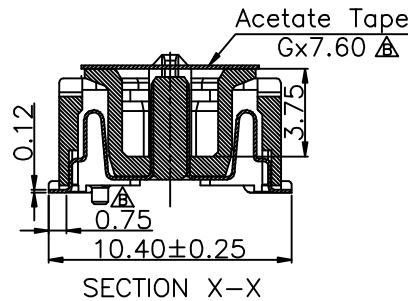



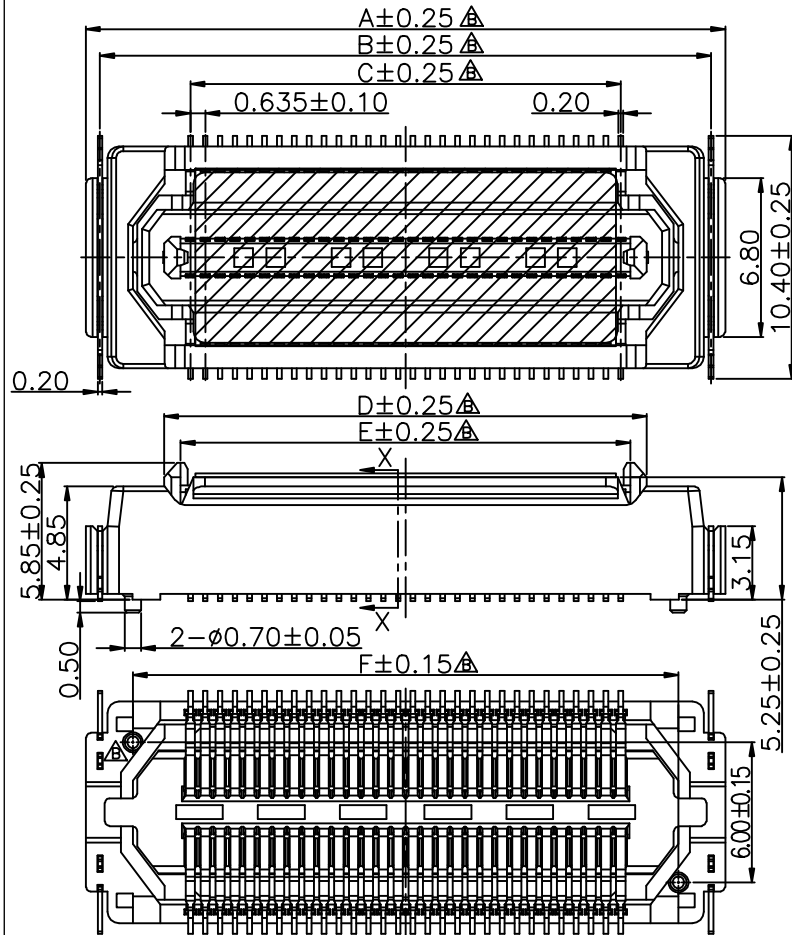


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2020.12.16	Cao Liang
B	△	Add Product Specifications And The cylinders change direction.	2021.02.17	Cao Liang

Specifications

Current Rating:0.5Amp
Insulation Resistance:500MΩ Min.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:100mΩ Max.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information						
	A	B	C	D	E	F	G
2x30	27.35	26.15	18.415	20.65	19.25	23.35	18.00
2x40	33.70	32.50	24.765	27.00	25.60	29.70	24.35

Recommended P.C.Board
Layout
(Tolerance:±0.05)

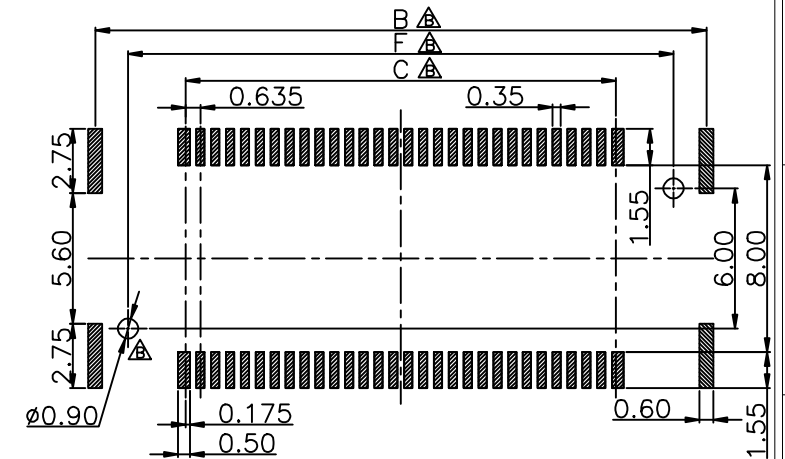

Ordering Information

G GZC201 - XX XX B 001 C 1 S X

No. Of Pins Per Row
30,40

Standard Plating
02=Gold Flash
09/N5=AU plating △

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel



REV. B UNIT. mm SCALE. 3:1

3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED: Cao Liang DATE: 2021.02.17
CHECKED: Qiu Guoyan DATE: 2021.02.17
APPROVED: Qiu Guoyan DATE: 2021.02.17

DWG. NO. GGZC201-CB1CS
PART NO. GGZC201-XXXXB001C1SX

TITLE. 0.635mm PITCH BTB FLOATING CONNECTOR