




Terminals & Splices > Ring Terminals

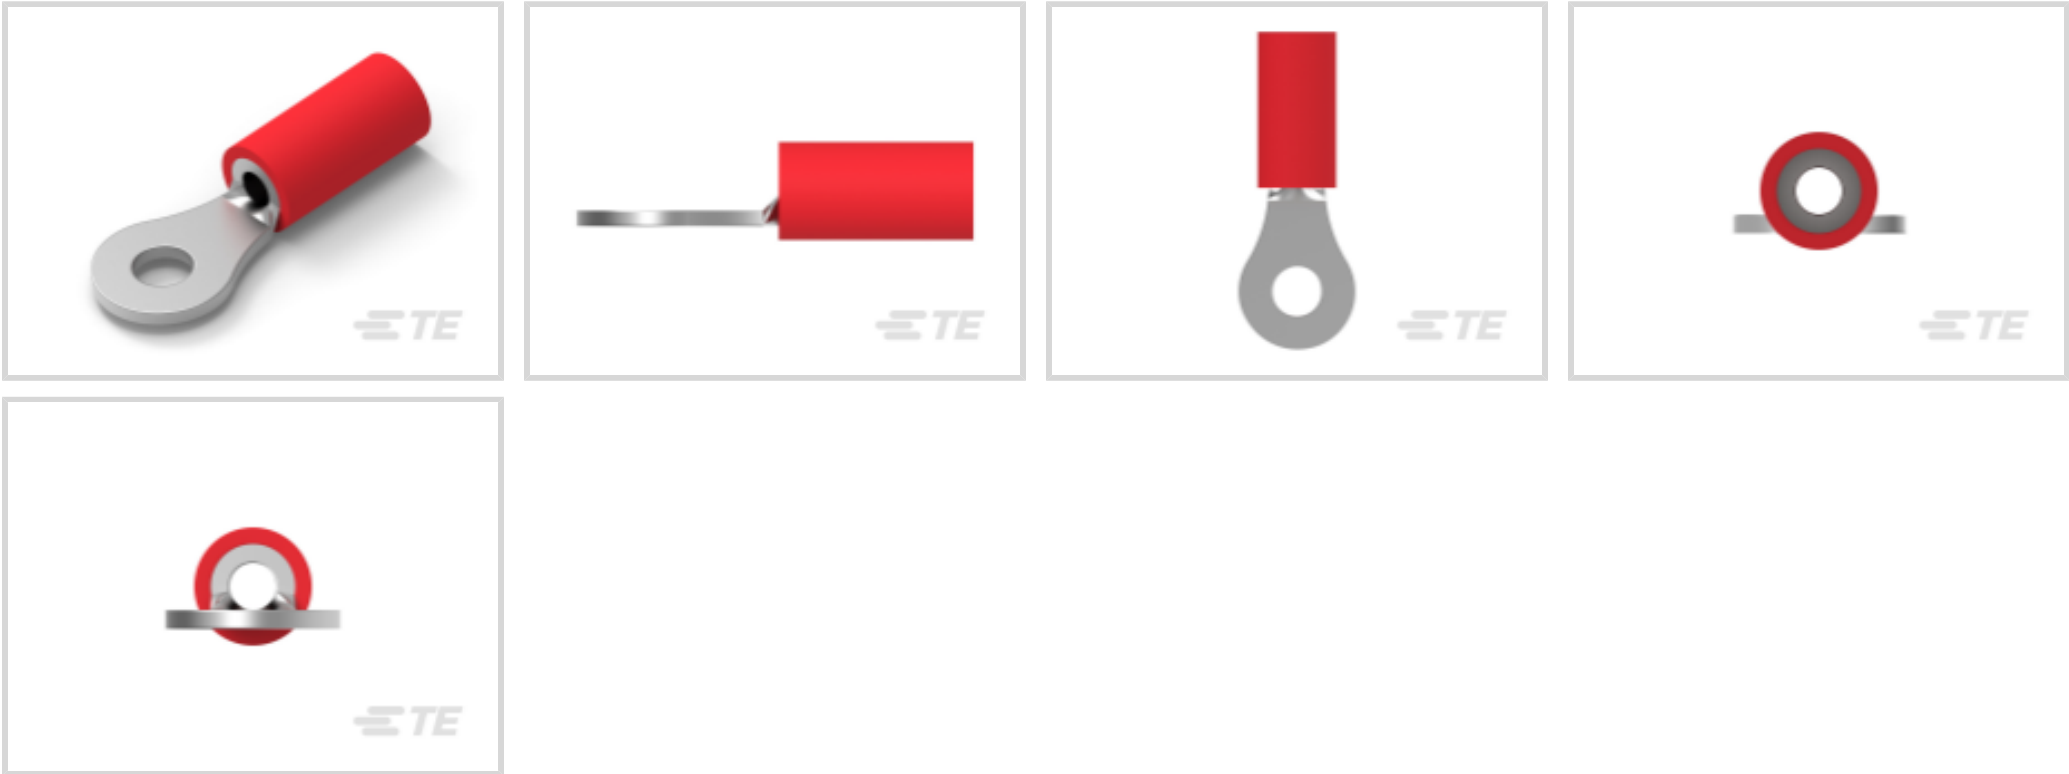

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 509 – 3260 CMA

Stud Size: #4, M2.5

Features

Product Type Features

|                                        |                             |
|----------------------------------------|-----------------------------|
| Ring Terminal Product Type             | Closed Ring Tongue Terminal |
| Stud Size                              | #4, M2.5                    |
| Sealable                               | No                          |
| Wire Insulation Support Retention Type | Insulation Support          |

Configuration Features

|                 |   |
|-----------------|---|
| Number of Holes | 1 |
|-----------------|---|

Electrical Characteristics

|                |       |
|----------------|-------|
| Voltage Rating | 600 V |
|----------------|-------|

Body Features

|                         |     |
|-------------------------|-----|
| Insulation Sleeve Color | Red |
| Stripe Color            | Red |

Contact Features

|                           |          |
|---------------------------|----------|
| Barrel Type               | Closed   |
| Terminal Orientation      | Straight |
| Terminal Plating Material | Tin      |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|                                      |                               |
|--------------------------------------|-------------------------------|
| Wire Size                            | 509 – 3260 CMA                |
| Stud Diameter                        | 3.02 mm[.119 in]              |
| Tongue Thickness                     | .79 mm[.031 in]               |
| Product Length                       | 20.55 mm[.809 in]             |
| Compatible Insulation Diameter (Max) | 3.56 mm[.14 in]               |
| Compatible Insulation Diameter Range | 2.67 – 3.56 mm[.105 – .14 in] |

Usage Conditions

|                             |                     |
|-----------------------------|---------------------|
| Insulation Option           | Partially Insulated |
| Operating Temperature Range | 105 °C[221 °F]      |

Operation/Application

|                                       |        |
|---------------------------------------|--------|
| Compatible With Wire Base Material    | Copper |
| Compatible With Wire Plating Material | Tin    |

Industry Standards

|                               |    |
|-------------------------------|----|
| Government Qualified Terminal | No |
|-------------------------------|----|

Packaging Features

|                    |             |
|--------------------|-------------|
| Packaging Quantity | 1000        |
| Packaging Method   | Loose Piece |

Product Compliance


For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts
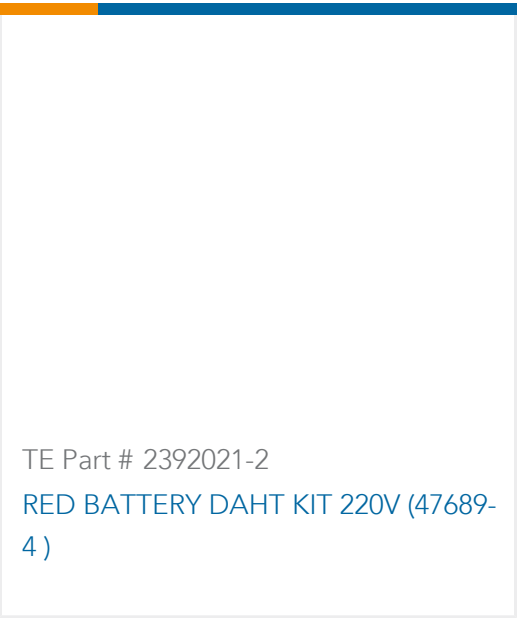
|                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |



TE Part # 2392021-1  
RED BATTERY DAHT KIT 110V (47689-4)



TE Part # 169404  
CERTI-LOK DIE



TE Part # 1SET191001R0000  
CRIMP-HT



TE Part # 1SET191002R0000  
TET CRIMP-HT

Also in the Series | **PLASTI-GRIP**




Compression Connectors(3)



Crimp Wire Pins, Tabs & Ferrules(19)



Ring Terminals(300)

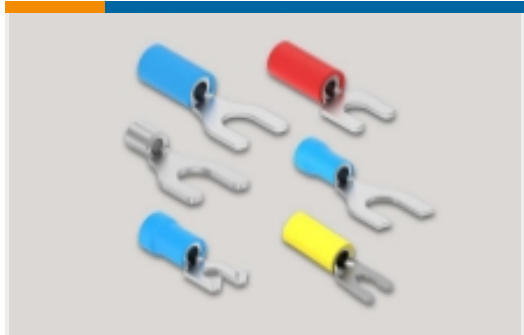

Spade Terminals(160)



Splices(46)

Customers Also Bought



TE Part #1658614-4  
09 POS HDF RCPT, AP, LEAD FREE




TE Part #7-338728-8  
MICROM. MOB SMD CON



TE Part #1-1879453-7  
TE 1000W 22R 5% Bracket




TE Part #1625960-1  
HBA RE 100M 1% 100PPM

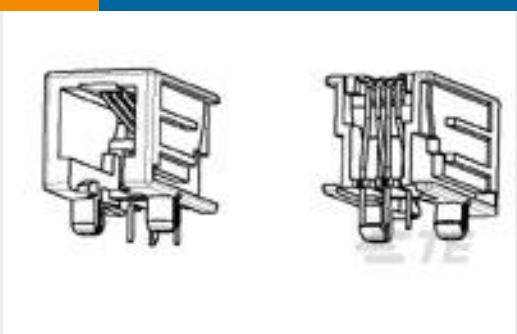


TE Part #1-1705949-1  
Modular Jack SE, 4/4, Gold flash



TE Part #794219-1  
MINI UMN2 SOK 26-22 AWG SN

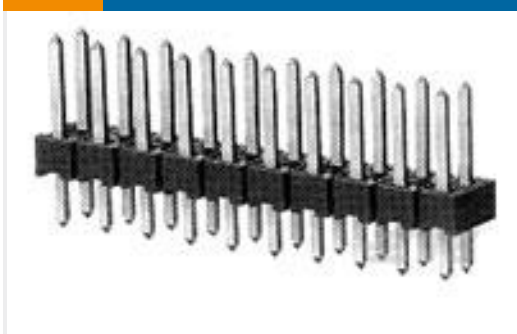

TE Part #8-146250-6  
72 MODII HDR DRST B/A .100CL

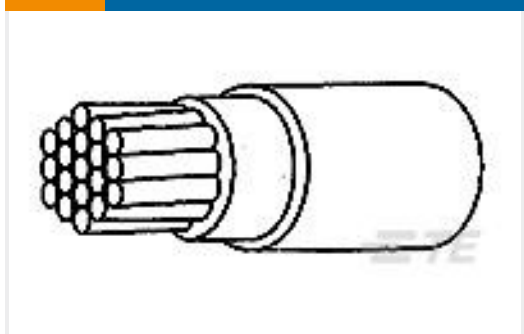

TE Part #8872133001  
FLT0111-0.50-6



Documents

Product Drawings

PG R 22-16 COMM 22-18 MIL 4

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_34143\_S.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_34143\_S.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_34143\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English

UL Report

English

UL Report

English