

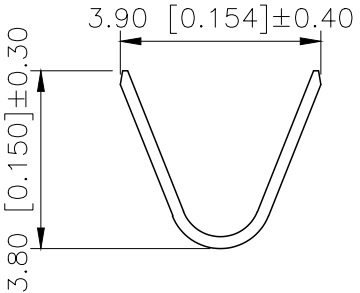
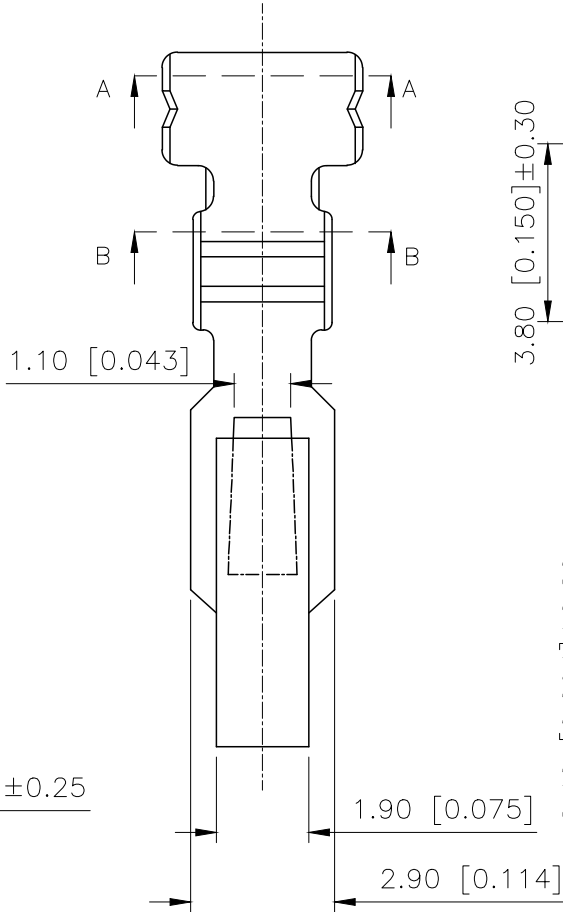


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.18	阿树

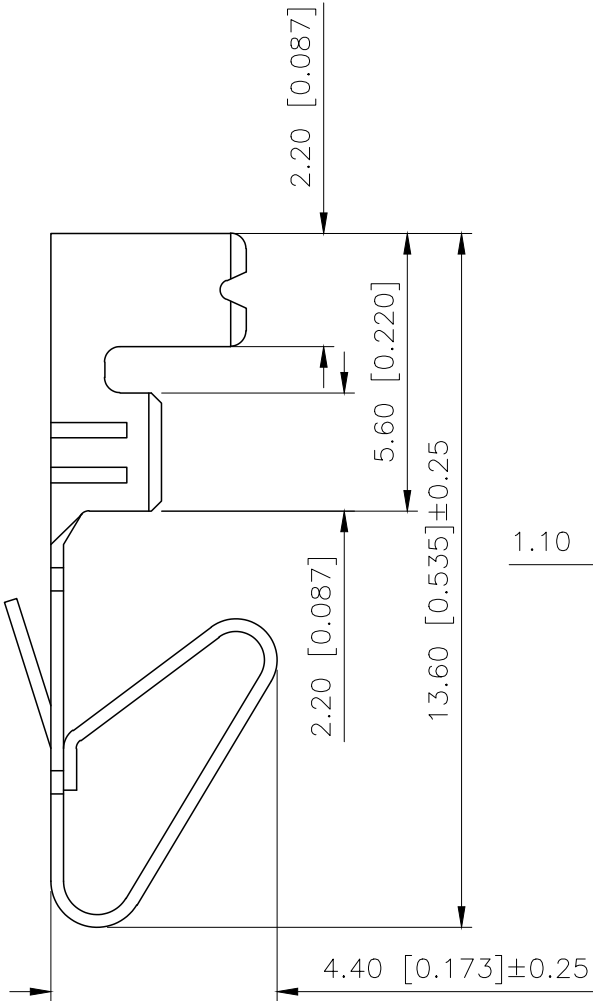

SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1

Specifications:
Voltage rating:250V AC/DC
Current rating:5A AC/DC
Withstanding voltage:1500V AC/minute
Temperature range:-40℃-+125℃
Insulation resistance:≥1000MΩ
Contact resistance:≤20mΩ
Material:Phosphoric bronze Tin-plated
Applicable Wire Sizes:AWG#18~22

PART NO.:

X5080 I-P SN
① ② ③ ④

- ①Series Number.
- ②Category: T-terminal
- ③Material:P-Phosphor bronze
- ④Plating:SN-Bright tin plating

X5080T-PSN	Phosphor bronze	AWG#18-22	TIN Plated	X5080H
PART NO	Material	Wire Range	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 5.08mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X5080T-PSN
APPROVED		SIZE:	A4	DWG NO.: