


## Metal Film Resistors

# Fusible & Flame-Proof Type


## Normal & Miniature Style [ FRM Series ]

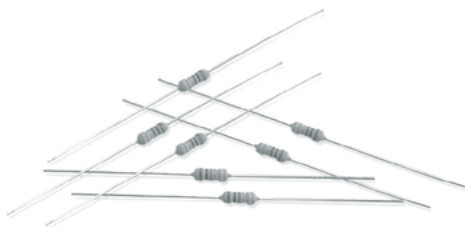

### INTRODUCTION

The FRM Series Metal Film Fusible & Flame-Proof Resistors are manufactured using a vacuum sputtering system to deposit multiple layers of mixed metal alloys and passive materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of gray color lacquer for normal size & pink color lacquer for miniature size. Overload protection without risk of fire. Wide range of overload currents.

### DIMENSIONS




5th color code: white

### FEATURES

|                                        |                        |
|----------------------------------------|------------------------|
| Power Rating                           | 1/4W, 1/2W, 1W, 2W, 3W |
| Resistance Tolerance                   | ±2%, ±5%               |
| T.C.R.                                 | ±200ppm/°C             |
| Flameproof Multi-layer Coating Meets   | UL-94V-0               |
| Flameproof Feature Meets Overload Test | UL-1412                |

### DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.

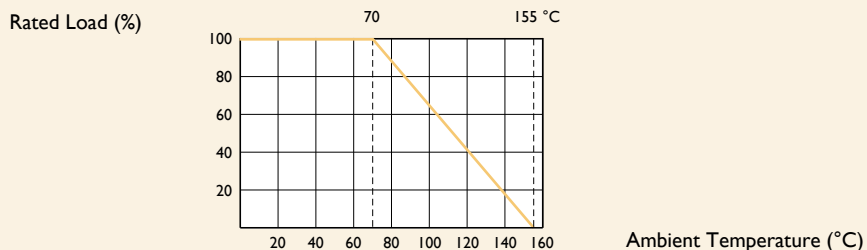

### FUSING CHARACTERISTICS

$0.1 \leq R \leq 1\Omega$  Fusing time within 30 seconds at 36 times of rated power

$1 < R \leq 2.0\Omega$  Fusing time within 30 seconds at 25 times of rated power

$R \geq 2.2\Omega$  Fusing time within 30 seconds at 16 times of rated power

Fusing residual resistive value at least 100 times rated resistance

Unit: mm

| STYLE  |           | DIMENSION |         |        |           |
|--------|-----------|-----------|---------|--------|-----------|
| Normal | Miniature | L         | øD      | H      | ød        |
| FRM-25 | FRM50S    | 6.3±0.5   | 2.4±0.2 | 28±2.0 | 0.55±0.05 |
| FRM-50 | FRM1WS    | 9.0±0.5   | 3.3±0.3 | 26±2.0 | 0.55±0.05 |
| FRM100 | FRM2WS    | 11.5±1.0  | 4.5±0.5 | 35±2.0 | 0.8±0.05  |
| FRM200 | FRM3WS    | 15.5±1.0  | 5.0±0.5 | 33±2.0 | 0.8±0.05  |

Note:

## ELECTRICAL CHARACTERISTICS

| STYLE                       | FRM-25                                                                        | FRM50S | FRM-50 | FRMIWS | FRMI00 | FRM2WS | FRM200 | FRM3WS |
|-----------------------------|-------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|
| Power Rating at 70°C        | 1/4W                                                                          | 1/2W   |        | 1W     |        | 2W     |        | 3W     |
| Maximum Working Voltage     | $\sqrt{P \times R}$                                                           |        |        |        |        |        |        |        |
| Voltage Proof on Insulation | 250V                                                                          |        |        |        | 350V   |        |        |        |
| Resistance Range            | 1Ω - 560Ω (±2%) for E24 series value & 0.1Ω - 560Ω (±5%) for E24 series value |        |        |        |        |        |        |        |
| Operating Temp. Range       | -55°C to +155°C                                                               |        |        |        |        |        |        |        |
| Temperature Coefficient     | ±200ppm/°C                                                                    |        |        |        |        |        |        |        |

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

| PERFORMANCE TEST              | TEST METHOD      |                                                                  | APPRAISE                                  |
|-------------------------------|------------------|------------------------------------------------------------------|-------------------------------------------|
| Short Time Overload           | IEC 60115-1 4.13 | 2.5 times RCWV for 5 Sec.                                        | ±2.0%+0.05Ω                               |
| Voltage Proof on Insulation   | IEC 60115-1 4.7  | in V-block for 60 Sec., test voltage by type                     | By type                                   |
| Temperature Coefficient       | IEC 60115-1 4.8  | -55°C to +155°C                                                  | By type                                   |
| Insulation Resistance         | IEC 60115-1 4.6  | in V-block for 60 Sec.                                           | >100MΩ                                    |
| Solderability                 | IEC 60115-1 4.17 | 235±5°C for 3±0.5 Sec.                                           | 95% Min. coverage                         |
| Solvent Resistance of Marking | IEC 60115-1 4.30 | IPA for 5±0.5 Min. with ultrasonic                               | No deterioration of coatings and markings |
| Robustness of Terminations    | IEC 60115-1 4.16 | Direct load for 10 Sec. in the direction of the terminal leads   | ≥2.5kg (24.5N)                            |
| Periodic-pulse Overload       | IEC 60115-1 4.39 | 4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)              | ±1.0%+0.05Ω                               |
| Damp Heat Steady State        | IEC 60115-1 4.24 | 40±2°C, 90-95% RH for 56 days, loaded with 0.1 times RCWV        | ±5.0%+0.05Ω                               |
| Endurance at 70°C             | IEC 60115-1 4.25 | 70±2°C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)           | ±5.0%+0.05Ω                               |
| Temperature Cycling           | IEC 60115-1 4.19 | -55°C ⇄ Room Temp. ⇄ +155°C ⇄ Room Temp. (5 cycles)              | ±2.0%+0.05Ω                               |
| Resistance to Soldering Heat  | IEC 60115-1 4.18 | 260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body | ±1.0%+0.05Ω                               |
| Accidental Overload Test      | IEC 60115-1 4.26 | 4 times RCWV for 1 Min.                                          | No evidence of flaming or arcing          |

Note: RCWV(Rated Continuous Working Voltage) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage listed above, whichever less.

Revision: 201304



## EXPLANATIONS OF ORDERING CODE

| MFR                                           | -12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | F                                                                                                                                                                                                                      | T                                                                           | F                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 52-                                                                                                                                                                                                                                                                                                   | 100R                                                                                                   |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Code 1 - 3<br><b>Series Name</b><br>See Index | Code 4 - 6<br><b>Power Rating</b><br>-05 = $\varnothing$ d0.5mm<br>-06 = $\varnothing$ d0.6mm<br>-07 = $\varnothing$ d0.7mm<br>-08 = $\varnothing$ d0.8mm<br>-10 = $\varnothing$ d1.0mm<br>-14 = $\varnothing$ d1.4mm<br>-12 = 1/6W<br>-25 = 1/4W<br>25S = 1/4WS<br>-50 = 1/2W<br>50S = 1/2WS<br>100 = 1W<br>1WS = 1WS<br>200 = 2W<br>2WS = 2WS<br>204 = 0.4W<br>207 = 0.6W<br>300 = 3W<br>3WS = 3WS<br>3WM = 3WM<br>400 = 4W<br>500 = 5W<br>5WS = 5WS<br>5SS = 5WSS<br>700 = 7W<br>7WS = 7WS<br>10A = 10W<br>20A = 20W<br>30A = 30W<br>40A = 40W<br>50A = 50W<br>10S = 10WS<br>15A = 15W<br>25A = 25W<br>10B = 100W<br>25B = 250W | Code 7<br><b>Tolerance</b><br>P = $\pm 0.02$ %<br>A = $\pm 0.05$ %<br>B = $\pm 0.1$ %<br>C = $\pm 0.25$ %<br>D = $\pm 0.5$ %<br>F = $\pm 1$ %<br>G = $\pm 2$ %<br>J = $\pm 5$ %<br>K = $\pm 10$ %<br>- = Base on Spec. | Code 8<br><b>Packing Style</b><br>T = Tape/Box<br>R = Tape/Reel<br>B = Bulk | Code 9<br><b>Temperature Coef-<br/>ficient of Resistance</b><br>- = Base on Spec.<br>A = $\pm 5$ ppm/ $^{\circ}$ C<br>B = $\pm 10$ ppm/ $^{\circ}$ C<br>C = $\pm 15$ ppm/ $^{\circ}$ C<br>S = $\pm 20$ ppm/ $^{\circ}$ C<br>D = $\pm 25$ ppm/ $^{\circ}$ C<br>E = $\pm 50$ ppm/ $^{\circ}$ C<br>F = $\pm 100$ ppm/ $^{\circ}$ C<br>G = $\pm 200$ ppm/ $^{\circ}$ C<br>H = $\pm 250$ ppm/ $^{\circ}$ C<br>I = $\pm 300$ ppm/ $^{\circ}$ C<br>J = $\pm 350$ ppm/ $^{\circ}$ C | Code 10 - 12<br><b>Forming Type</b><br>26- = 26mm<br>52- = 52.4mm<br>73- = 73mm<br>81- = 81mm<br>91- = 91mm<br>F = F Type<br>FK = FK Type<br>FKK = FKK Type<br>FFK = F-form Kink<br>M = M-Type Forming<br>MB = M-form W/flat<br>MT = MT Type Forming<br>MR = MR Type<br>AV = AVIsert<br>PN = PANAsert | Code 13 - 17<br><b>Resistance Value</b><br>0R1 = 0.1<br>100R = 100<br>10K = 10,000<br>10M = 10,000,000 |

### EXCEPTION:

#### • Cement series:

<Code 8>: Special packing style code

B: Bulk with wirewound or metal oxide sub-assembly for resistance value

W: Bulk with ceramic based wirewound sub-assembly for resistance value

M: Bulk with metal oxide sub-assembly for resistance value

F: Bulk with Fiberglass based wirewound sub-assembly for resistance value

<Code 10-12>: Without forming code

Example: **SQP500JB-10R**

#### • JPW series:

<Code 13-17>: without resistance value code

Example: **JPW-06-T-52-**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Yageo:

[FRM100JT-73-10R](#) [FRM100JT-73-15R](#) [FRM100JT-73-220R](#) [FRM100JT-73-22R](#) [FRM100JT-73-5K6](#) [FRM100JT-73-6R8](#) [FRM1WSJT-52-1R](#) [FRM1WSJT-52-47R](#) [FRM200JT-73-10R](#) [FRM200JT-73-18R](#) [FRM200JT-73-1K](#) [FRM200JT-73-33R](#) [FRM200JT-73-8R2](#) [FRM-25JR-52-100R](#) [FRM-25JR-52-1K5](#) [FRM-25JT-52-0R47](#) [FRM-25JT-52-100R](#) [FRM-25JT-52-10R](#) [FRM-25JT-52-120R](#) [FRM-25JT-52-15R](#) [FRM-25JT-52-1K5](#) [FRM-25JT-52-1R](#) [FRM-25JT-52-200R](#) [FRM-25JT-52-2R2](#) [FRM-25JT-52-33R](#) [FRM-25JT-52-39R](#) [FRM-25JT-52-4R7](#) [FRM-25JT-52-560R](#) [FRM-25JT-52-5R6](#) [FRM-25JT-52-68R](#) [FRM-25JT-52-9R1](#) [FRM3WSJT-73-0R47](#) [FRM3WSJT-73-2R2](#) [FRM3WSJT-73-33R](#) [FRM3WSJT-73-47R](#) [FRM-50JR-52-1K5](#) [FRM-50JT-52-0R22](#) [FRM-50JT-52-0R33](#) [FRM-50JT-52-0R47](#) [FRM-50JT-52-100R](#) [FRM-50JT-52-10R](#) [FRM-50JT-52-1R](#) [FRM-50JT-52-20R](#) [FRM-50JT-52-2R2](#) [FRM-50JT-52-3R3](#) [FRM-50JT-52-47R](#) [FRM50SJR-52-12K](#) [FRM50SJT-52-100R](#) [FRM50SJT-52-10R](#) [FRM50SJT-52-220R](#) [FRM50SJT-52-2R2](#) [FRM50SJT-52-36R](#) [FRM50SJT-52-3R9](#) [FRM50SJT-52-470R](#) [FRM50SJT-52-47R](#) [FRM50SJT-52-4R7](#) [FRM50SJT-52-68R](#)