




Connectors > PCB Connectors > PCB Headers & Receptacles

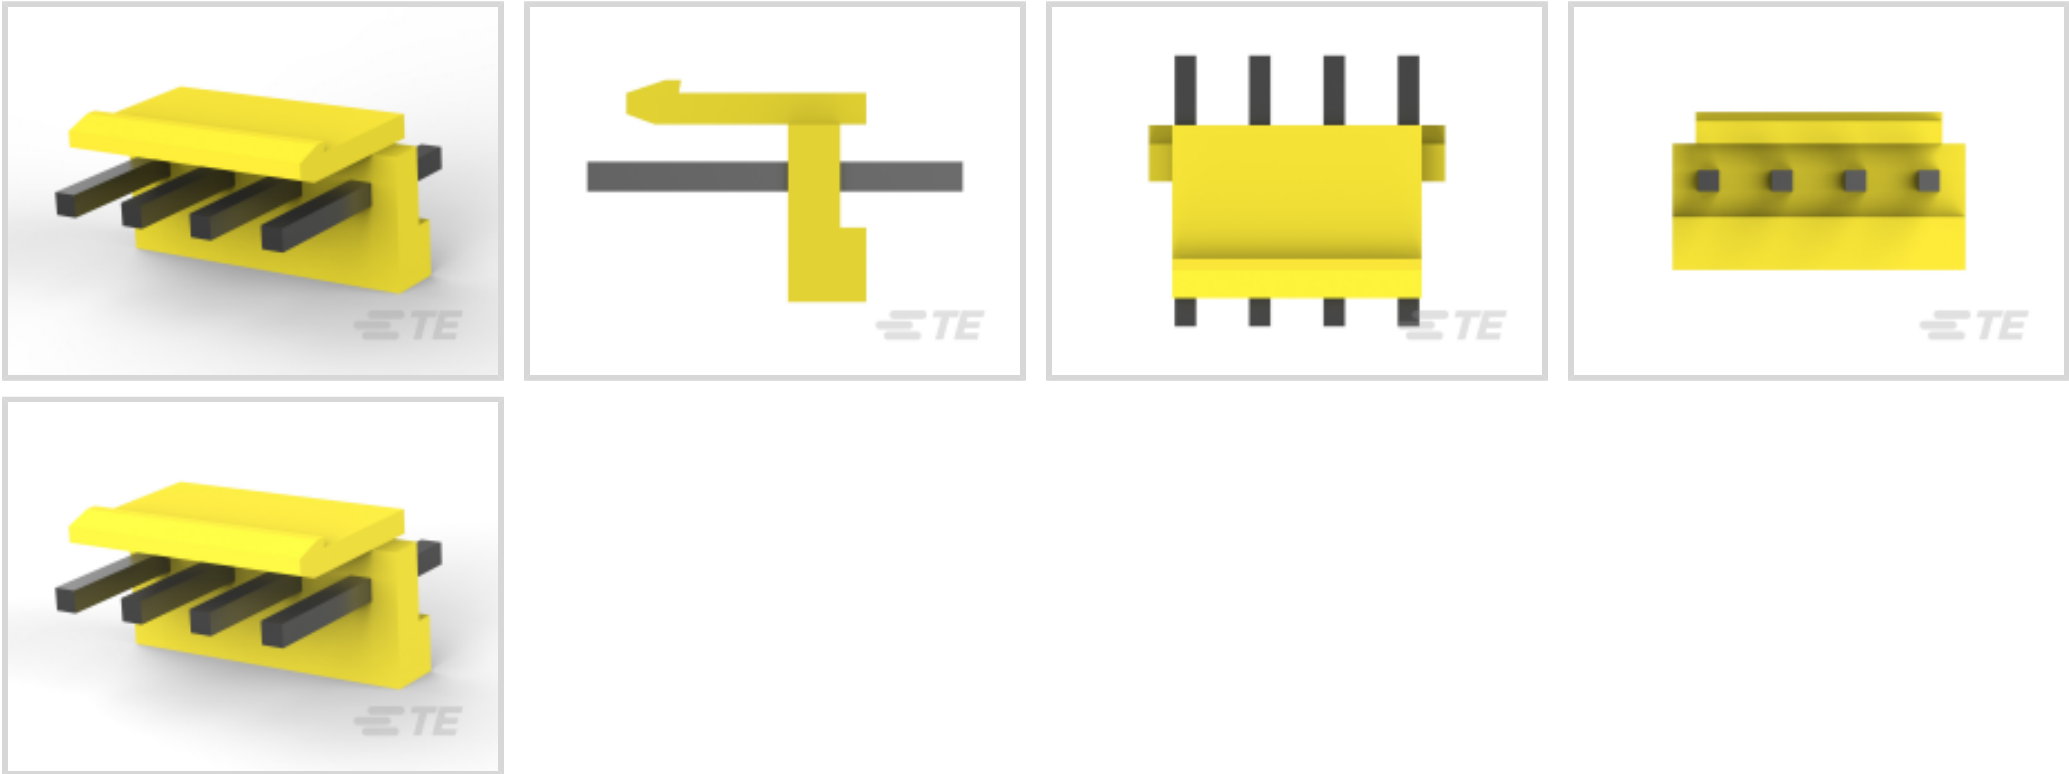

Connector System: **Wire-to-Board**

Number of Positions: **4**

Number of Rows: **1**

Centerline (Pitch): **3.96 mm [.156 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Power Positions	4
Number of Loaded Positions	4
Number of Positions	4
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Connector Profile	Low
Primary Product Color	Yellow

Contact Features

Contact Mating Area Length	7.7 mm[.303 in]
Contact Size	1.14mm
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.8 – 1.8 µm[31.5 – 70.86 µin]
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Contact Shape & Form	Square
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	3.96 mm[.156 in]



Dimensions

Connector Length	15.78 mm[.621 in]
Connector Height	9.2 mm[.36 in]
Connector Width	8.5 mm[.334 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Rating	Recognized
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	2500
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent




chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 1-1123722-4 3.96 EP PLUG HSG 4P(NATURAL)	 TE Part # 2-1123722-4 3.96 EP PLUG HSG 4P(YELLOW)	 TE Part # 1123721-2 ECONOMY POWER CONN REC CONT	 TE Part # 1744494-4 04P EP-II HOUSING, YELLOW CONT
 TE Part # 2316952-4 3.96 EP HDR ASSY 4P, NO PIN 2,3	 TE Part # 1744416-4 4 POS EP II HSG, GLOW WIRE	 TE Part # 1123721-1 EP CONN. REC CONTACT	 TE Part # 1744104-2 3.96 EPHDR ASSY 4P OMIT #2 PIN

Also in the Series | Economy Power

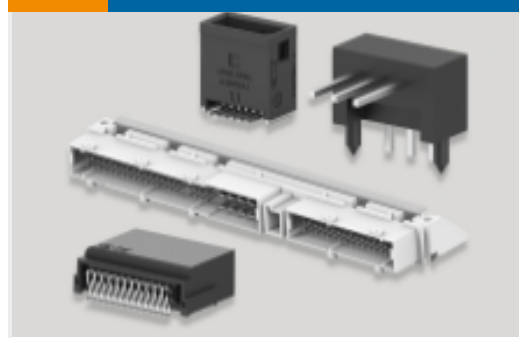 Connector Contacts(15)	 Connector Hardware(2)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(400)
 Rectangular Connector Housings(1)	 Rectangular Power Connectors(64)	 Wire-to-Board Connector Assemblies & Housings(142)	



Customers Also Bought




TE Part #1775470-4
HPI CONN., 2.0MM, V/T, SMT, 4P, 80U"




TE Part #1534073-3
MULTIFIT MK2 ASSY3P




TE Part #4-1123724-2
3.96EP HDR ASSY 2(3)P RED



TE Part #4-440052-5
2.5MM,HDR,5POS,VERTICAL, CONNECTOR



TE Part #2-1740533-2
AMP DUOPLUG POW CONNECTOR




TE Part #1-1877285-7
07P EP SHRD HDR ASMY, WHITE,NO PIN 6



TE Part #2-1971845-4
4P, RAST 5 Tab Header, THV



TE Part #2-2322950-5
5P, RAST 5 TAB HEADER SELEC, THV, OPP



TE Part #2309279-5
05P EP SHRD HDR ASY,NO 2 PIN, WHITE

Documents

Product Drawings
3.96 EP HDR ASSY 4P(YELLOW)

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1123723-4_AD_c-2-1123723-4-ad.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1123723-4_AD_c-2-1123723-4-ad.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1123723-4_AD_c-2-1123723-4-ad.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages
1-1773885-9 Economy Power Connectors
English

Product Specifications
Application Specification
Japanese
Application Specification
English
Application Specification
English

Instruction Sheets
Instruction Sheet (non U.S.)
Japanese
Economy Power (EP) Connector
Japanese

Agency Approvals
VDE Certificate
English