

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作






由Autodesk教育版产品制作

RoHS

MAPX

MODIFICATION

DATE

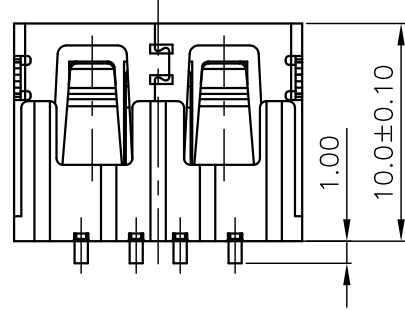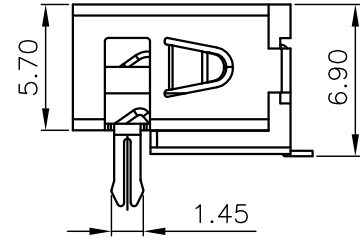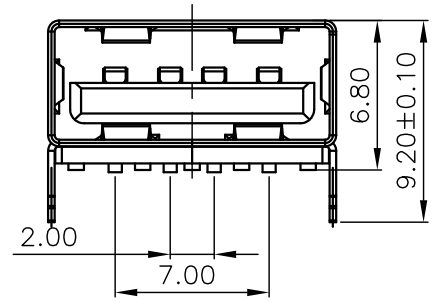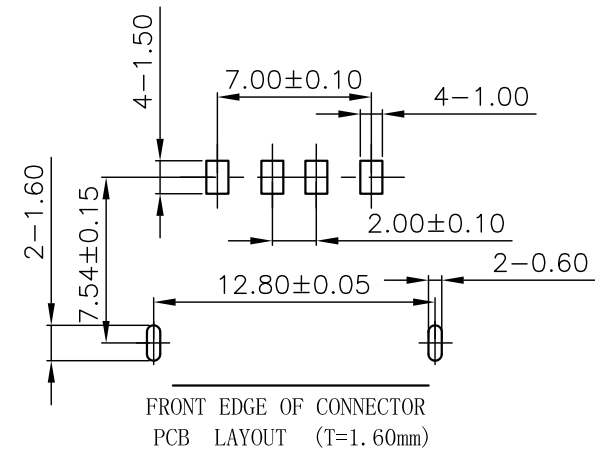

Note:

- 1.Material:
 - 1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
 - 1.2,Contact: copper alloy,t=0.25mm
 - 1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
- 2.Specification:
 - 2.1,Current rating:1.5A Max.
 - 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3,Contact resistance: 30 mΩ Max.
 - 2.4,Insulation resistance: 100 MΩ Min.
 - 2.5,Total mating force: 3.57 Kgf Max.
 - 2.6,Total unmating force: 1.0 Kgf Min.
- 3.Finish:
 - 3.1,Contact: Plated Golt in Mating Area: Tin On Solder Tails
 - Shell: Nickel Plating
- 4.Environmental:
 - 4.1,Temperature range: -55°C~85°C

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表				单位	MM	制图	Z-Y-B	制图料号	910-161B2028S10100
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X.	±0.35	X.	±5.°	比例	1:1	审核	郭治富	产品名称	AF10.0C款前两脚无边铁壳反向LCP
.X	±0.20	.X	±2.°	SCALE		核		PRODUCT_NO.	黑胶6.8SMT
.XX	±0.10	.XX	±1.°	日期	2016-09-09	核准	黄国荣	角法	角法
.XXX	±0.05	.XXX	±0.5°	DATE		APPD		VIEW	角法
								版本	A0
								VER	