

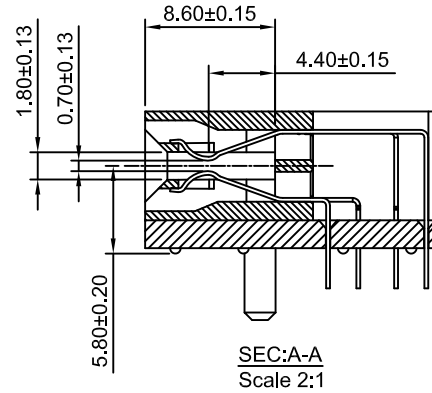
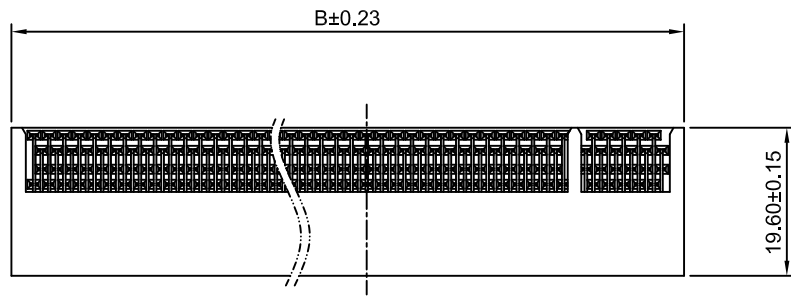


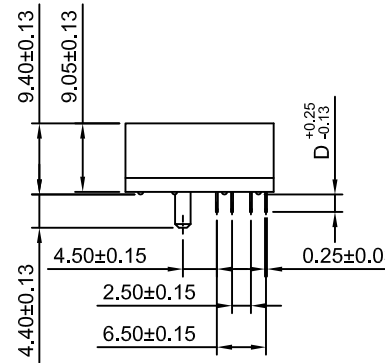

Ordering Information:
PCIE-1001WRB-F-XXXP - $\frac{**}{2}$ - $\frac{**}{3}$



- Part No.
- Finish:
(Blank): Gold over Nickel
G15: Gold over Nickel(Au:15u")
G30: Gold over Nickel(Au:30u")
- Size D:
(Blank): 2.30mm
D31: 3.10mm
D36: 3.56mm

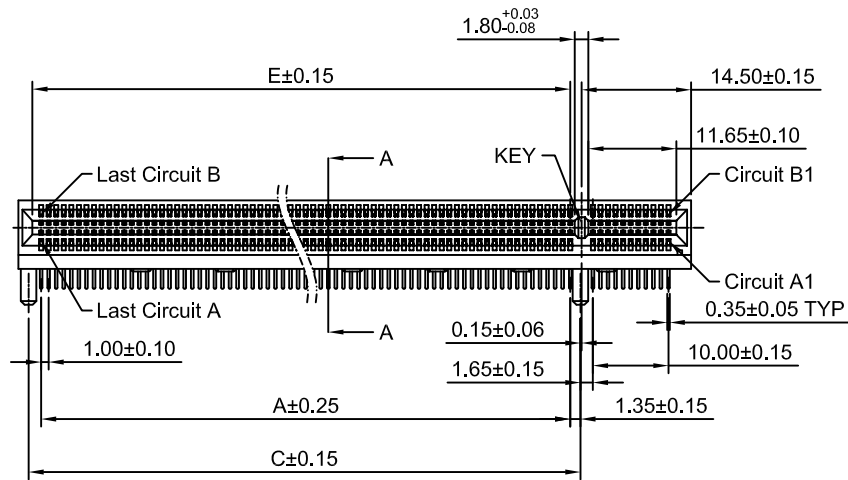

SPECIFICATIONS:
Current rating: 1.1A AC,DC
Voltage rating: 50V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 40mΩ Max.
Insulation resistance: 100MΩ Min.
Withstanding voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold over Nickel
Insulation: Nylon 9T + 30%GF,UL94V-0(Black)
Tine Plate: LCP + 30%GF,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			
	A	B	C	E
36P	6.00	25.00	9.15	7.65
64P	20.00	39.00	23.15	21.65
98P	37.00	56.00	40.15	38.65
164P	70.00	89.00	73.15	71.65

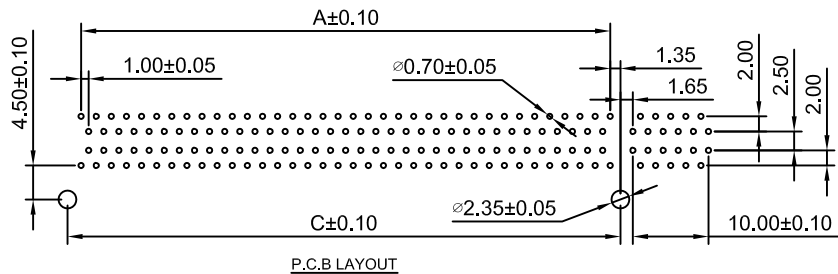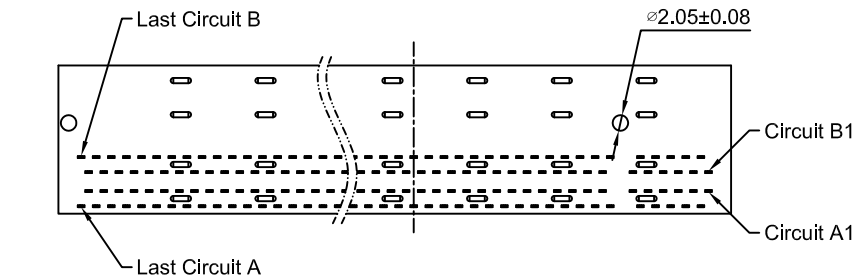

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title :	
mm	1:1	1 of 1		
Draw By:		Approved :	PCI Express Card Edge Connector Assembly Right Angle, 5.80mm Slot Height Through Hole, ExpressModule Type	
Diankui Wan		Jack Yin		
General Tolerance				
PROJECT				
x.x±0.25 x.xxx±0.20 x.xxx±0.15			DRAW NO : PCIE-1001WRB-F-XXXP	
			REV A1	

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	