1-2394071-2 ACTIVE

PowerTube | PowerTube HVP-HD 1000

TE Internal #: 1-2394071-2

Bus Bar-to-Wire, 2 Position, 36 mm [1.417 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power,

PowerTube HVP-HD 1000

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > HVP HD1000 90 deg











Connector System: Bus Bar-to-Wire

Number of Positions: 2

Number of Rows: 1

Centerline (Pitch): 36 mm [1.417 in]

Termination Method to PCB: Through Hole - Screw

All HVP HD1000 90 deg (90)

Features

Product Type Features

Connector Shape	Circular
Connector System	Bus Bar-to-Wire
Header Type	Fully Shrouded
Sealable	Yes
Connector & Contact Terminates To	Bus Bar

Configuration Features

Number of Positions	2	
Number of Rows	1	

Electrical Characteristics

Nominal Voltage Architecture	1000 V
Operating Voltage	1000 VAC

Body Features



Connector & Keying Code	C/D
Primary Product Color	Blue, Purple
Contact Features	
Mating Pin Diameter	10 mm[.393 in]
Contact Mating Area Plating Material	Silver (Ag)
Contact Type	Pin
Termination Features	
Termination Method to PCB	Through Hole - Screw
Mechanical Attachment	
Mating Alignment Type	Polarization
Connector Mounting Type	Panel Mount
Mating Alignment	With
PCB Mount Retention	Without
Housing Features	
Centerline (Pitch)	36 mm[1.417 in]
Usage Conditions	
Operating Temperature (Max)	140 °C[284 °F]
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	IP6K9K
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Container

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2024

(241)

Candidate List Declared Against: JUNE

2024 (241)

SVHC > Threshold:

Octamethylcyclotetrasiloxane (D4) (10% in

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic

Halogen Content

Not Yet Reviewed for halogen content

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts





Also in the Series | PowerTube HVP-HD 1000







Automotive Housings(24)




Automotive Terminals(6)



09/14/2024 06:24PM | Page 3



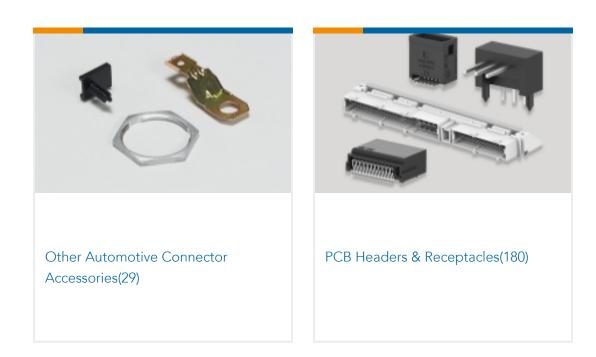

Customers Also Bought











Documents

Product Drawings
2POS,HVP1000,ASSY,90DEG,COD C/D

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2394071-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2394071-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2394071-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Bus Bar-to-Wire, 2 Position, 36 mm [1.417 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1000



Datasheets & Catalog Pages

HIVONEX CONNECTORS & CHARGING SOLUTIONS

English

Product Specifications

Application Specification

English