

2905273

https://www.phoenixcontact.com/us/products/2905273

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

16-channel module for Honeywell C300 digital cards with disconnect, test points, socketed 1A fuses and fuse status indicator.



Your advantages

- These VARIOFACE modules are used in combination with the relevant front adapters
- · UM-PRO housing
- · Per channel disconnects with test points
- · LED blown fusing indication
- · Per channel shield connection
- · Per channel pluggable 1 A fusing
- · DIN rail mounting, includes grounding foot
- · Digital module includes shield connection

Commercial data

Item number	2905273
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C421
Product key	CK218H
GTIN	4046356947107
Weight per piece (including packing)	475.2 g
Weight per piece (excluding packing)	468.8 g
Customs tariff number	85371098
Country of origin	US



2905273

https://www.phoenixcontact.com/us/products/2905273

Technical data

Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	37
No. of channels	16
Data management status	
Article revision	01

Electrical properties

Nominal voltage U _N	24 V DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	4 A (via D-SUB)
Supported controller HONEYWELL Experion PKS C300/C-Series	
Suitable I/O card	TDII 01

TDIL11

Connection data

Field level

Connection method	Screw connection with disconnect knife
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section AWG	24 12

Controller level

Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

Signaling

Status display	no
Status display present	Yes, if the fuse fails

Dimensions

Item dimensions

Width	104 mm
Height	142.3 mm
Depth	79 mm



2905273

https://www.phoenixcontact.com/us/products/2905273

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C 60 °C
Ambient temperature (storage/transport)	-40 °C 75 °C

Standards and regulations

Mounting

Mounting type	DIN rail mounting
Thread type	()
Assembly note	in rows with zero spacing
Mounting position	any

Notes


Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.



2905273

https://www.phoenixcontact.com/us/products/2905273

Drawings

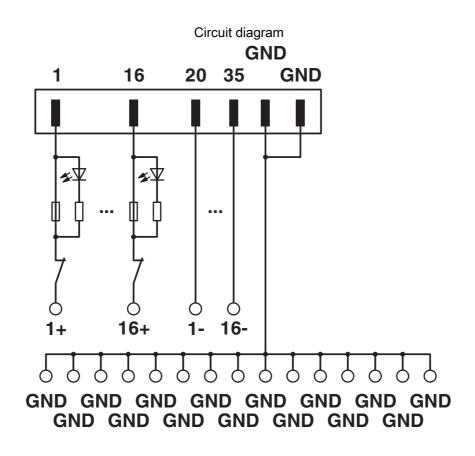



2905273

https://www.phoenixcontact.com/us/products/2905273

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2905273



cUL RecognizedApproval ID: E238705



UL RecognizedApproval ID: E238705

cULus Recognized



2905273

https://www.phoenixcontact.com/us/products/2905273

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152
ETIM	
ETIM 9.0	EC002780
UNSPSC	

39121400



2905273

https://www.phoenixcontact.com/us/products/2905273

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	cbd26852-cc5f-4218-926d-4beb1c6e08e7

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com