

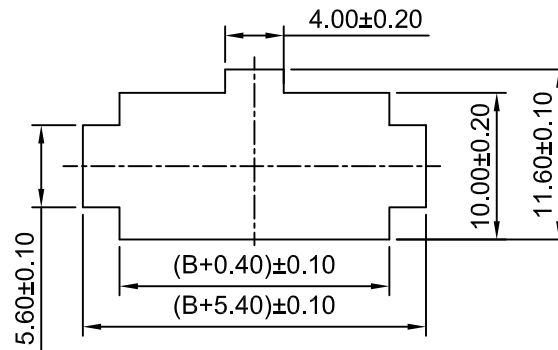
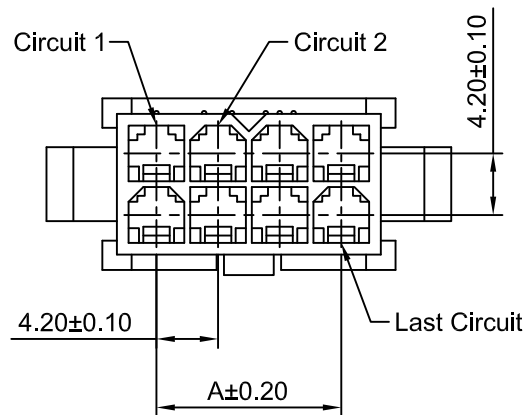


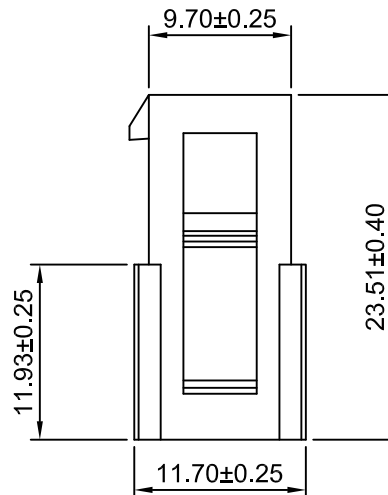

RECOMMENDED PANEL CUT-OUT
(DESIGNED FOR 0.80mm TO 2.00mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)

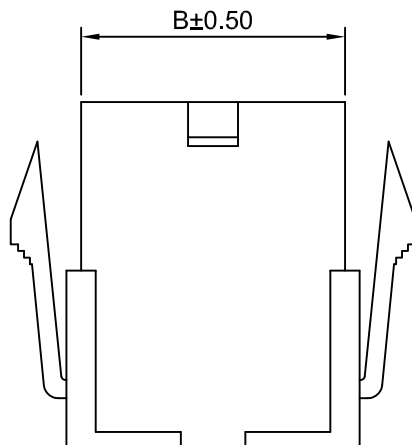

Ordering Information:

C4201HM-2xXP - *** - ** - ***

1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2

V0: Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank):Natural

BK:Black BL:Blue


RD:Red YL:Yellow

GN:Green

4.Logo & Marking:

(Blank): Without LOGO

CJT: With LOGO



SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201M-TCA-HH series Voltage

Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.20mm PITCH DUAL ROW HOUSING	
mm		2:1		1 of 1			
DRAWN		CHK'D		APPR'D			
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION			DRAWING NO.	
x.xx±0.25						C4201HM-2xXP	
x.xx±0.20							
x.xxx±0.15							
ANGLES ±1°						REV A4	

REV	DESCRIPTION	DATE
A4	JL-GC-ECN00353	2024.09.03
A3	CHANGE THE SIZE & INFORMATION	2019.12.14
A2	MODIFY THE SIZE	2015.05.09
A1	CHANGE TOLERANCE	2014.07.25
A0	NEW RELEASE	2005.05.10