




Connectors > PCB Connectors > PCB Headers & Receptacles

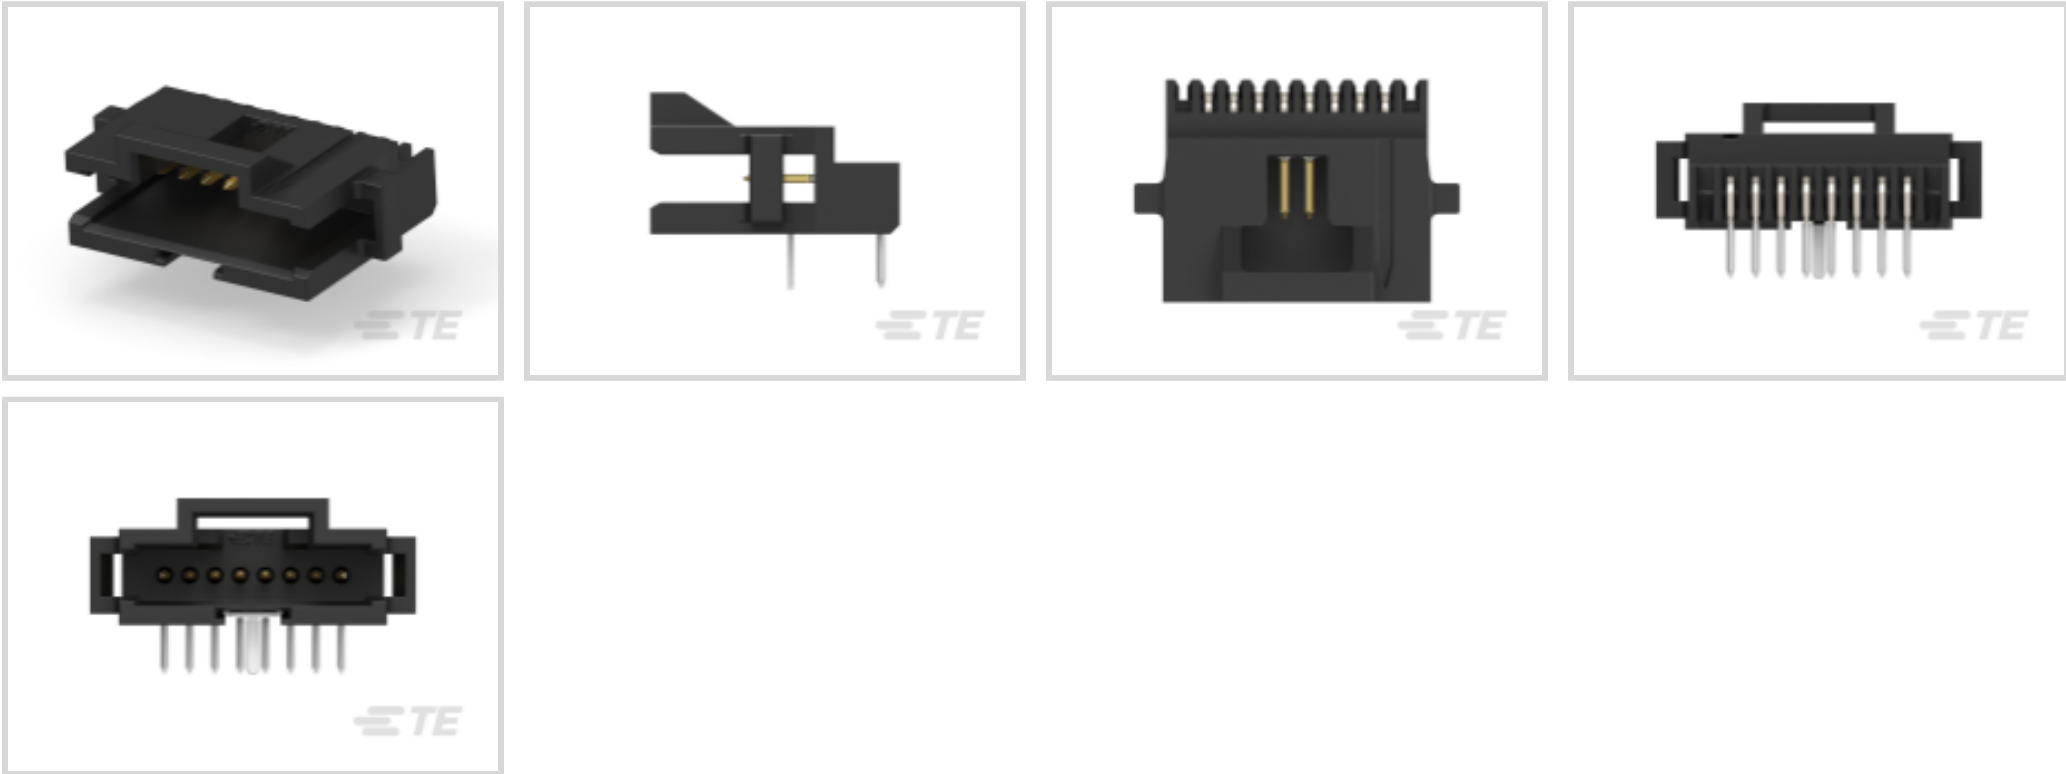

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **8**

Number of Rows: **1**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type       | PCB Mount Header      |
| Connector System                  | Board-to-Board        |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                                  |               |
|----------------------------------|---------------|
| Connector Contact Load Condition | Fully Loaded  |
| PCB Mount Orientation            | Right Angle   |
| Number of Positions              | 8             |
| Number of Rows                   | 1             |
| Board-to-Board Configuration     | Perpendicular |

Electrical Characteristics

|                                       |         |
|---------------------------------------|---------|
| Dielectric Withstanding Voltage (Max) | 500 VAC |
| Insulation Resistance                 | 5000 MΩ |



|                   |        |
|-------------------|--------|
| Operating Voltage | 30 VAC |
|-------------------|--------|

Body Features

|  |                      |
|--|----------------------|
| PCB Retention Feature Plating Material | Tin-Lead over Nickel |
| Connector Profile                      | Standard             |
| Primary Product Color                  | Black                |

Contact Features

|   |                               |
|---|-------------------------------|
| Mating Square Post Dimension                            | .38 mm[.015 in]               |
| PCB Contact Termination Area Plating Material Thickness | 3.81 – 6.35 µm[150 – 250 µin] |
| PCB Contact Termination Area Plating Material Finish    | Matte                         |
| Contact Shape & Form                                    | Rectangular                   |
| Contact Underplating Material                           | Nickel                        |
| PCB Contact Termination Area Plating Material           | Tin-Lead                      |
| Contact Base Material                                   | Copper Alloy                  |
| Contact Mating Area Plating Material                    | Gold                          |
| Contact Mating Area Plating Material Thickness          | .76 µm[30 µin]                |
| Contact Type  | Pin                           |
| Contact Current Rating (Max)                            | 3.6 A                         |

Termination Features

|                                  |                       |
|----------------------------------|-----------------------|
| Termination Post & Tail Diameter | .38 mm[.015 in]       |
| Termination Post & Tail Length   | 2.54 mm[.1 in]        |
| Termination Method to PCB        | Through Hole - Solder |

Mechanical Attachment

|                          |                |
|--------------------------|----------------|
| Mating Retention         | With           |
| PCB Mount Retention Type | Hold-Down Post |
| Mating Retention Type    | Latching       |
| Mating Alignment         | With           |
| Mating Alignment Type    | Polarization   |
| PCB Mount Retention      | With           |
| PCB Mount Alignment      | Without        |
| Connector Mounting Type  | Board Mount    |

Housing Features

|                    |                 |
|--------------------|-----------------|
| Centerline (Pitch) | 1.27 mm[.05 in] |
|--------------------|-----------------|



|                  |     |
|------------------|-----|
| Housing Material | LCP |
|------------------|-----|

Dimensions

|                             |                  |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
|-----------------------------|------------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Housing Temperature Rating  | High                       |
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |

Operation/Application

|                        |                |
|------------------------|----------------|
| Solder Process Feature | Board Standoff |
| Circuit Application    | Signal         |

Industry Standards

|   |                       |
|---|-----------------------|
| UL Rating                                   | Recognized            |
| Compatible With Agency/Standards Products   | CSA, UL               |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating                      | UL 94V-0              |

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 31        |
| Packaging Method   | Box, Tube |

Other

|                            |   |
|----------------------------|---|
| Position Locations Omitted | 0 |
|----------------------------|---|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Not Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>SVHC > Threshold:<br>Pb (13% in Component Part)<br><b>Article Safe Usage Statements:</b><br>Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC  |



Free

Solder Process Capability

Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-F439-R2435127  
FFC Receptacle Housing: 1.27mm

TE Part # 104192-1  
08 SYSTEM 50 SRST RCPT ASSY

Also in the Series | AMPMODU System 50

PCB Headers & Receptacles(990)

Customers Also Bought

TE Part #5120603-1  
1FHR,64,30A/S,S,N,S11,12

TE Part #6-103673-1  
12 MTE HDR SRRA LATCH W/HLDWN

TE Part #826953-5  
5P MOD2 STIFT LEI

TE Part #9-2176401-1  
3540 47R 5%



TE Part #650983-5  
064 EURO TYPE C RECEPT BL ASSY

TE Part #1-2364572-6  
AVH19 FLT SS LK R+P GRN 24V16A

TE Part #1-1903328-4  
DYNAMIC 4200S HDR ASSY H 4P X

TE Part #2803-4-0000  
CONT SOC ASSY

TE Part #104074-1  
10 SYSTEM 50 HDR SRRA SHRD

TE Part #6-2176616-0  
SMQW2W 30R 5%

Documents

Product Drawings

08 SYSTEM 50 HDR SRRA SHRD

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-104074-0\_W.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-104074-0\_W.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-104074-0\_W.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English