
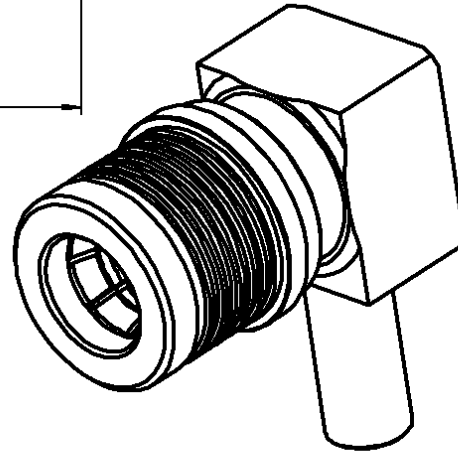



RIGHT ANGLE PLUG CRIMP TYPE

CABLE 2.6/50 S

R123.172.000

Series : QMA

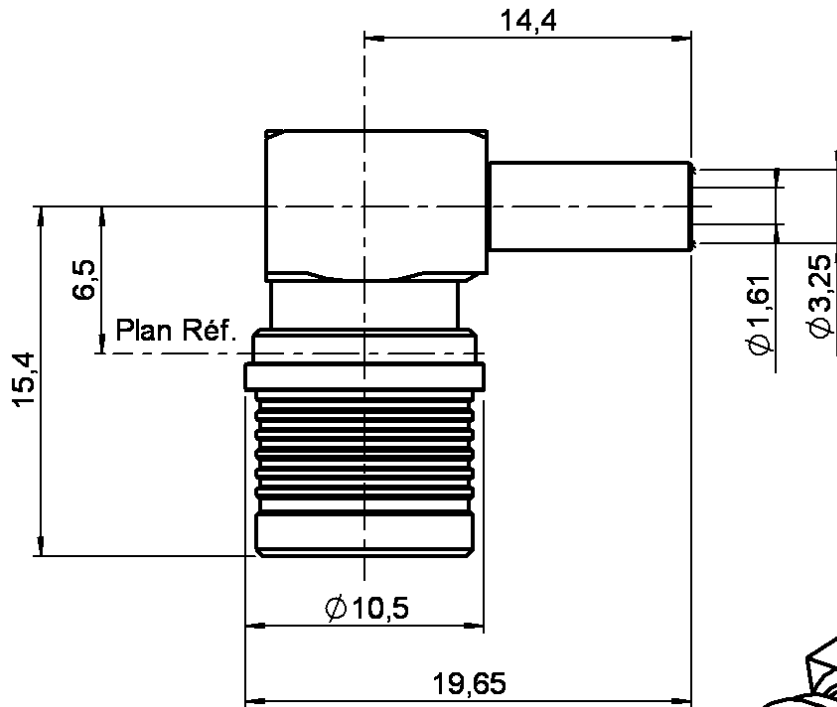

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	BBR 2
CENTER CONTACT	BRASS	GOLD 1.3 OVER COPPER 2.5
OUTER CONTACT	BRONZE	BBR 2
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0114 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RIGHT ANGLE PLUG CRIMP TYPE

CABLE 2.6/50 S

R123.172.000

Series : QMA

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.15 + 0.030	x F(GHz) Maxi
Insertion loss	.05	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (***80	- F(GHz)) dB Maxi
Voltage rating	250	Veff Maxi
Dielectric withstanding voltage	750	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	18 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm

Mating life	100 Cycles mini
Weight	7.940 g

ENVIRONMENTAL

Operating temperature	-40/+80 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATIONCABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	2.00	7.00	13.0	0.00	11.0	0.00

Assembly instruction : **Crimp 05**

Recommended cable(s)

RG 188

RG 316

KX 22A

Cable retention

- pull off

90 N mini

- torque

NA N.cmTOOLING

Part Number	Description	Hexagon
.	.	.
R282.211.000	CRIMPING TOOL	3.25
R282.235.003	CRIMPING DIES	3.25
R282.293.000	CRIMPING TOOL	

OTHERS CHARACTERISTICS

**Intermod. : <-120dBc at 1.8GHz (2x20W)

***RF leakage(interface) 3<F<6GHz:<-70dB

Issue : 0114 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

