
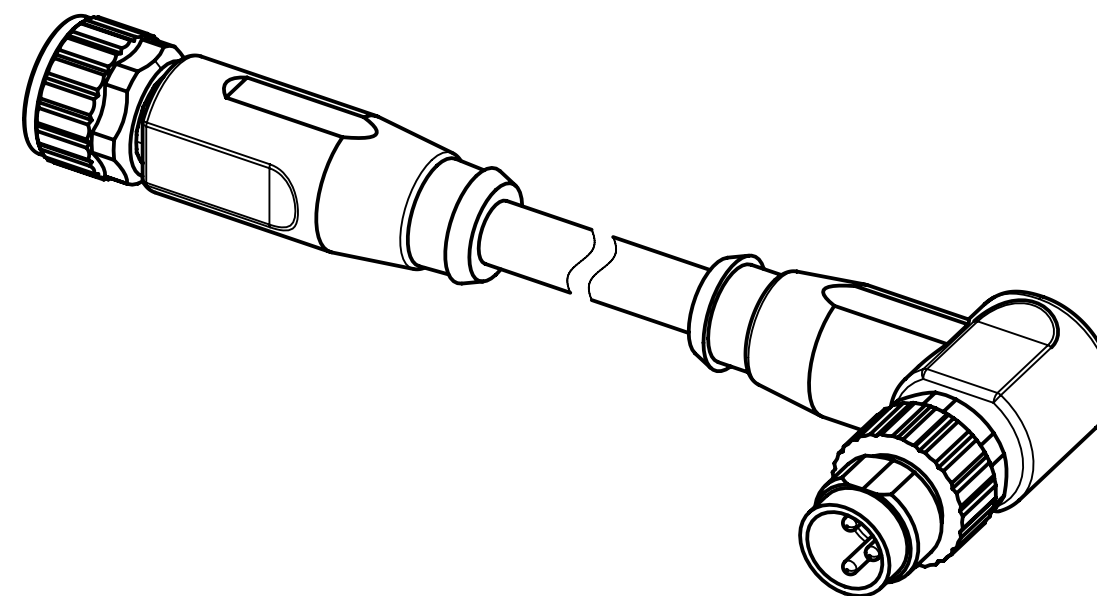


Connector Location A


Connector Location B

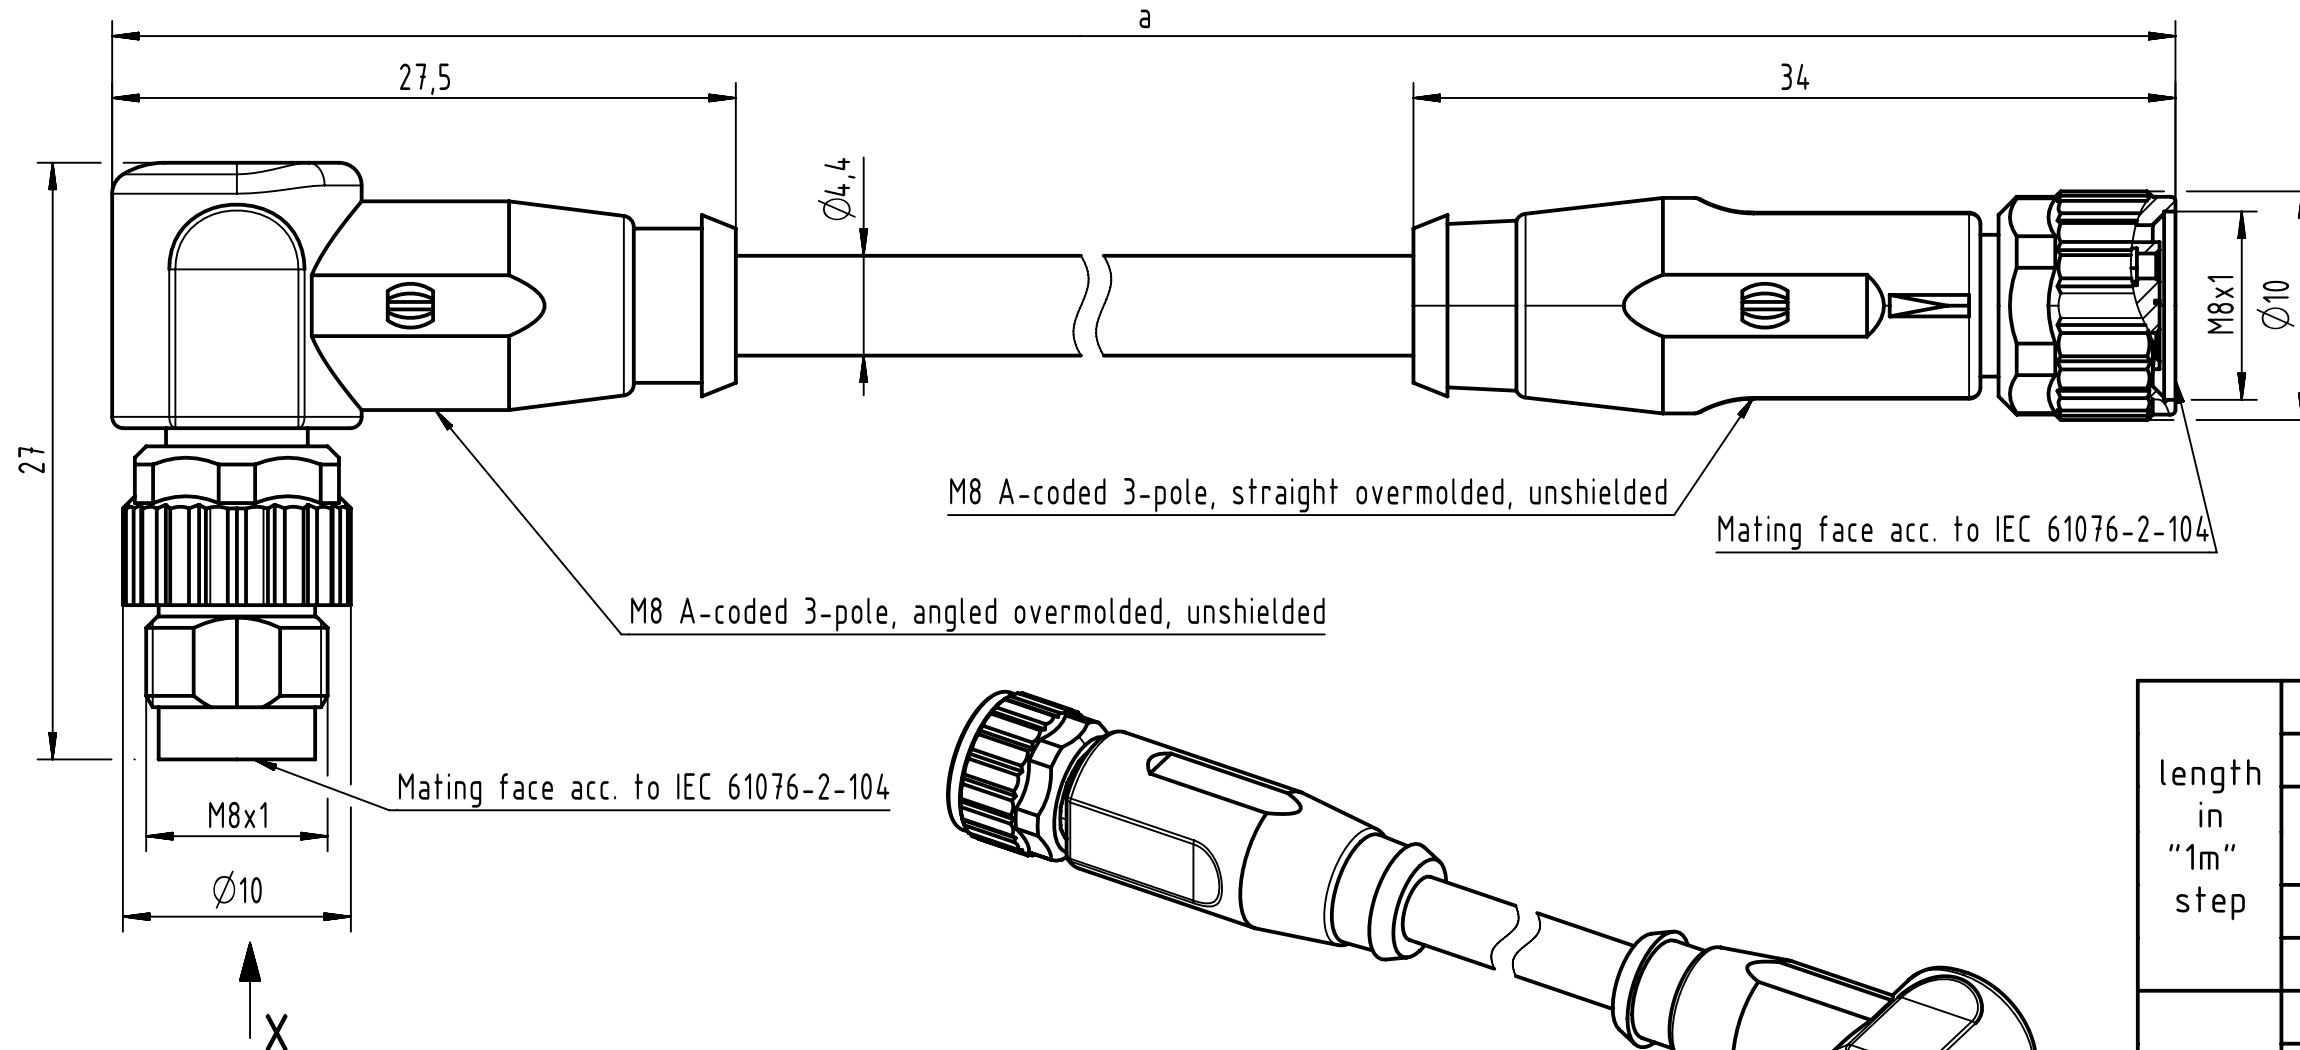


X
male

Y
female

Loading Plan

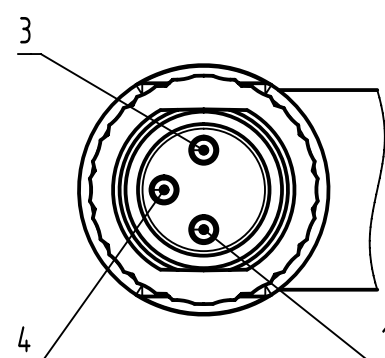

- 1 brown 1
- 3 blue 3
- 4 black 4

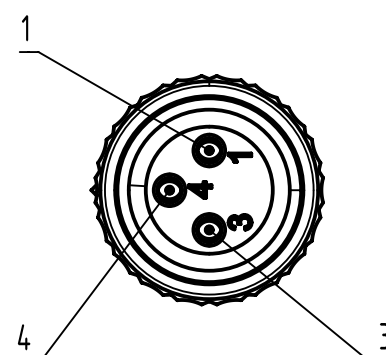

- Protection level: IP67
- Temperature range: -30°C ... +80°C

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

PUR black, 3x0.25mm ²	21348281388XXX
Type of cable	Part no.

All rights reserved Department HCS - RO		Tech. Character. Created by BANIUD Banciu		Free size tol. Inspected by COSTEA Costea		According to production drawing Standardisation MUNTEANV Muntean		Date 2021-03-18 State Final Release	
HARTING Customised Solutions D-32339 Espelkamp		Title M8 3-pol an/st m/f PUR		Doc-Key / ECM-Nr. 100944427/UGD/000/A 500000191223		Rev. A		Page 1/1	
		Type TB		Number 21348281388XXX					