
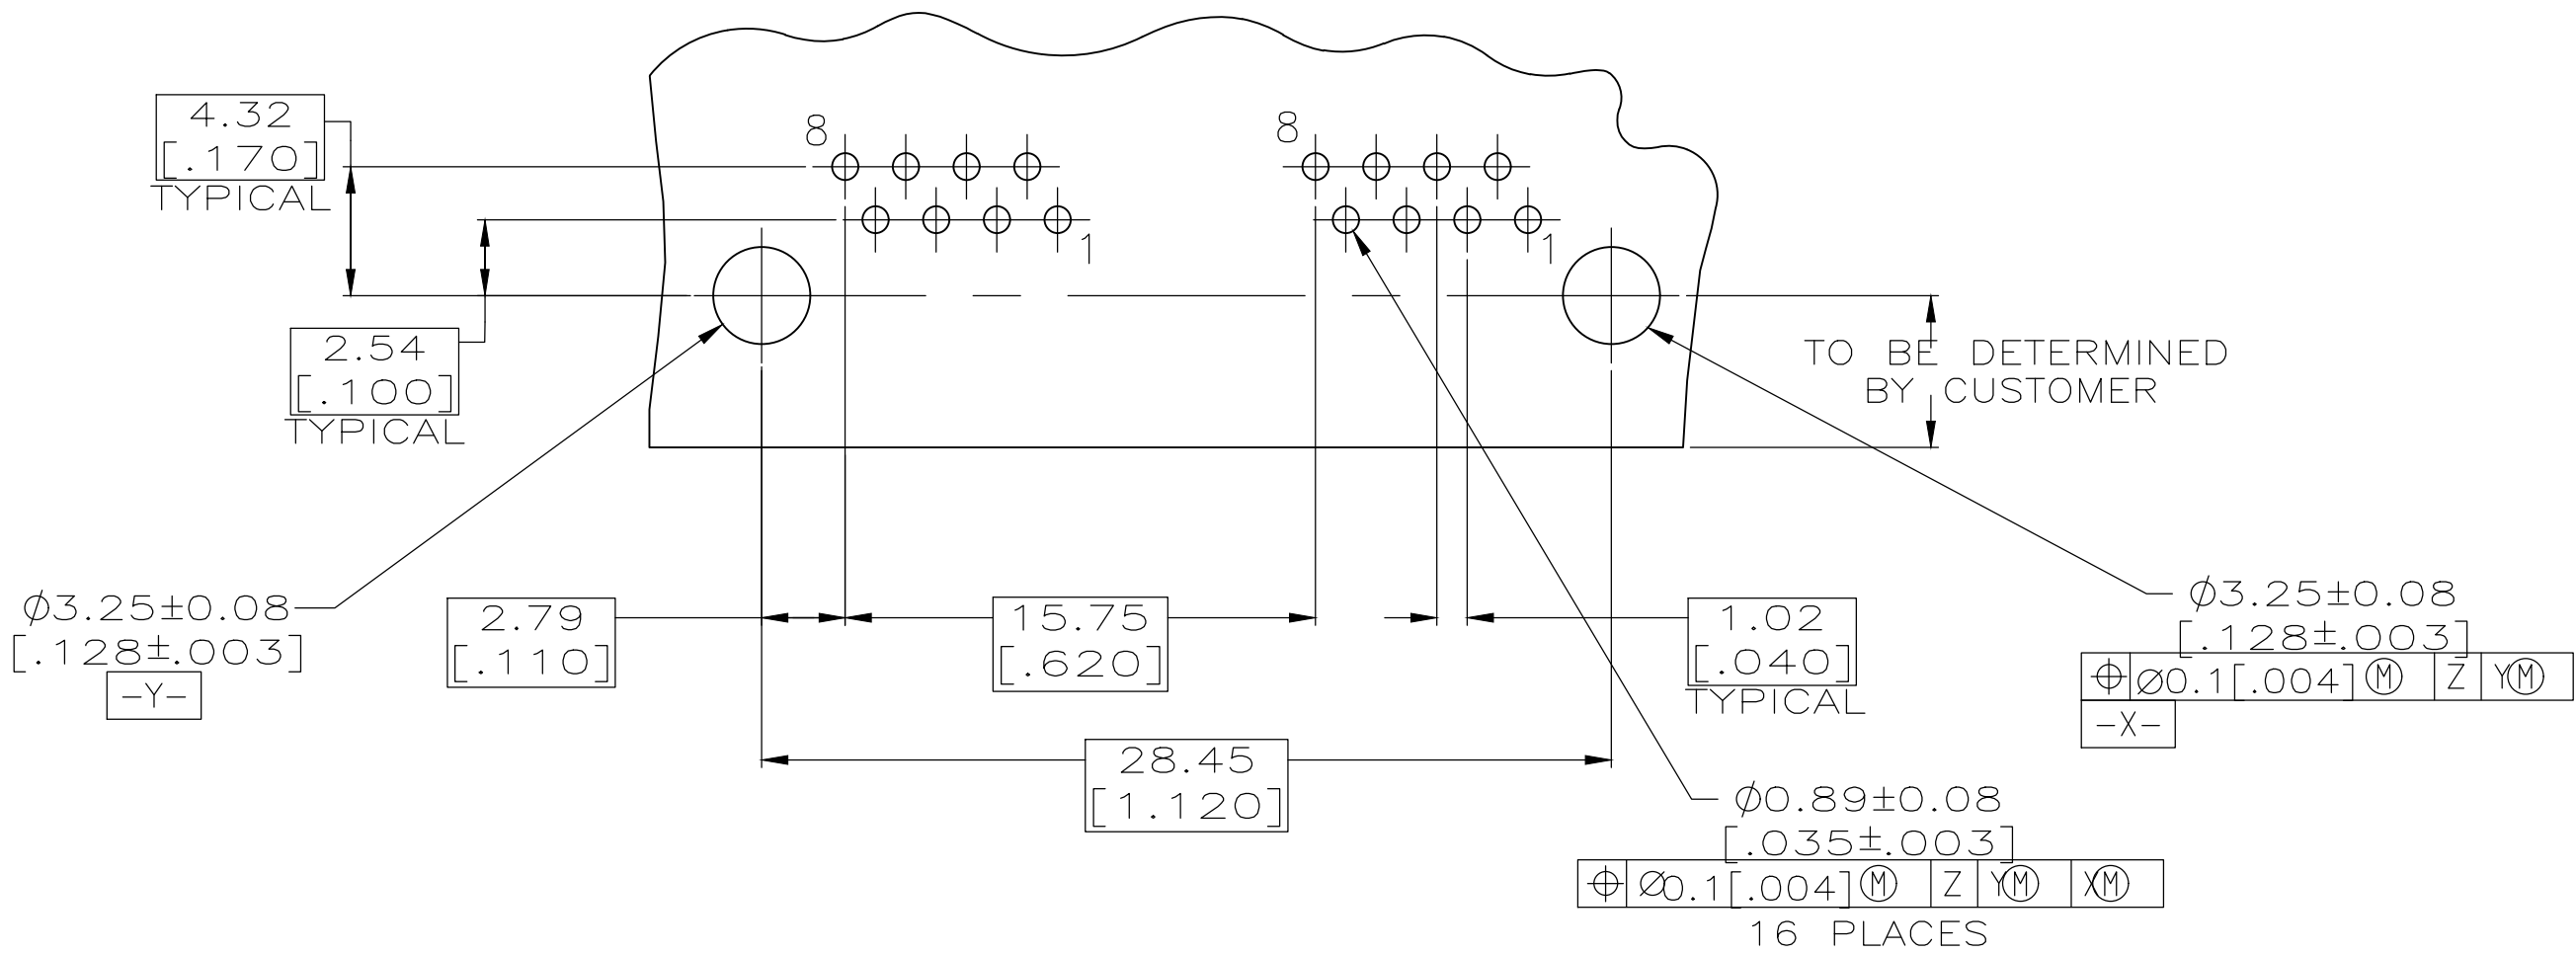



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECO-18-014918	19AUG2019	RR	SH

- ⚠ MATERIAL:
HOUSING – HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94V-0; IR REFLOW SOLDERING PROCESS COMPATIBLE.
TERMINALS – .36[.014] THICK PHOS BRONZE PLATED WITH 3.81μm[.000150] MINIMUM THICK BRIGHT TIN LEAD IN SOLDER AREA. 1.27μm [.000050] MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27μm [.000050] MINIMUM THICK NICKEL.
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIIONS PART 68, SUBPART F.
- ⚠ SUGGESTED PANEL OPENING DIMENSIONS.
- ⚠ SUGGESTED CLEARANCE BETWEEN BOTTOM OF CONNECTOR AND BOTTOM PANEL OPENING.

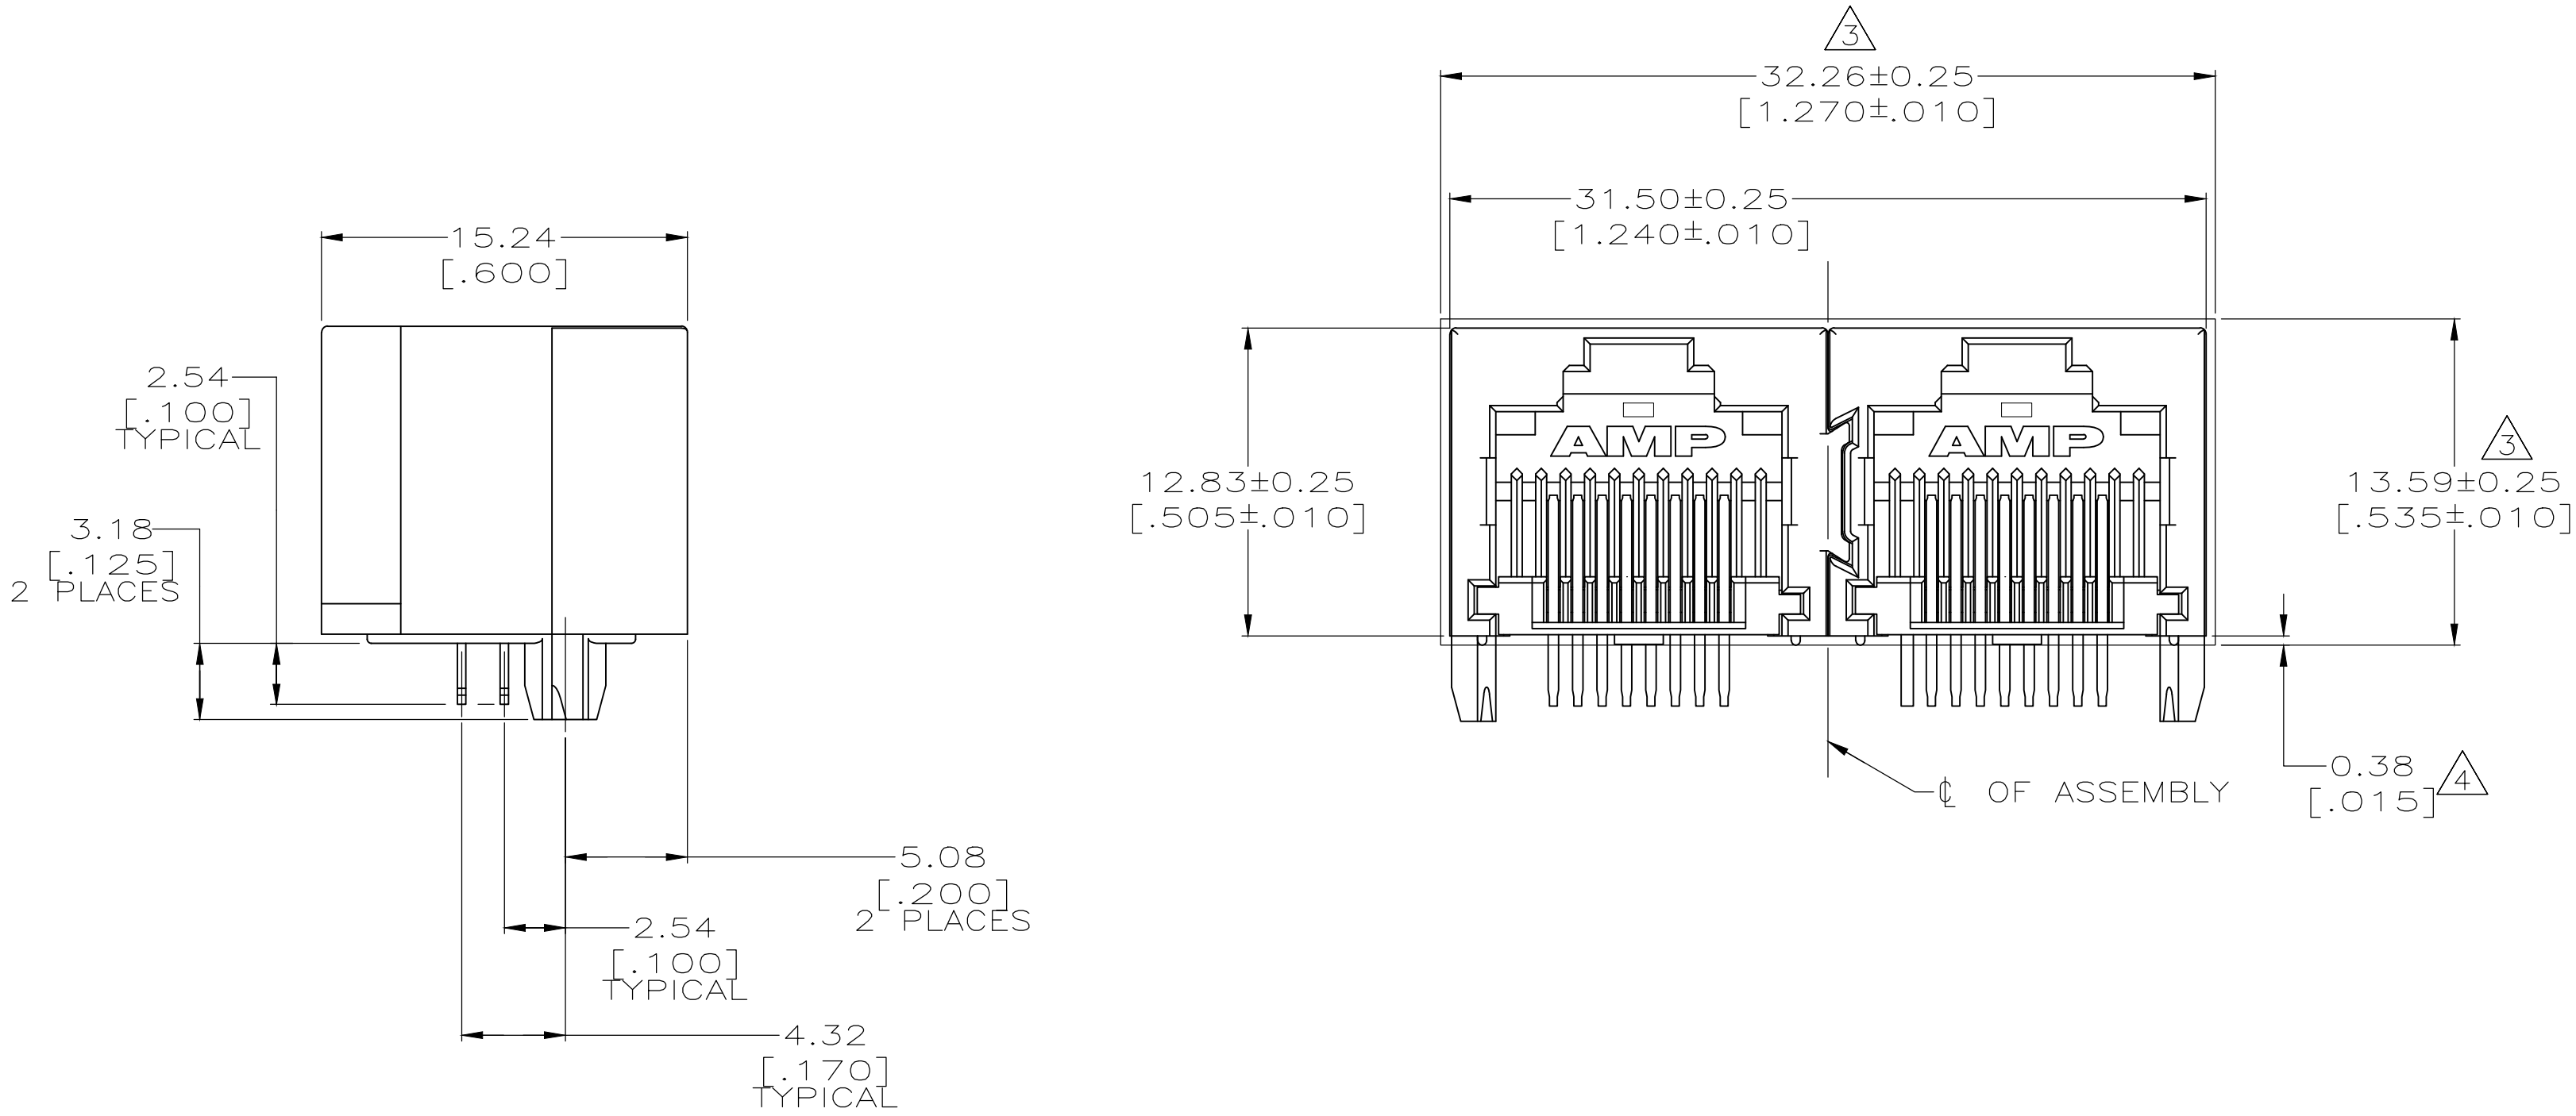

SUGGESTED PRINTED CIRCUIT BOARD LAYOUT
(COMPONENT SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. WOOTEN 22SEP97	OBSOLETE		406526-1	
		CHK T. SPRINKLE 29SEP97	PART NUMBER			
DIMENSIONS: mm		APVD M. DERSTINE 06OCT97	TE Connectivity			
		PRODUCT SPEC	INVERTED MOD JACK ASSEMBLY, 1x2			
		APPLICATION SPEC	-			
		WEIGHT	-			
MATERIAL 		FINISH -	SIZE A1	CAGE CODE 00779	DRAWING NO 406526	
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1	OF 1	
				REV B		