
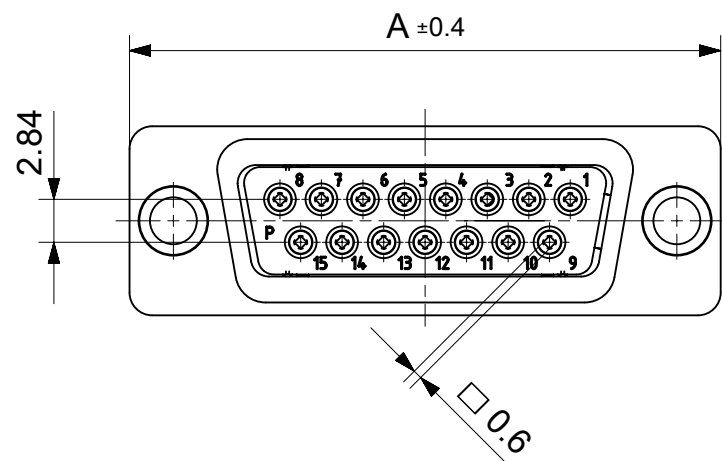
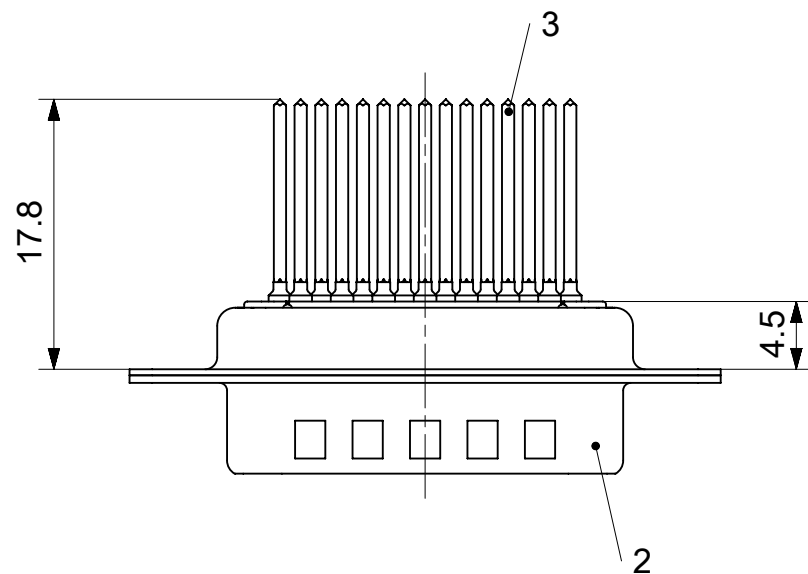
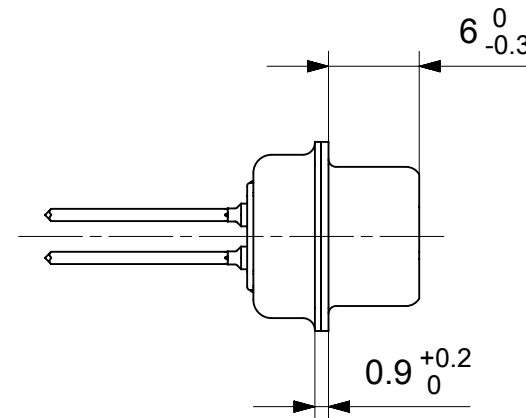


RoHS compliant
by exemption

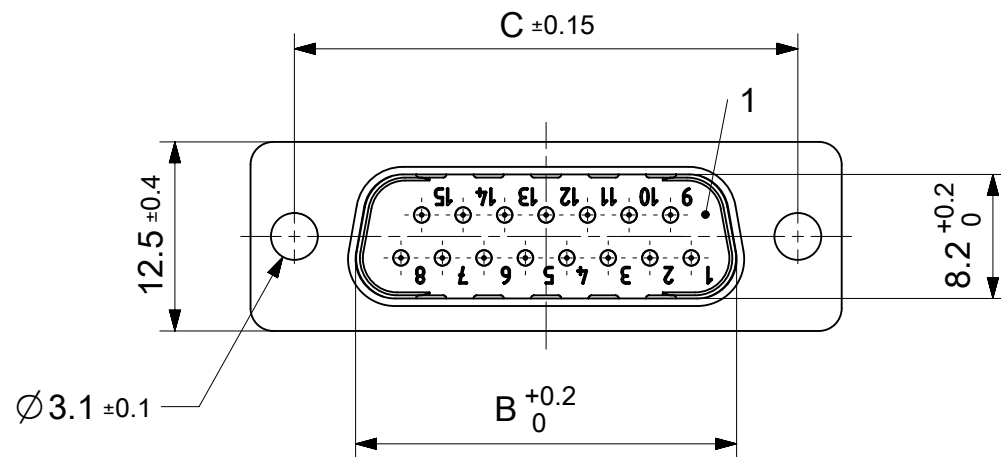

FCT Part number:

Fxx*1)P4y*2)

e.g. F15P4G1

*1) xx No. of contacts 09, 15, 25 or 37

*2) y for performance classes 1, 2 or 3

(contact cycle for G1/G2/G3 = 500/200/50)

Material Number	xx*1)	y*2)	A[mm]	B[mm]	C[mm]
1731090881	09	G1	30.8	16.9	25
1731090882		G2			
1731091811	15	G2	39.1	25.2	33.3
1731090923	25	G2	53	38.9	47.04
1731090939	37	G2	69.3	55.3	63.5

3	xx	Signal contact	P4 / Brass	G1 / G2
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +125°C) acc. UL94V-0	white
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m					REPLACEMENT FOR DOCUMENT NUMBER: FxxP4Gy								
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FUNCTIONAL SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC:			molex							
	mm	2:1											
E/A = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		FCT D-SUB MINIATURE CONNECTOR										
E/C = 0	ANGULAR TOL ± °		PRODUCT CUSTOMER DRAWING										
E/P = 0	4 PLACES ±		DOCUMENT NUMBER										
DIVISIONAL SYMBOLS	3 PLACES ±		EC NO: 712793		2021/12/23		DOC TYPE						
	2 PLACES ±		DRWN: SKANDB		2022/07/04								
	1 PLACE ±		CHK'D: MTEUBEL		2022/07/04								
	0 PLACES ±		APPR: MTEUBEL		2022/07/04		DOC PART						
	INITIAL REVISION:		2021/12/23		REVISION								
DRWN: SKANDB		2022/07/04											
APPR: MTEUBEL				1731090881				PSD					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		173109		SEE TABLE		GENERAL MARKET		1 OF 1	