5749110-1 ✓ ACTIVE

AMPLIMITE | AMPLIMITE 0.50 Series

TE Internal #: 5749110-1

Plug, 30 – 28 AWG Solid Wire Size, .05 – .1 mm² Solid Wire Size, Cable-to-Cable, 50 Position, AMPLIMITE 0.50 Series, IDC D-Sub

Connectors

View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > IDC D-Sub Connectors > IDC D-Sub: Plug Assembly, Signal, 1.27 mm



Connector & Housing Type: Plug

Solid Wire Size: 30 – 28 AWG

Shielded: No

Connector System: Cable-to-Cable

All IDC D-Sub: Plug Assembly, Signal, 1.27 mm (14)

Features

Product Type Features

Connector & Housing Type	Plug
Connector System	Cable-to-Cable
Connector Product Type	Connector Assembly
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	50
Number of Rows	2
Compatible With Wire & Cable Type	Round Jacketed Cable

Body Features

	.025 in
Primary Product Color	Black

Contact Features

Contact Options	Installed
Wire Contact Termination Area Plating Material	Tin
	30 μin
Contact Mating Area Plating Material	Gold or Gold Flash
Contact Underplating Material	Palladium Nickel



Contact Current Rating (Max) Termination Features Termination Cover Method Termination Cover Method Termination Cover Without Itermination Cover Lype Non Lacing Termination Method to Wire & Cable Insulation Displacement (IDC) Mechanical Attachment Mating Retention Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1.27 mm(,05 in] Dimensions Compatible Insulation Diameter (Max) Sofid Wire Size 30 –26 AWG Wire Size 30 –26 AWG Wire Size Usage Conditions Operating Temperature Range 55 – 105 °C[67 – 221 °F] Operation/Application Circuit Application Circuit Application Circuit Application Circuit Application UL Hammability Rating Packaging Features Packaging Features Packaging Method Tube	Contact Base Material	Phosphor Bronze
Termination Cover Method Termination Cover Without Termination Cover Type Non Lacing Termination Method to Wire & Cable Mechanical Attachment Mating Retention Without Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1,27 mm[,05 in] Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range J491 mm[,029036 in] Solid Wire Size Jusage Conditions Operating Temperature Range J55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Patwage Features Packaging Features Packaging Features	Contact Current Rating (Max)	
Termination Cover Type Non Lacing Termination Method to Wire & Cable Insulation Displacement (IDC) Mechanical Attachment Mating Retention Without Connector Mounting Type Cable Mount (Free Hanging) Housing Features I lousing Material Nylon, Polyester Centerline (Ptch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) .91 mm Compatible Insulation Diameter Range .74 – .91 mm[.029 – .036 in] Solid Wire Size .05 – .09 mm² Usage Conditions Operating Temperature Range .55 – 105 °C[.67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Termination Features	
Termination Cover Type Termination Method to Wire & Cable Insulation Displacement (IDC) Mechanical Attachment Mating Retention Without Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1,27 mml,05 in) Dimensions Compatible Insulation Diameter (Max) -91 mm Compatible Insulation Diameter Range .7491 mml,029036 in] Solid Wire Size .0509 mm² Usage Conditions Operating Temperature Range -55 _ 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Termination Cover Method	Assembled
Termination Method to Wire & Cable Mechanical Attachment Mating Retention Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range 7491 mm[.029036 in] Solid Wire Size 30 - 28 AWG Wire Size 0.509 mm² Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Ouantity 13	Termination Cover	Without
Mechanical Attachment Mating Retention Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Illousing Material Nylon, Polyester Centerline (Pitch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range 7.491 mm [.029036 in] Solid Wire Size 30 - 28 AWG Wire Size 0.509 mm² Usage Conditions Operating Temperature Range 55 - 105 °C[67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Termination Cover Type	Non Lacing
Mating Retention Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) 2.91 mm Compatible Insulation Diameter Range 3.0 – 28 AWG Wire Size 3.0 – 28 AWG Wire Size 0.5 – .09 mm² Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Termination Method to Wire & Cable	Insulation Displacement (IDC)
Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range .7491 mm[.029036 in] Solid Wire Size 30 - 28 AWG Wire Size .0509 mm² Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Planmability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Mechanical Attachment	
Housing Features Housing Material Nylon, Polyester Centerline (Pitch) 1.27 mm[,05 in] Dimensions Compatible Insulation Diameter (Max) .91 mm Compatible Insulation Diameter Range .74 – .91 mm[,029 – .036 in] Solid Wire Size 30 – 28 AWG Wire Size .05 – .09 mm² Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Mating Retention	Without
Housing Material Centerline (Pitch) 1.27 mm[.05 in] Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range .7491 mm[.029036 in] Solid Wire Size 30 - 28 AWG Wire Size .0509 mm² Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating Packaging Features Packaging Quantity 13	Connector Mounting Type	Cable Mount (Free-Hanging)
Centerline (Pitch) Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range .7491 mm [.029036 in] Solid Wire Size 30 - 28 AWG Wire Size .0509 mm² Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating Packaging Features Packaging Quantity 13	Housing Features	
Dimensions Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range .74 – .91 mm[.029 – .036 in] Solid Wire Size 30 – 28 AWG Wire Size .05 – .09 mm² Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Housing Material	Nylon, Polyester
Compatible Insulation Diameter (Max) Compatible Insulation Diameter Range .7491 mm[.029036 in] Solid Wire Size 30 - 28 AWG Wire Size .0509 mm² Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Centerline (Pitch)	1.27 mm[.05 in]
Compatible Insulation Diameter Range .74 – .91 mm[.029 – .036 in] Solid Wire Size 30 – 28 AWG Wire Size .05 – .09 mm² Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Dimensions	
Solid Wire Size 30 – 28 AWG Wire Size .05 – .09 mm² Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Compatible Insulation Diameter (Max)	.91 mm
Wire Size Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal No Industry Standards UL Flammability Rating Packaging Features Packaging Quantity .0509 mm² .0709 mm² .0809 mm² .0909 mm² .09 -	Compatible Insulation Diameter Range	.74 – .91 mm[.029 – .036 in]
Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Solid Wire Size	30 – 28 AWG
Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Wire Size	.05 – .09 mm²
Operation/Application Circuit Application Signal No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Usage Conditions	
Circuit Application Signal Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Shielded No Industry Standards UL Flammability Rating UL 94V-0 Packaging Features Packaging Quantity 13	Operation/Application	
Industry Standards UL Flammability Rating Packaging Features Packaging Quantity 13	Circuit Application	Signal
UL Flammability Rating Packaging Features Packaging Quantity 13	Shielded	No
Packaging Features Packaging Quantity 13	Industry Standards	
Packaging Quantity 13	UL Flammability Rating	UL 94V-0
	Packaging Features	
Packaging Method Tube	Packaging Quantity	13
	Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

Directive 2011/65/EU Compliant	
Directive 2011/03/EU	



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | AMPLIMITE 0.50 Series

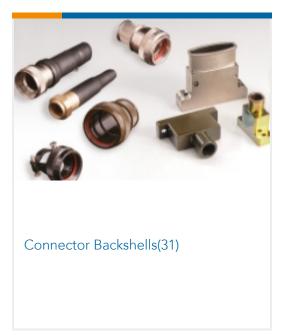






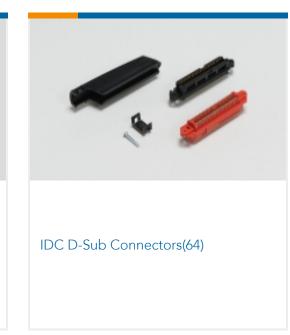



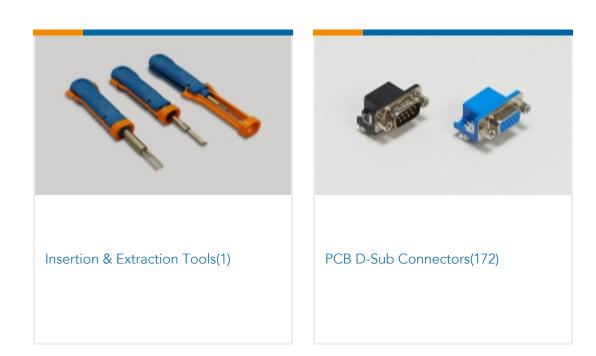

Customers Also Bought















Documents

Product Drawings

50 50SR CABLE PLUG SUB-ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5749110-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5749110-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5749110-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Plug, 30 – 28 AWG Solid Wire Size, .05 – .1 mm² Solid Wire Size, Cable-to-Cable, 50 Position, AMPLIMITE 0.50 Series, IDC D-Sub Connectors



Product Specifications

Product Specification

English

Agency Approvals

UL

English