

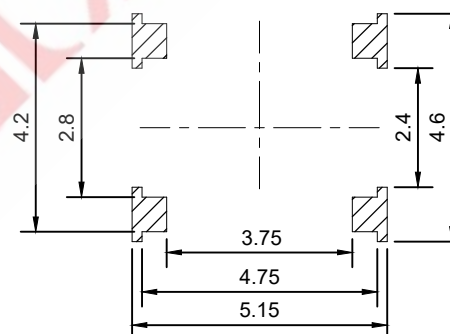


额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	$\leq 100\text{m}\Omega$
按力 Operating force	$\pm 50\text{gf}$
行程 Travel	$0.20 \pm 0.10\text{mm}$
绝缘电阻 Insulated resistance	$\geq 100\text{M}\Omega$
介电强度 Dielectric strength	$\geq 250\text{VAC}/1\text{min}$

A. 系列:U4-4.5*4.5薄膜系列
B. 贴装方式:4-立贴
C. 引脚规格:B-4PIN
D. 操作高度:55-0.55mm
E. 操作力度:1-180/2-260gf
F. 操作寿命:1-50,000/2-100,000/3-300,000次
G. 固定方式:1-不带住
H. 模具编码:0-U40

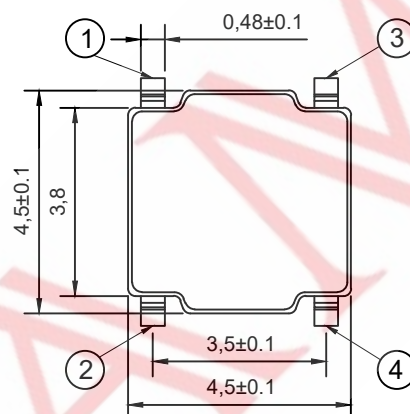


PCB. 焊接图



电路图
CIRCUIT DIAGRAM

			GENERAL TOLERANCE	
			$\geq 0 \sim 2 <$	± 0.15
DESIGN	WANGGUIFA	2018.06.12	$\geq 2 \sim 5 <$	± 0.25
CHECKED	ZHENGUILAN	2018.06.12	$\geq 0 \sim 2 <$	± 0.15
APPROVED	LILIAN.JIANG	2018.06.14	≥ 5	± 0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE:	
--------	--

4.5*4.5*0.55 側按沉板

of DWG NO: U44B55-E01

PART NO: U44B551006

MODEL NO:U44B55-*-*-10

NAME:

TACT SWITCH

SAMZO COMPONENTS
Electronic switch and connector manufacturer