


2/0 AWG
STRANDED

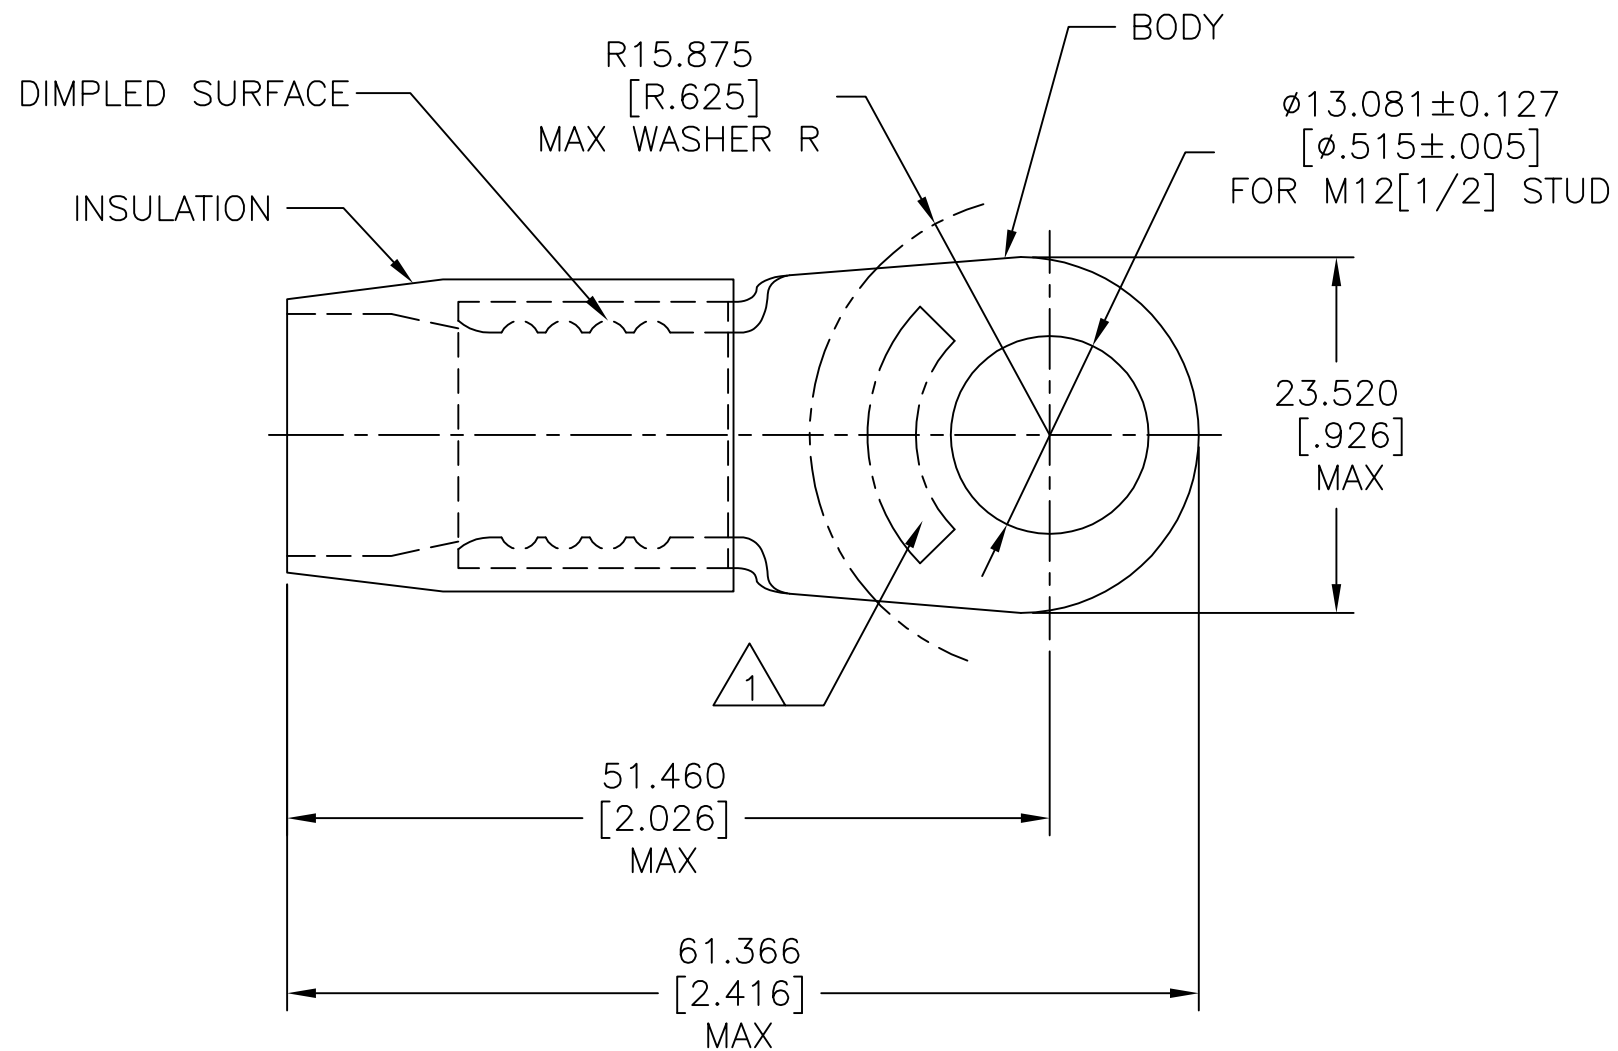

- 1 STAMP AMP 2/0 W*, LOCATE APPROX AS SHOWN.
- 2 BODY MATERIAL THK 2.032 ± 0.051 $[\text{.080} \pm \text{.002}]$
- 3 WIRE INSULATION $\phi 15.494$ $[\phi .610]$ MAX.
- 4 BODY: COPPER PER ASTM B-152
INSULATION: NYLON ASTM D4066 TYPE I.
- 5 BODY: TIN PLATED PER ASTM B-545
INSULATION: COLOR-YELLOW.

MS25036-137 CLASS 2	50	LOOSE PC	324085
MILITARY P/N AND CLASS	QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C[221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.S. GOULDEN 9-28-93	 TE Connectivity			
VOLTAGE RATING: —			CHK R. HERSEY 9-28-93				
CIRCULAR MIL AREA: 60.6–76.3mm ² [119,500–150,500] STRANDED	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M ELLIS 9-28-93	NAME TERMINAL, RING TONGUE, PLASTI-GRIP, WIRE SIZE: 2/0 AWG			
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± —	PRODUCT SPEC SAE AS7928				
	MATERIAL 	FINISH 	WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C=324085	RESTRICTED TO —
CUSTOMER DRAWING				SCALE NTS	SHEET 1 OF 1	REV F2	