

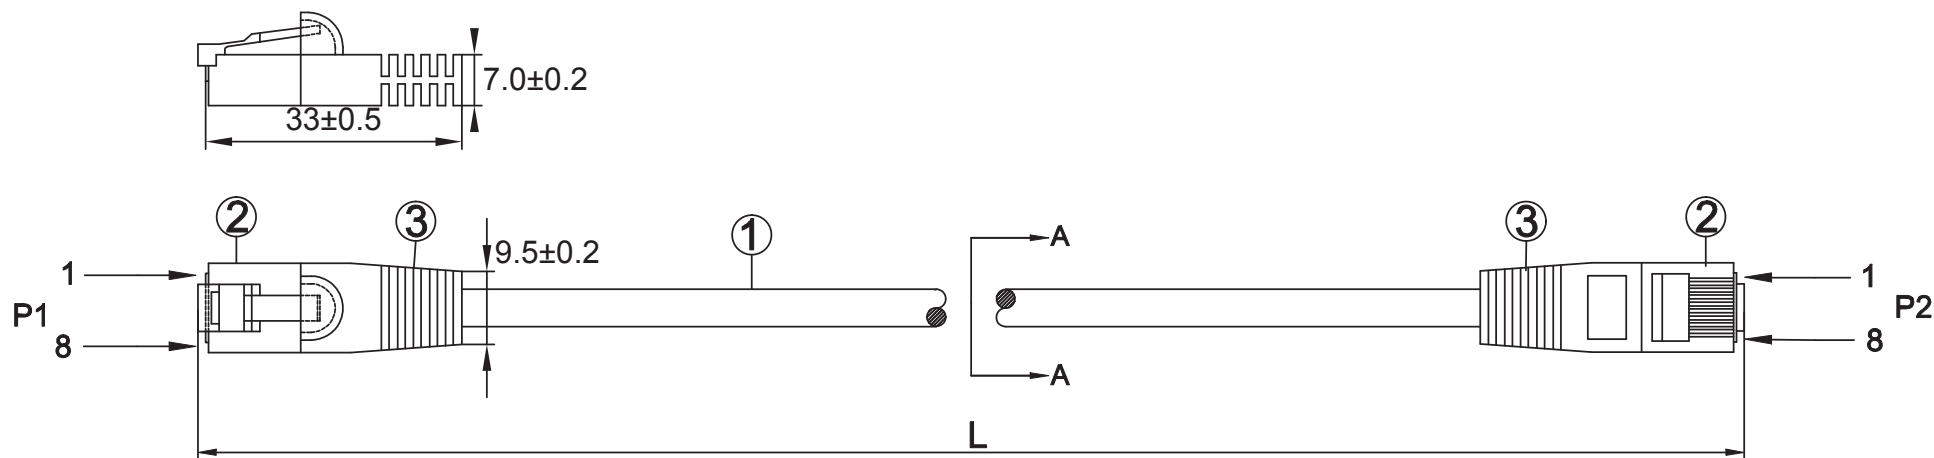


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD



INK MARKING<FP2047> : YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568.2-D ETL/3P
VERIFIED ▲ 24AWGX4P PATCH TYPE CMX(UL) E164469-XX



INSULATION:HDPE OD=0.9±0.05mm

JACKET:PVC OD=5.3±0.2mm

CONDUCTOR:[24AWG(7/0.175±0.008mm) BC]X4P

Operation Temperature:-20°C~+60°C
Conductor resistance:120 Ω /Km at 20°C

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	10	±2	1.67%
1	±1.2	10%	15	±3.15	1.75%
1.5	±1.2	6.67%	20	±4	1.67%
2	±1.2	5%	25	±4	1.33%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	75	±6	0.67%
5	±1.2	2%	100	±6	0.5%
6	±1.2	1.67%	150	±6	0.33%
7	±2	2.38%	200	±6	0.25%

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	3
2	ORANGE	6
3	WHITE/GREEN	1
6	GREEN	2
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8



orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

③	MOLD	PVC YU-19 GN509	A/R	Kg
②	CONN	8P8C 50U RJ45	2	PCS
①	CABLE	CAT.6 UTP PVC 24AWG*4P GY117 BC	A/R	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

CABLEMAX

Drawn By:	Date: 10 / 27 / 2022	Description: Cat.6 UTP Cross Booted Cables
Checked By:	Sheet 1 of 2	Model No. CM-1007XXXXBSTK
Approved By:	Scale 1:1	Rev. 01 Unit: mm

NOTE: CARTON MATERIAL MUST BE A=A

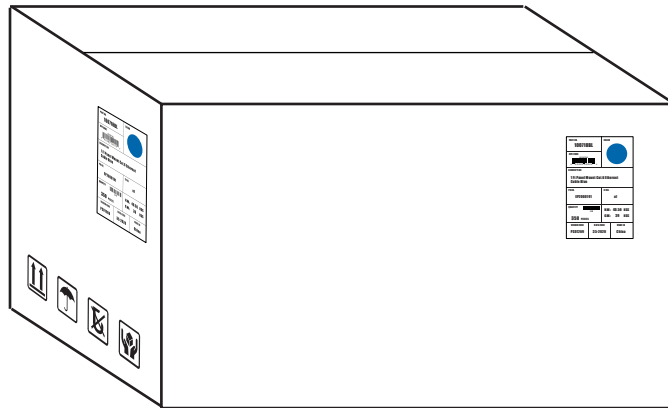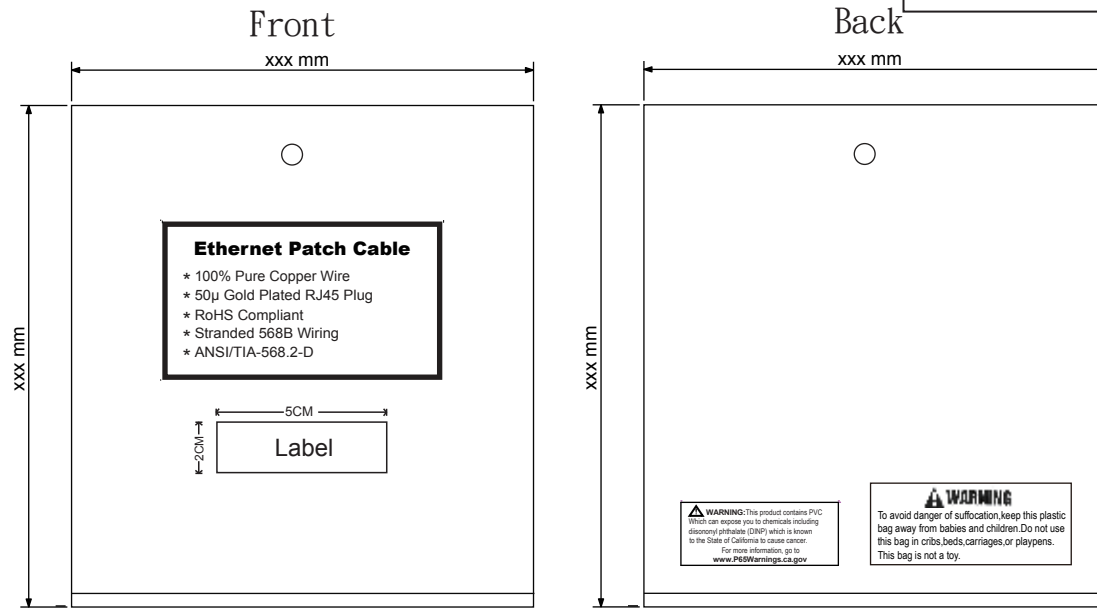

Cable Part No. Color Guide *Replace "XX" in the Part No. to the respective color code (e.x. CM-100716GNBSTK for a Green cable)

White = WT Gray = GY Black = BK Blue = BL Green = GN Purple = PU Yellow = YW Orange = OR Red = RD

E BAG SIZE(INCH)	PART NO.	length/FT	CARION SIZE(INCH)	Q'TY	G.W(LBS)
6.89x7.48	CM-100716XXBSTK	0.5	15.75x15.75x7.87	500	20.24
6.89x7.48	CM-100701XXBSTK	1	15.75x15.75x6.69	400	20.9
6.89x7.48	CM-100702XXBSTK	2	15.75x15.75x9.06	300	23.32
6.89x7.48	CM-100717XXBSTK	2	15.75x15.75x9.06	300	19.8
6.89x7.48	CM-100703XXBSTK	3	15.75x15.75x6.69	150	15.4
6.89x7.48	CM-100723XXBSTK	3	15.75x15.75x6.69	150	15.4
6.89x7.48	CM-100700XXBSTK	4	15.75x15.75x9.06	200	25.3
6.89x7.48	CM-100704XXBSTK	5	15.75x15.75x7.87	120	18.48
6.89x7.48	CM-100724XXBSTK	5	15.75x15.75x7.87	120	18.48
6.89x7.48	CM-100713XXBSTK	6	15.75x15.75x9.06	150	26.4
6.89x7.48	CM-100705XXBSTK	7	15.75x15.75x7.87	120	23.98
6.89x7.48	CM-100725XXBSTK	7	15.75x15.75x7.87	120	23.98
6.89x7.48	CM-100748XXBSTK	8	15.75x15.75x9.06	110	24.86
6.89x7.48	CM-100749XXBSTK	9	15.75x15.75x9.06	90	22.66
6.89x7.48	CM-100726XXBSTK	10	15.75x15.75x7.87	100	27.06
6.89x7.48	CM-100747XXBSTK	12	15.75x15.75x7.87	80	25.74
6.89x9.06	CM-100727XXBSTK	15	15.75x15.75x9.06	70	27.72
6.89x9.06	CM-100714XXBSTK	20	15.75x15.75x9.06	60	30.8
6.89x9.06	CM-100708XXBSTK	25	15.75x15.75x9.06	50	31.68
6.89x9.06	CM-100719XXBSTK	30	15.75x15.75x7.87	45	33.66
9.25x10.63	CM-100718XXBSTK	35	15.75x15.75x9.06	40	35.2
9.25x10.63	CM-100720XXBSTK	40	15.75x15.75x7.87	25	25.3
9.25x10.63	CM-100709XXBSTK	50	15.75x15.75x9.06	25	31.24
9.25x11.81	CM-100710XXBSTK	75	15.75x15.75x9.06	20	36.74
9.25x11.81	CM-100711XXBSTK	100	16.54x16.54x10.24	20	48.62
11.81x14.96	CM-100712XXBSTK	150	18.11x9.84x11.02	10	36.3
11.81x14.96	CM-100715XXBSTK	200	18.11x9.84x11.02	8	38.28

CABLEMAX

Drawn By:	Date: 10 / 27 / 2022	Description: Cat.6 UTP Cross Booted Cables
Checked By:	Sheet 1 of 2	Model No. CM-1007XXXXBSTK
Approved By:	Scale 1:1	Rev. 01 Unit: mm 