
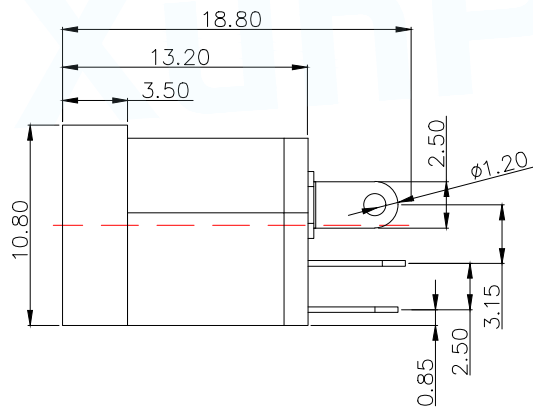
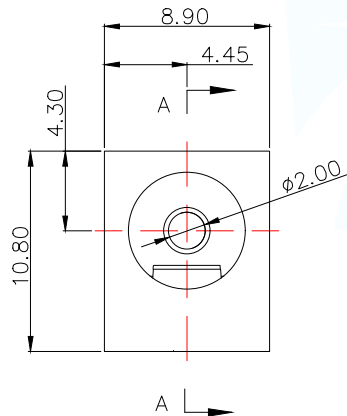
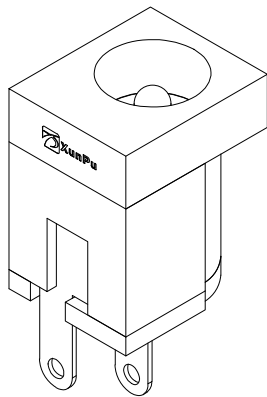
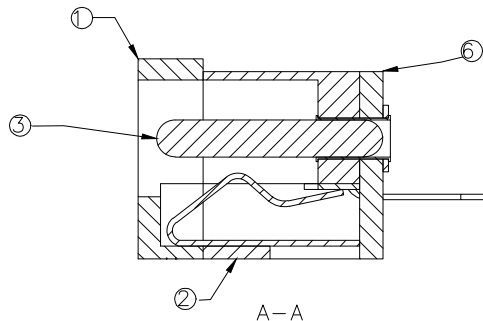
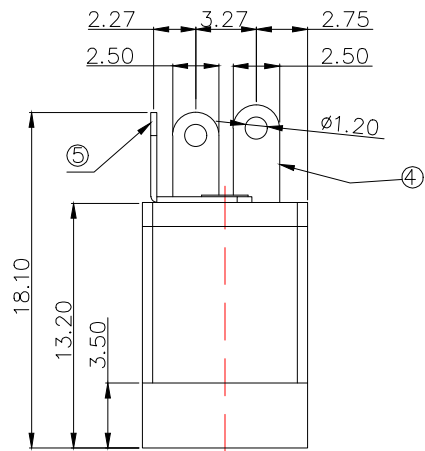


PCB.WELDING DRAWING (TOLERANCE: ±0.05)

Main technical performance	
Rated electrical load	DC 24V 2.5A
Contact resistance	≤30mΩ
Insulation resistance	≥100MΩ
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

6	弹片	1	H65	镀银
5	插片	1	H62	镀银
4	平片	1	H62	镀银
3	中心针	1	H62	铜锡
2	盖板	1	PPA	黑
1	基座	1	PPA	黑
序号	名称	数量	材料	备注

MANUFACTURE DWG

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X.X±0.30
X.XX±0.25
X.XXX±0.15

ANGLES: X.°±5°
X.X'±1°

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

CUSTOMER COPY

TITLE: DC SOCKET

PAR	DC-012-B200
DWN	
CHKD	
APVD	
SCALE N: A	UNIT: MM
SIZE: A4	SHEET: 1F1

REV: A