

目 录 MAPX	设 变 内 容 MODIFICATION	日 期 DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000M Ω Min.

Contact Resistance:30 M Ω Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35 $^{\circ}$ C to +85 $^{\circ}$ C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Umating Force:0.7 KG MIN.

Contact finish:


01: Selective Gold Flash

02: Selective Gold 3U”




03: Selective Gold 5U”

04: Selective Gold 15U”

05: Selective Gold 30U”

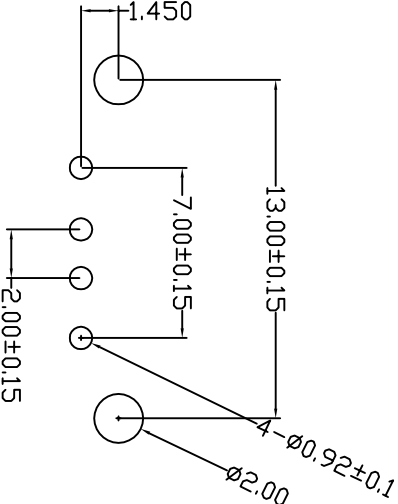

RECOMMENDED P.C.B LAYOUT

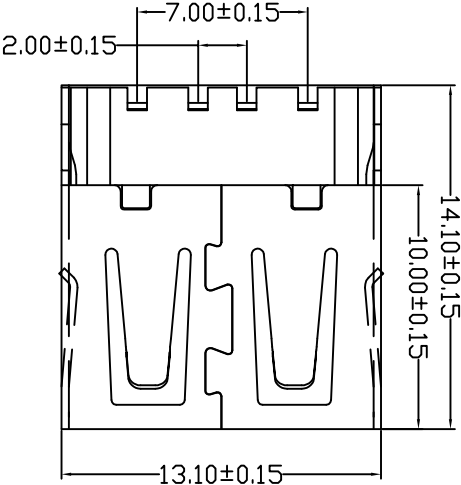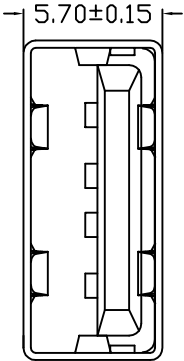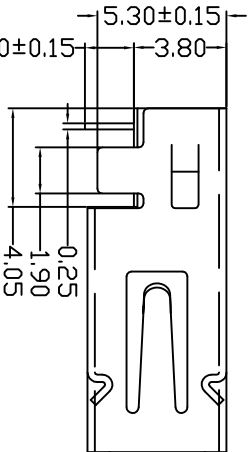

备注：侧弹分为外弹与内弹

深圳市精拓金电子有限公司

产 品 图 PRODUCT CHART DWG				深圳市精拓金电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.	
X	±0.25	X.	±5"				
.X	±0.20	.X'	±2"	比例 SCALE	1:1	审核 CHKD	雷永键
.XX	±0.15	.XX'	±1"	日期 DATE	2009/10/20	核准 APPD	雷永键
.XXX	±0.10	.XXX'	±0.5"			角法 VIEW	  版本 VER
							A0