




Connectors > Automotive Connectors > Automotive Housings > MULTILOCK, CONNECTOR HOUSING

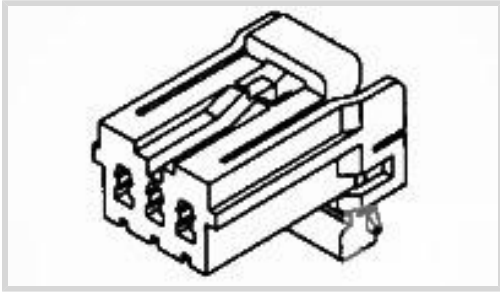

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **3.5 mm [.138 in]**

Sealable: **No**

[All MULTILOCK, CONNECTOR HOUSING \(393\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Yellow

Contact Features

Contact Size	1.8mm
--------------	-------



Contact Type	Receptacle
Mating Tab Width	1.8 mm[.071 in]

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT
Centerline (Pitch)	3.5 mm[.138 in]

Dimensions

Connector Height	15.9 mm[.626 in]
Product Width	17.4 mm[.685 in]
Product Length	21.6 mm[.85 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # CAT-M9194-T273
MULTILOCK, RECEPTACLE AND TAB

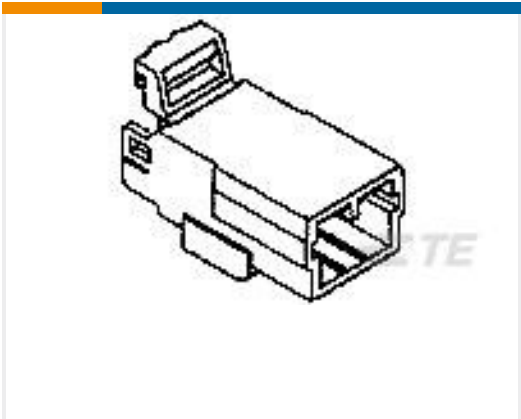

TE Part # 174929-2
070 MLC W-W CAP HSG 4P B

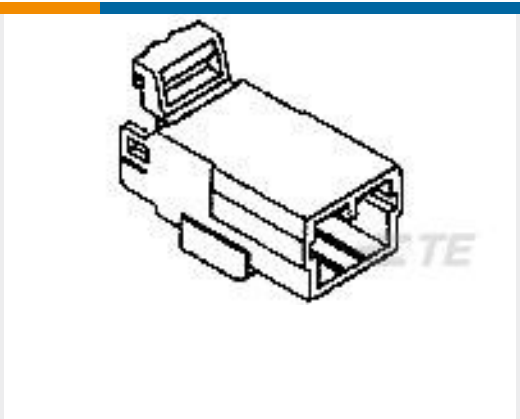

TE Part # 174929-1
070 MLC W-W CAP HSG 4P NATURAL

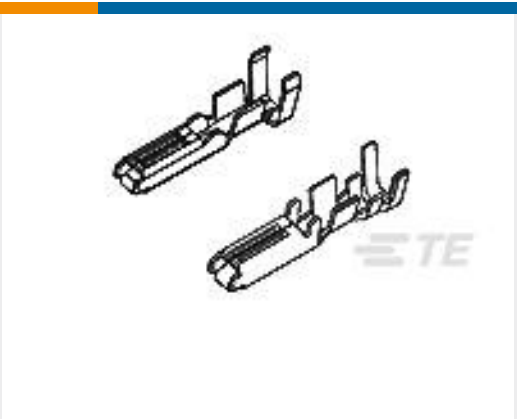

TE Part # 345208-1
070 SERIES RECEPT.



TE Part # 175026-1
070 REC CONTACT L.P 24-22



Also in the Series | Multilock Connector System

Automotive Connector Caps & Covers(10)	Automotive Connector Locks & Position Assurance(3)	Automotive Housings(445)	Automotive Terminals(118)
Connector Seals & Cavity Plugs(2)	Insertion & Extraction Tools(6)	Other Automotive Connector Accessories(12)	PCB Headers & Receptacles(135)

Customers Also Bought

 MQS RETAINER FOR 2POS REC.HSG	 15P STR/REL HSG HNGD V0	 5X3 MTE SHRD PIN SR LATCH .100	 MR SPLT GROMET .218 DIA BLK LF
 ROUND CONNECTOR SYSTEM, PIN AND SOCKET	 MQS0,63 Sn rec LL unseal. 0,2-0,5	 CT CRIMP REC HSG 8P NATURAL	 8POS,MIXED,REC HSG,ASSY,SLD
 SIZE 8 PIN CONT ASSY,8 AWG			



Documents

Product Drawings

070 MLC W-W PLUG HSG 4P YELLOW

English

CAD Files

Customer View Model

ENG_CVM_CVM_174922-7_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_174922-7_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_174922-7_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

MULTILOCK Connector System

English

Product Specifications

Product Specification

Japanese

Product Specification

Japanese