
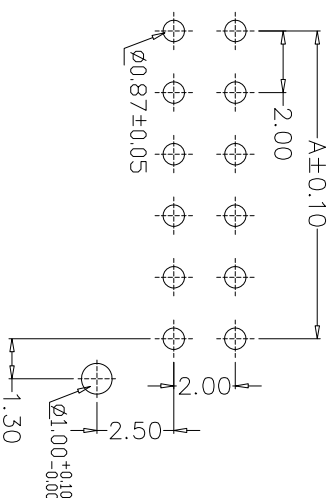
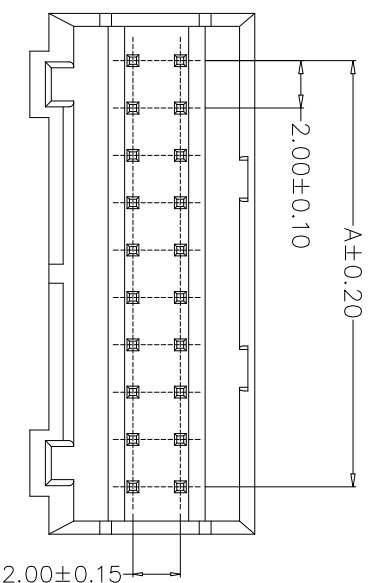
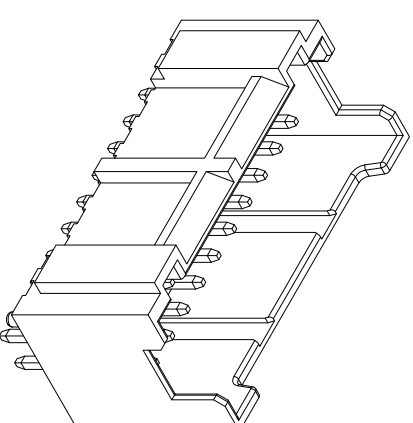
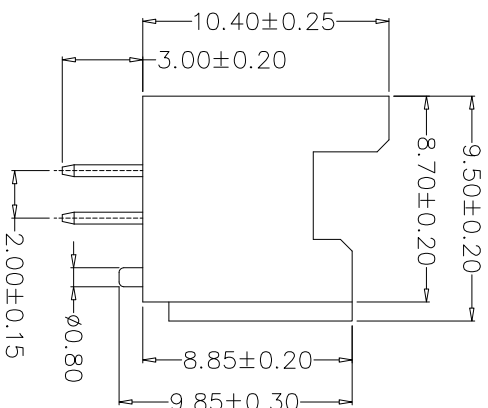


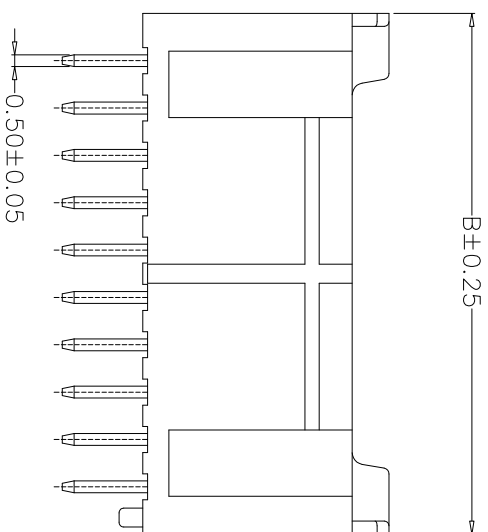

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon46, UL94V-0
PIN Brass Tin-plated

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A2015-2X02A	2.00	6.00
A2015-2X03A	4.00	8.00
A2015-2X04A	6.00	10.00
A2015-2X05A	8.00	12.00
A2015-2X06A	10.00	14.00
A2015-2X07A	12.00	16.00
A2015-2X08A	14.00	18.00
A2015-2X09A	16.00	20.00
A2015-2X10A	18.00	22.00
A2015-2X11A	20.00	24.00
A2015-2X12A	22.00	26.00
A2015-2X20A	38.00	42.00



x. ±0.5	x.*±
---------	------

单位	mm
比例	
SCALE	

批准:	版本: A0	产品名称	SPH直针 WAFER DIP TYPE
审核:	页次: 1/1	产品料号	
CHECKED BY	日期:	Product No	TH-A2015-2xNA
DRAWN BY	封文辉	客户料号	
		Client No	

深圳市泰华电子有限公司

TaiHua Electronics Co., Ltd