

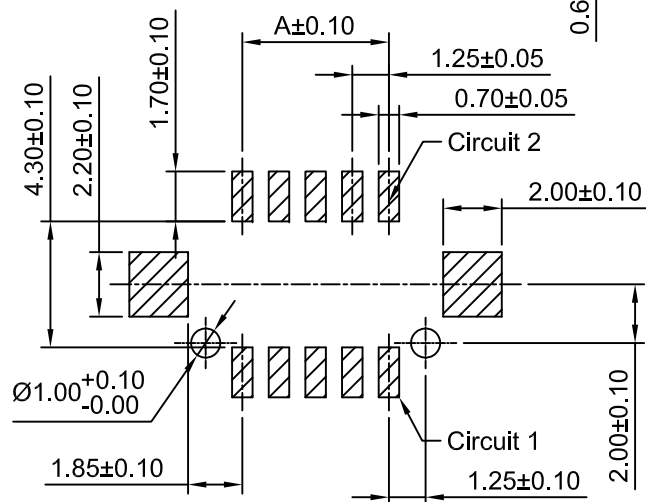
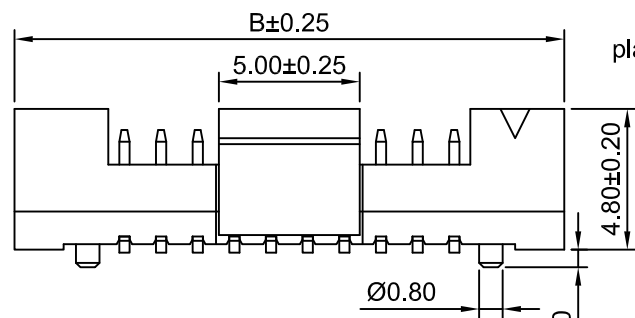
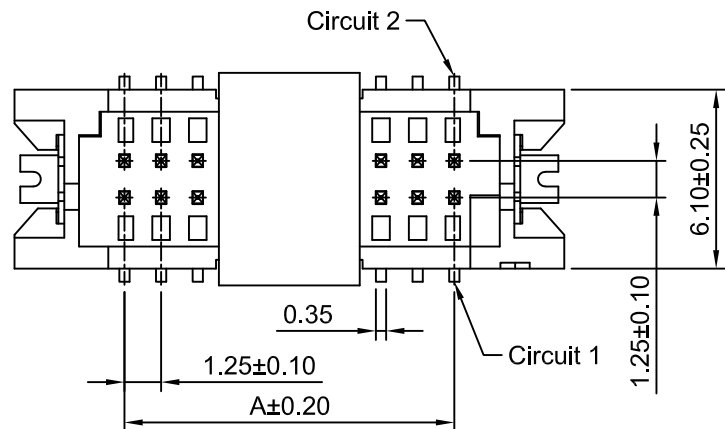
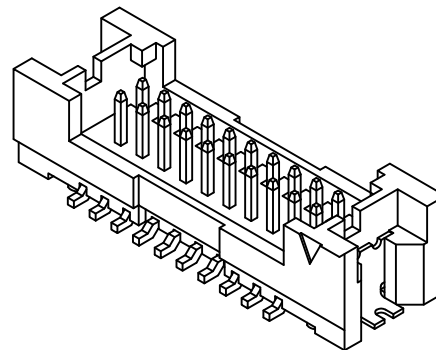




P.C.B LAYOUT

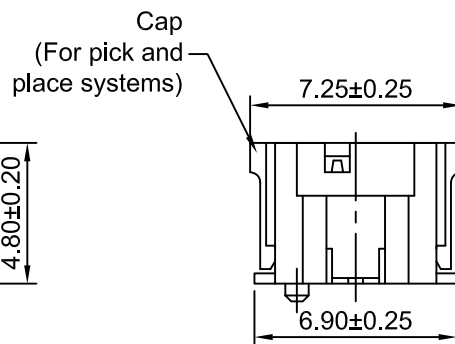

Ordering Information:

A1252WV-S-F-2xXP - $\frac{**}{2}$ - $\frac{**}{3}$

1.Part NO.

2.Material:

(Blank): Nylon 6T,UL94V-0(Ivory)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Solder Tabs:Phosphor Bronze/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x5P	5.00	12.30	2x10P	11.25	18.65
2x6P	6.25	13.55	2x15P	17.50	24.80
2x7P	7.50	14.60	2x20P	23.75	31.10
2x9P	10.00	17.10			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE 1.25mm PITCH VERTICAL DUAL ROW -SMD TYPE		
mm			4:1			1 of 1					
DRWN			CHK'D			APPR					
Chengblao Ye			Dlankul Wan			Jack Yin					
General Tolerances						THIRD ANGLE PROJECTION					
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°											
DRAWING NO.									REV		
A1252WV-S-F-2xXP									A2		