



Enclosure for command devices, 22 mm, round, enclosure material metal, Enclosure top part yellow, 1 control point metal, A=Emergency stop mushroom pushbutton red, 40 mm, rotate-to-unlatch, 2 NC, spring-loaded terminal, floor mounting, silver label, black font, with graphic symbol: Emergency stop, M12 connector (5-pin) bottom, insulated reserve conductors Label glued in

product brand name	SIRIUS ACT
product designation	Enclosures
product type designation	3SU1
manufacturer's article number	
• of supplied contact module	A1 = 3SU1400-1AA10-3CA0 / A2 = 3SU1400-1AA10-3CA0
• of supplied contact module at the command point A1	3SU1400-1AA10-3CA0
• of supplied contact module at the command point A2	3SU1400-1AA10-3CA0
• of the supplied holder	A = 3SU1550-0AA10-0AA0
• of the supplied holder at the command point A	3SU1550-0AA10-0AA0
• of the supplied actuator	A = 3SU1050-1HB20-0AA0
• of the supplied actuator at the command point A	3SU1050-1HB20-0AA0
• of supplied empty enclosure	3SU1851-0AA00-0AB2
Enclosure	
design of the housing	with recess for label
shape of the enclosure front	Square
material of the enclosure	metal
number of command points	1
product component	
• EMERGENCY STOP device	Yes
• protective collar	No
color of the enclosure top part	grey
delivery state	
• as a kit	No
• pre-wired on strip terminal	Yes
fastening method of the enclosure	Vertical
Actuator	
design of the actuating element	Emergency stop mushroom pushbutton
suitability for use EMERGENCY OFF switch	Yes
product feature lockout	No
product extension optional light source	No
color of the actuating element	red
material of the actuating element	plastic
shape of the actuating element	round
number of contact modules	2
type of unlocking device	A = rotate-to-unlatch mechanism
Front ring	

product component front ring	No
Holder	
material of the holder	Metal
Display	
number of LED modules	0
General technical data	
product function	
• positive opening	Yes
• EMERGENCY OFF function	Yes
• EMERGENCY STOP function	Yes
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
vibration resistance	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g
reference code acc. to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10 A
• operating voltage at AC	
— at 50 Hz rated value	5 ... 500 V
— at 60 Hz rated value	5 ... 500 V
• operating voltage at DC rated value	5 ... 500 V
cable entry type	M12 5-pole connector
Communication/ Protocol	
design of the interface for communication	without
Auxiliary circuit	
design of the contact of auxiliary contacts	Silver alloy
number of NC contacts for auxiliary contacts	2
number of NO contacts for auxiliary contacts	0
Connections/ Terminals	
type of electrical connection of modules and accessories	Spring-type terminal
type of electrical connection on enclosure	M12 connector, 5-pole
tightening torque of the screws in the bracket	1 ... 1.2 N·m
tightening torque of fixing screws in the enclosure cover	1.5 ... 1.7 N·m
Ambient conditions	
• ambient temperature during operation	-25 ... +70 °C
• ambient temperature during storage	-40 ... +80 °C
environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel)
Installation/ mounting/ dimensions	
fastening method of modules and accessories	Floor mounting
height	89.4 mm
width	85 mm
depth	109 mm
shape of the installation opening	round
Accessories	
number of labels	1
color of the label	A = black
number of inscription plates	0
Certificates/ approvals	
General Product Approval	



Declaration of Conformity

Test Certificates

Marine / Shipping

[Miscellaneous](#)

[Miscellaneous](#)



EG-Konf.



EG-Konf.

[Type Test
Certificates/Test
Report](#)



ABS

Marine / Shipping

other



LRS



PRS



RINA



RMRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1851-0NH00-4NB2>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1851-0NH00-4NB2>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1851-0NH00-4NB2>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1851-0NH00-4NB2&lang=en

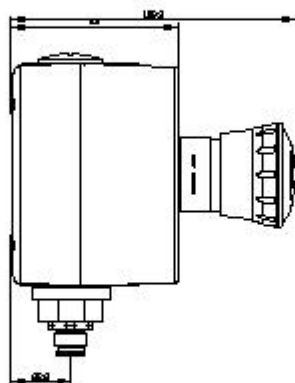



1	BN = Brown	→	21
2	BH = White	→	11
3	BU = Blue	→	n.c.
4	BK = Black	→	22
5	GY = Grey	→	12



last modified:

11/24/2020