

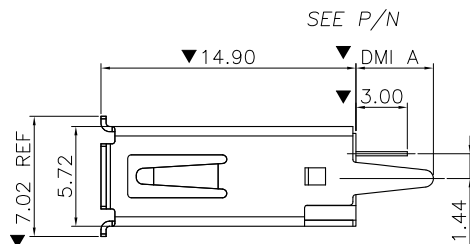


TOLERANCE: ± 0.05 ,
RECOMMENDED PCB LAYOUT
(TOP VIEW)



NOTES:

1.MATERIAL:

1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.

1.2 SPRING CONTACT: COPPER ALLOY.

1.3 FLAT CONTACT;COPPER ALLOY


1.4 SHELL :COPPER ALLOY.

1.5 COVER:HIGH TEMPERATURE THERAL PLASTIC.

2.FINISH:

2.1 CONTACT: (SEE P/N.), [50μ"] MIN. NICKEL UNDERPLATING OVER ALL.

2.2 SHELL: [50 μ] MIN. SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

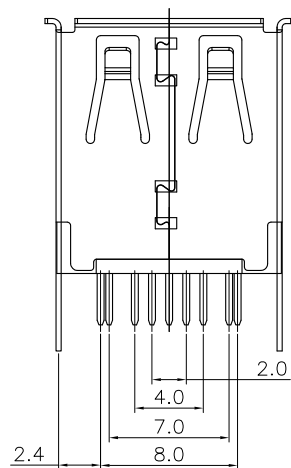

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-262A101DY20400		
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF3. 0/180度15. 0直脚有边铜壳LCP蓝色		
.X	±0.20	.X	±2.°	日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW		版本 VER	AO
.XX	±0.15	.XX	±1.°								
.XXX	±0.10	.XXX	±0.5°								