

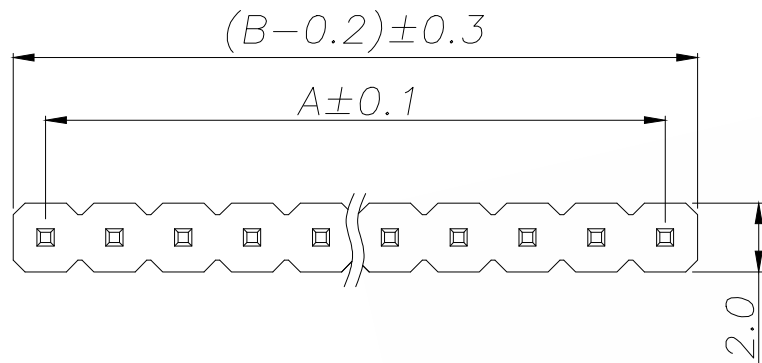
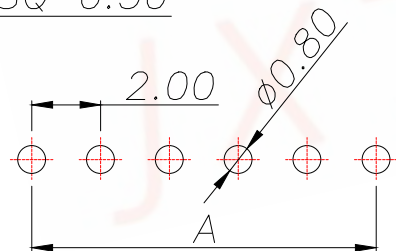


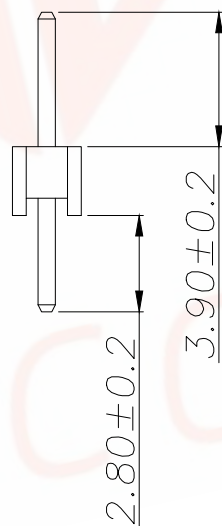

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

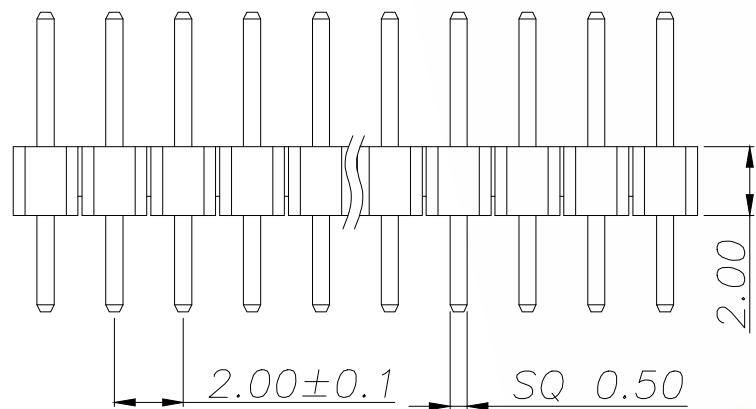

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
PZ2.0V-1101P-H20	1	0.00	2.00
PZ2.0V-1102P-H20	2	2.00	4.00
PZ2.0V-1103P-H20	3	4.00	6.00
PZ2.0V-1104P-H20	4	6.00	8.00
PZ2.0V-1105P-H20	5	8.00	10.00
PZ2.0V-1106P-H20	6	10.00	12.00
PZ2.0V-1107P-H20	7	12.00	14.00
PZ2.0V-1108P-H20	8	14.00	16.00
PZ2.0V-1109P-H20	9	16.00	18.00
.....			
PZ2.0V-1140P-H20	40	(40-1)x2.0	(40)x2.0

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO.	TITLE: 2.0PH H2.0 1xnPin 180		
.XX ±0.20	X.X* ±1°	PZ2.0V-11NP-H20	度 PC2.8 PA3.9 PB2.0 L8.7		
.XXX ±0.10	X.XX* ±0.5°		6T		
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1