


Feature -

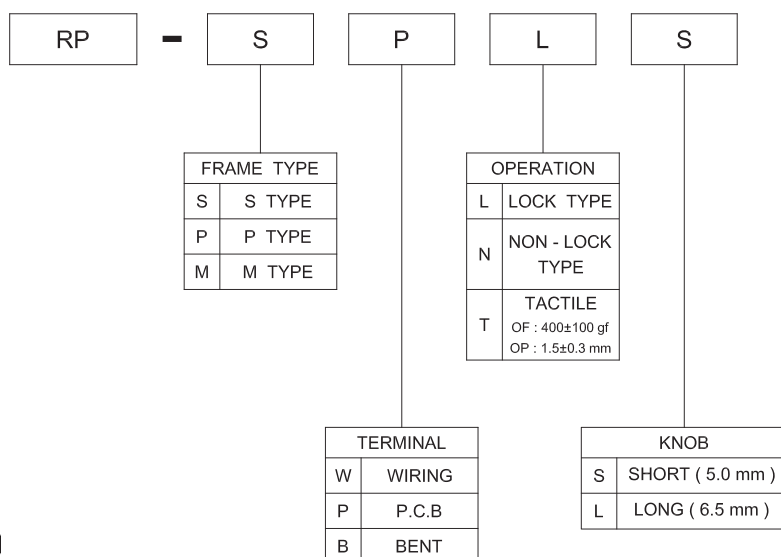
with screw mount installation
wire and PCB terminal

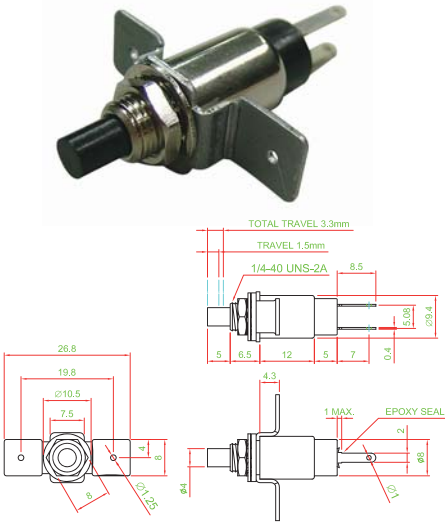
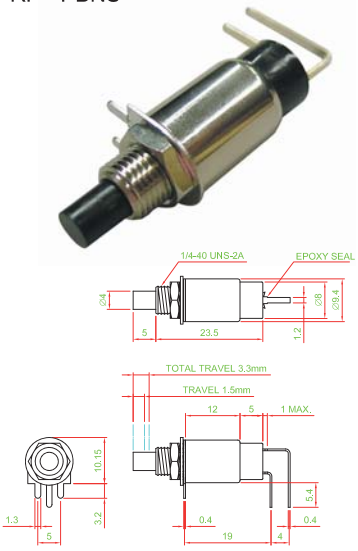
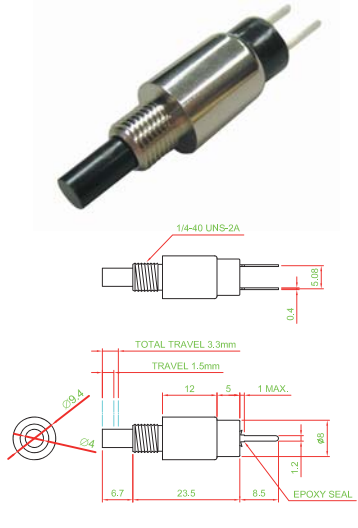



Application -

consumer products
computer products
instrumentation
communication equipments

SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	SPST , Momentary and Lock Type are Available
CONTACT RATING	120 V AC or 28 V DC , 1 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	650 ± 150 gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	3.3 ± 0.3 mm

HOW TO ORDER


▶ DIMENSION				
RP - MWNS 		RP - PBNS 		
		RP - SPL 		
▶ FRAME TYPE			▶ P.C.B LAYOUT	
S TYPE	P TYPE	M TYPE	RP - □P□□  RP - □B□□ 	
▶ TERMINAL TYPE				
W TYPE	P TYPE	B TYPE		
▶ CIRCUIT		▶ MATERIAL		
		■ FRAME : BRASS NICKEL PLATED ■ ACTUATOR : POM ■ BASE FRAME : PA66 ■ TERMINAL : BRONZE SILVER PLATING		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Well Buying:

[RP-MBNS](#) [RP-SPNL](#) [RP-SWNL](#)