



**Feature -**

small size  
bi-color LED illuminated available  
right angle and vertical PCB terminal  
SPDT, DPDT, lock / non-lock function

**Application -**

consumer products  
computer products  
instrumentation  
communication equipments

► **SPECIFICATIONS**

SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T, 2P2T LOCK / NON-LOCK Action with LED
CONTACT RATING	30 VDC, 0.1A / 5 VDC, 0.1mA
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC; 100 mA, by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100 gf
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	TRAVEL - 0.7 ± 0.3 mm FULL TRAVEL - 1.5 ± 0.3 mm

LED SPECIFICATIONS		Value / LED Color					
		Unit	Blue				
			Blue	Green	Red	White	Yellow
FORWARD CURRENT	If	mA	10	20	20	2	20
REVERSE VOLTAGE	Vr	V	5.0	5.0	5.0	5.0	5.0
REVERSE CURRENT	Ir	μA	10	10	10	10	10
FORWARD VOLTAGE	Vf	V	@ 10mA 3.0-4.0	2.1-2.5	2.0-2.5	@ 2mA 2.8-4.0	2.0-2.5
LUMINOUS INTENSITY	Iv	mcd	@ 10mA 200	800	1800	@ 2mA 12	1800

■ Physical and electrical information of LED will be provided upon customer's request on switches.


► **HOW TO ORDER**

PS004	-	L	2	2	N	P	X	X	X		U	G	X	X	
		OPERATION		POSITION		TERMINAL		HOUSING COLOR		CAP SYMBOL		LED COLOR		LED COLOR	
		N NON-LOCK ( std. )		2 2 POSITION ( std. )		P P.C.B TYPE ( std. )		K BLACK ( std. )		Please refer to appendix 1(knob)  For example		B BLUE		B BLUE	
		L LOCK TYPE				R RIGHT ANGLE TYPE		G GRAY		K3 PK3:Printing K3:Laser carving		G GREEN		G GREEN	
		T TACTILE				R1 RIGHT ANGLE TYPE 1		W WHITE		E1 PE1:Printing E1:Laser carving		R RED		R RED	
						R2 RIGHT ANGLE TYPE 2		X WITHOUT		WITHOUT		W WHITE		W WHITE	
						R3 RIGHT ANGLE TYPE 3						Y YELLOW		Y YELLOW	
						R4 RIGHT ANGLE TYPE 4						X WITHOUT		X WITHOUT	




► DIMENSION


PS004-L22NPXXX□□□□

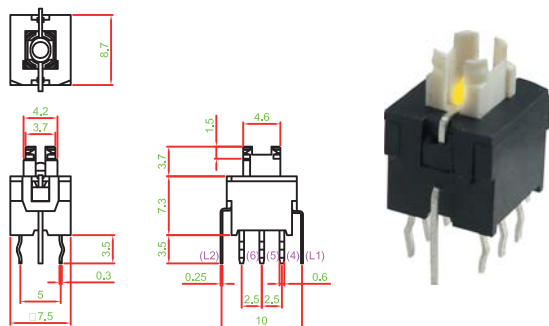


PS004-L22NPS1KT□□□□

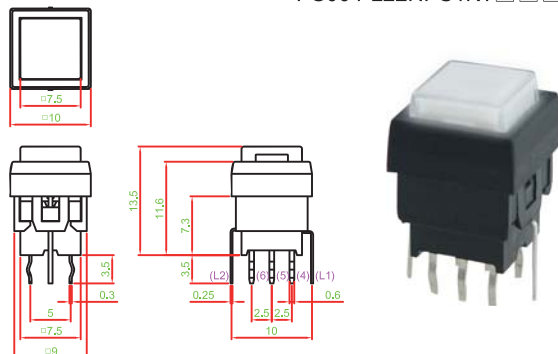


PS004-N22NPS2KT□□□□

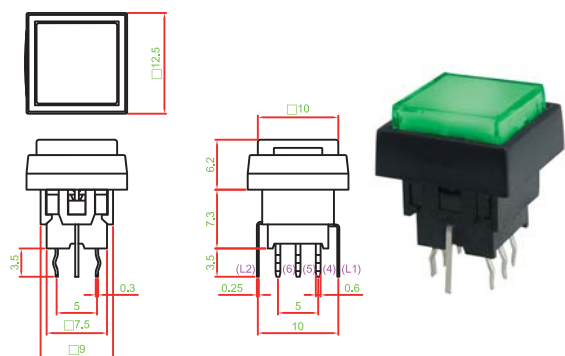


PS004-N22NPS2HKK□□□□

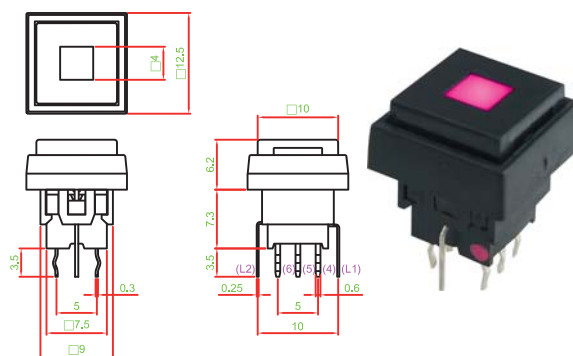


PS004-L22NPS3XT□□□□

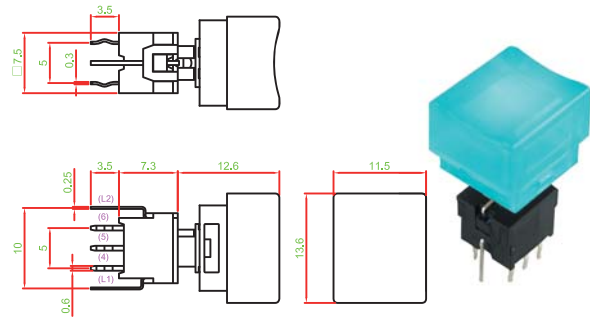


PS004-L22NPR1AXT□□□□

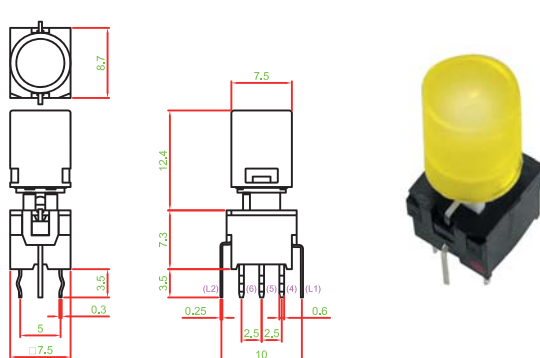

PS004-L22NPR1KT□□□□

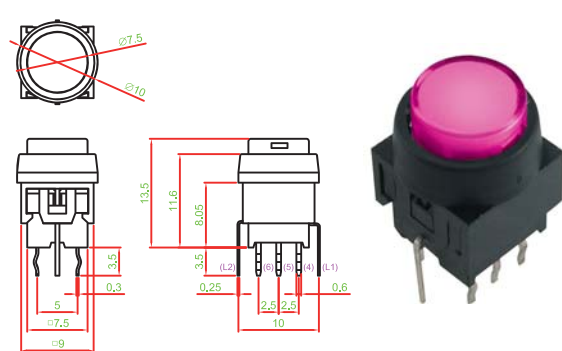


PS004-N22NPR2KT□□□□

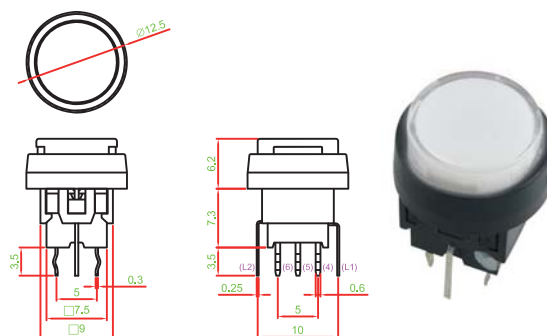




► DIMENSION


PS004-L22NPR2.1KT□□□□

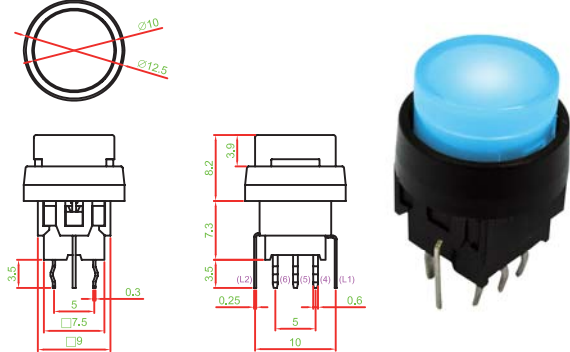


PS004-N22NPR2HKK□□□□

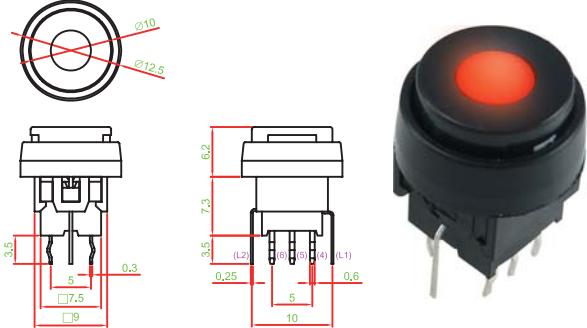


PS004-N22NPR3KT□□□□

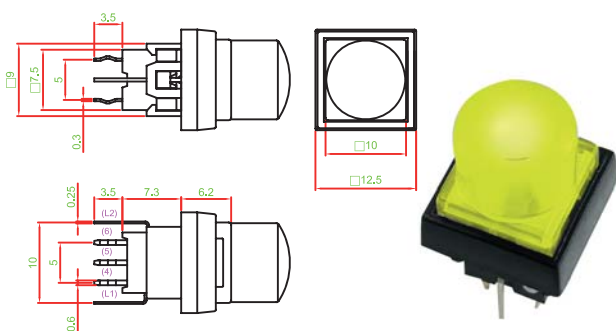


PS004-L22NPR2ABT□□□□

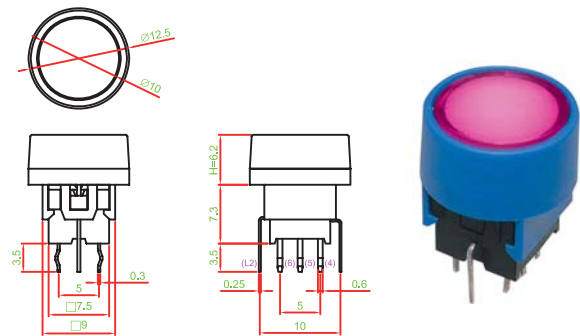


PS004-L22NPR2BBT□□□□

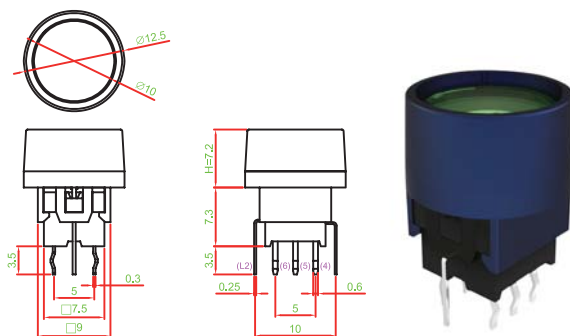


PS004-L22NPR2CBT□□□□

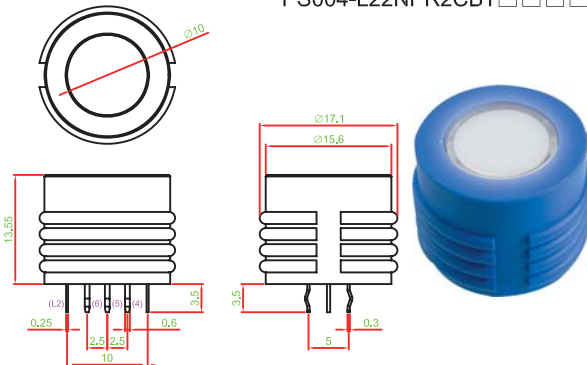

PS004-L22NPR2DBT□□□□

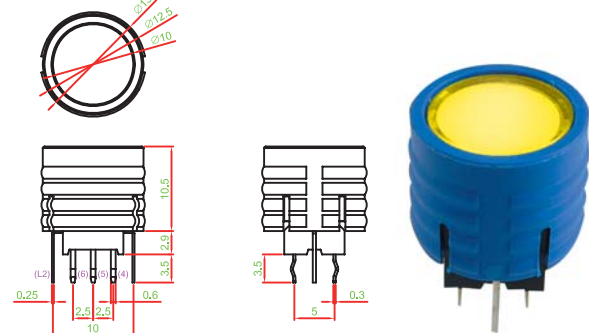


PS004-N22NRXXX□□□□

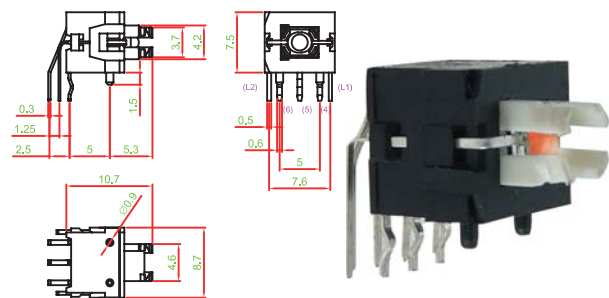




► DIMENSION


PS004-N22NRS1XT□□□□

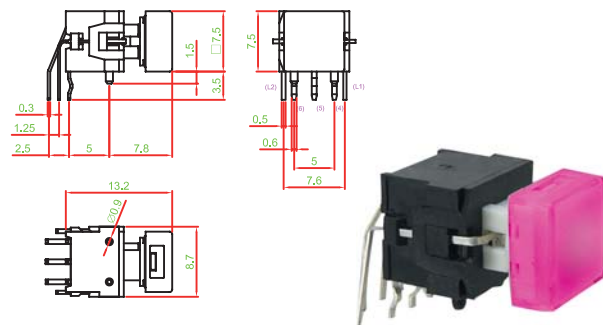


PS004-N22NRS1KT□□□□

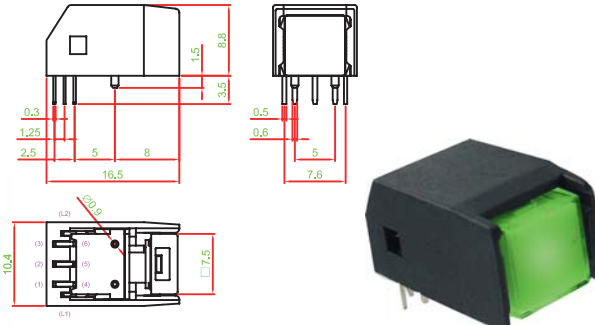


PS004-N22NR1S1XT□□□□

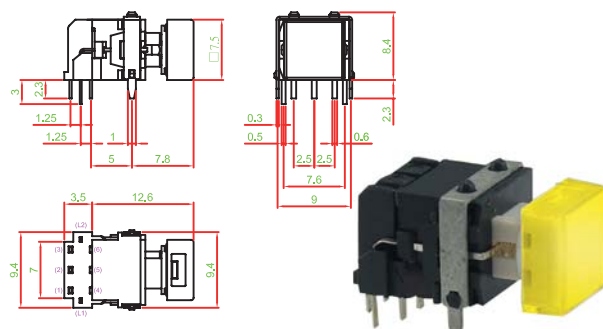


PS004-N22NR2S1KT□□□□

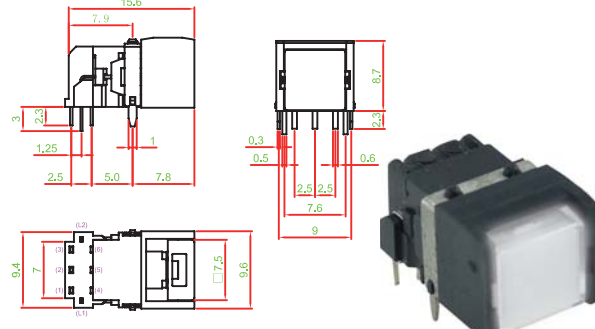


PS004-N22NR3S1KT□□□□

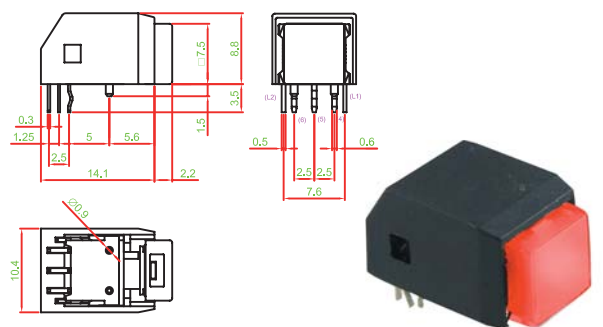

PS004-N22NR4S1XT□□□□

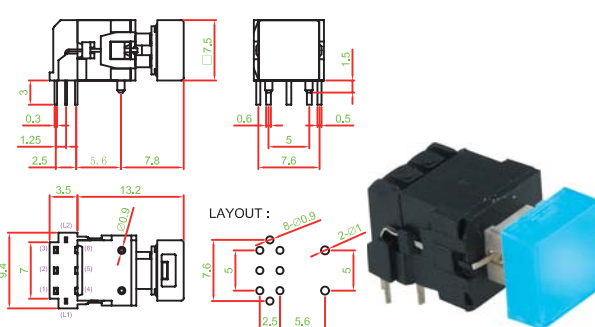


► CIRCUIT DIAGRAM




► P.C.B. LAYOUT

STANDARD TYPE



RIGHT ANGLE TYPE



► MATERIAL

- FRAME : PA + GF
- ACTUATOR : PA + GF
- BASE : PA + GF
- TERMINAL : BRASS ; SILVER PLATING
- SPRING : STAINLESS STEEL



	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
A	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
B	A	B	C	D	E	F	G	H	I	J	CH5	CH6	DSK	PIP	C-KEY	CUT	TAKE	REC	ENG	PROG
C	K	L	M	N	O	P	Q	R	S	T	REPLAY	RET1	RET2	KEY ON	AUTO TAKE					
D	U	V	W	X	Y	Z	POWER	ON OFF	ON	OFF		USER A	USER B	USER C	USER D	USER E	USER F	USER G	USER H	USER I
E	OK		Auto	Enter	Start	STOP	OPEN	CLOSE	Exit	Move	USER J									
F	SET	Reset	Light	Alarm	Menu	Next	Back	Delete	Motor	Save										
G	Up	Down	Right	Left	Test	End	Insert	Lock	Print	+/-										
H	ESC	BC.	HOME	Health	D-LED 2	OC GENIE	VIDEO INPUT	clr CMOS	Green Power	Save OK										
I	B/R +	Undo Cancel	T/L -	F1	F2	F3	F4	F5	F6	F7										
J	F8	F9	F10	F11	F12	F13	F14	IN 1	IN 2	IN 3										
K	IN 4	IN 5	IN 6																	
L	+	-	x	+	=	↑	→	▲	▶	▶▶										
M																				
N	↑	→	▲	◀	▶	◀	▶	◀	▶	◀										
O																				
P																				
Q	ME3	ME4	BGND 3D DVE1	BGND 3D DVE2	BUS COLOR	ME BUTTON LINK	*	INSERT	WIPE											
R	⏮	ALL		VP		COPY		RECORD MODE	↑											
S			MUTE																	
T			group																	
U			chair																	
V			OC			CLEAR	CROSS WIND	AMMO TEMP	BARO PRESS	AIR TEMP										
W	BORE-SIGHT	CANT	LEAD	RANGE	MRS	ZERO	TEST	UD	LR											
X	ID	Disp	MF	GALL		BAND	SETUP	MODE	LINK	FUNC.										
Y	SHIFT					DEL														
Z				RUN	2D	3D	CH1	CH2	CH3	CH4										



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Well Buying:

[PS004-L22NPR2CBKH5UBXX-1](#) [PS004-N22NRS1XTUWXX](#)