


XKB

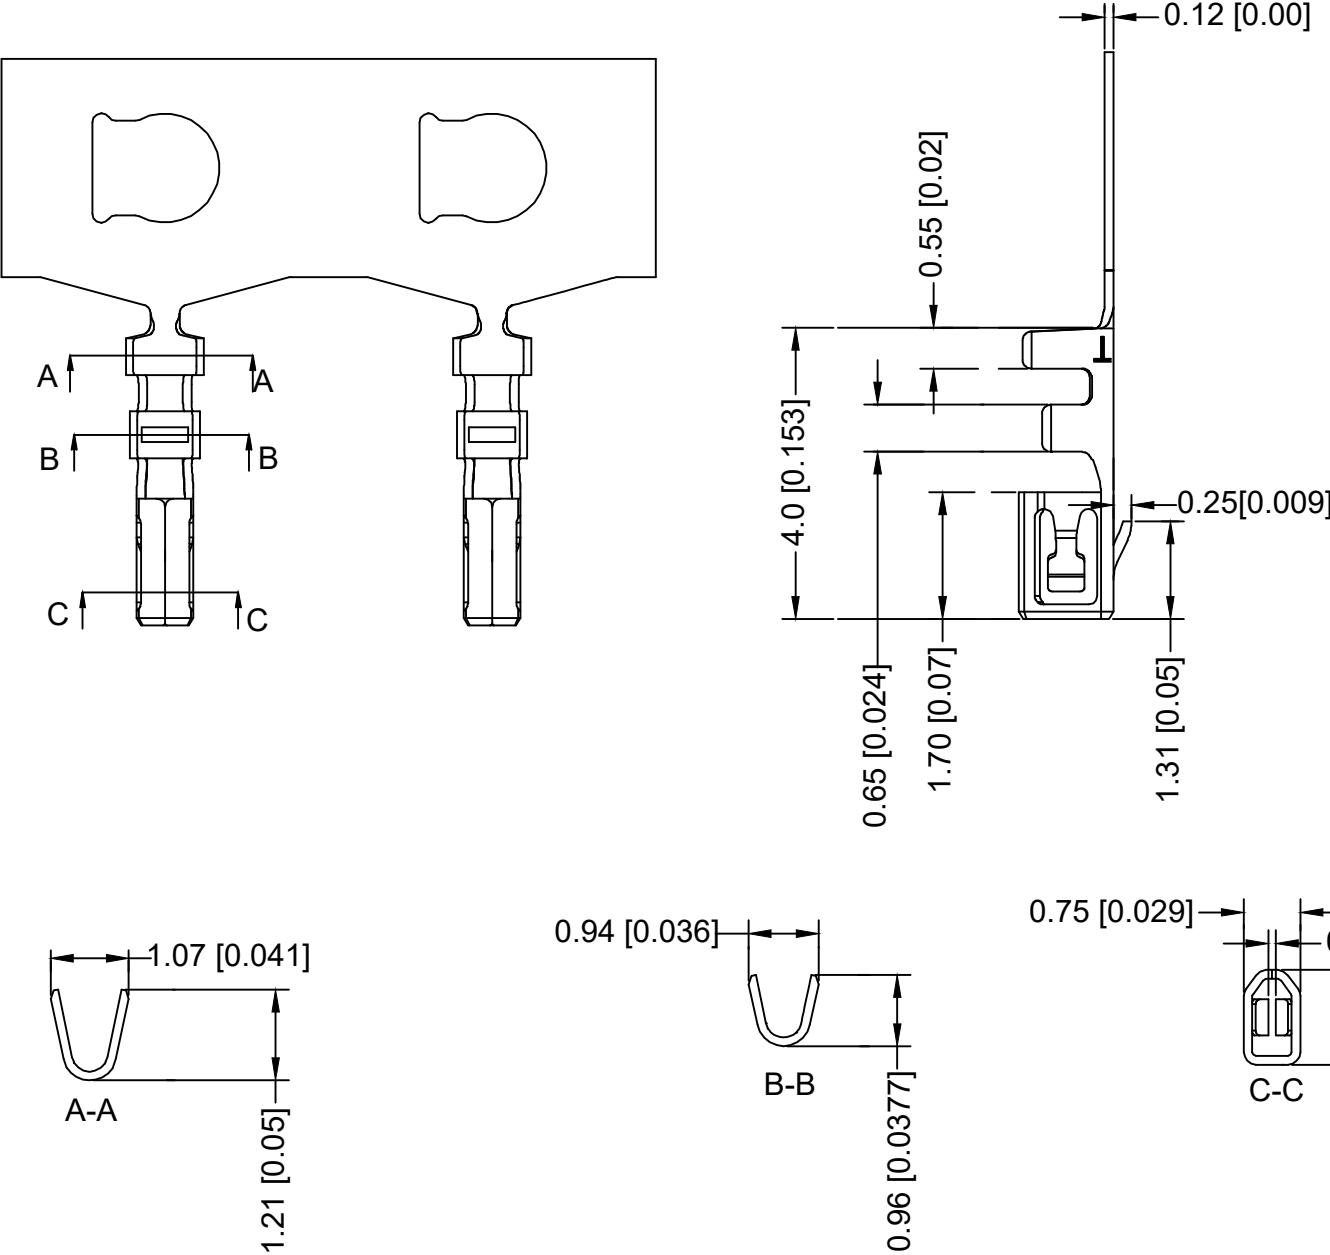

Specifications:
规格:
Voltage rating:50V AC/DC
额定电压: 50V AC/DC
Current rating:1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:250V AC/minute
耐受电压: 250V AC/分钟
Temperature range:-25℃-+85℃
温度范围: -25℃-+85℃
Insulation resistance:≥100MΩ MIN
绝缘电阻: ≥100MΩ XKB
Contact resistance:20mΩ MAX
接触电阻: ≤20mΩ
Applicable wire Range:AWG#28-#32
使用线范围: AWG #28-#32

X1004 T-P XX- A
① ② ③ ④ ⑤

- 1.Series No.
- 2.Category:T-Terminal
- 3.Material:P-Phosphor bronze
- 4.Plating Style;
V01-All Gold Flash
SN-Bright tin Plating 80u";
120u" Over Nickel
- 5.TYPE:A

XKB							DSND		DATE		SCALE: N/A	MODEL TYPE:
Δx				XKB	ANGULAR	±5°	DWN		DATE		VIEW:	PART NO.:
Δx					L≤4	±0.2	CHKD		DATE		UNIT: mm/in	X1004T-PXX-A
Δx					4<L≤16	±0.3	APPD		DATE		SIZE: A4	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16<L≤63	±0.4						X-X1004T-PXX-A
					L>63	±0.5						WEIGHT
					UNSPECIFIED TOLERANCES							1.0g
												SHEET
												1/1
												REVISION
												A0