

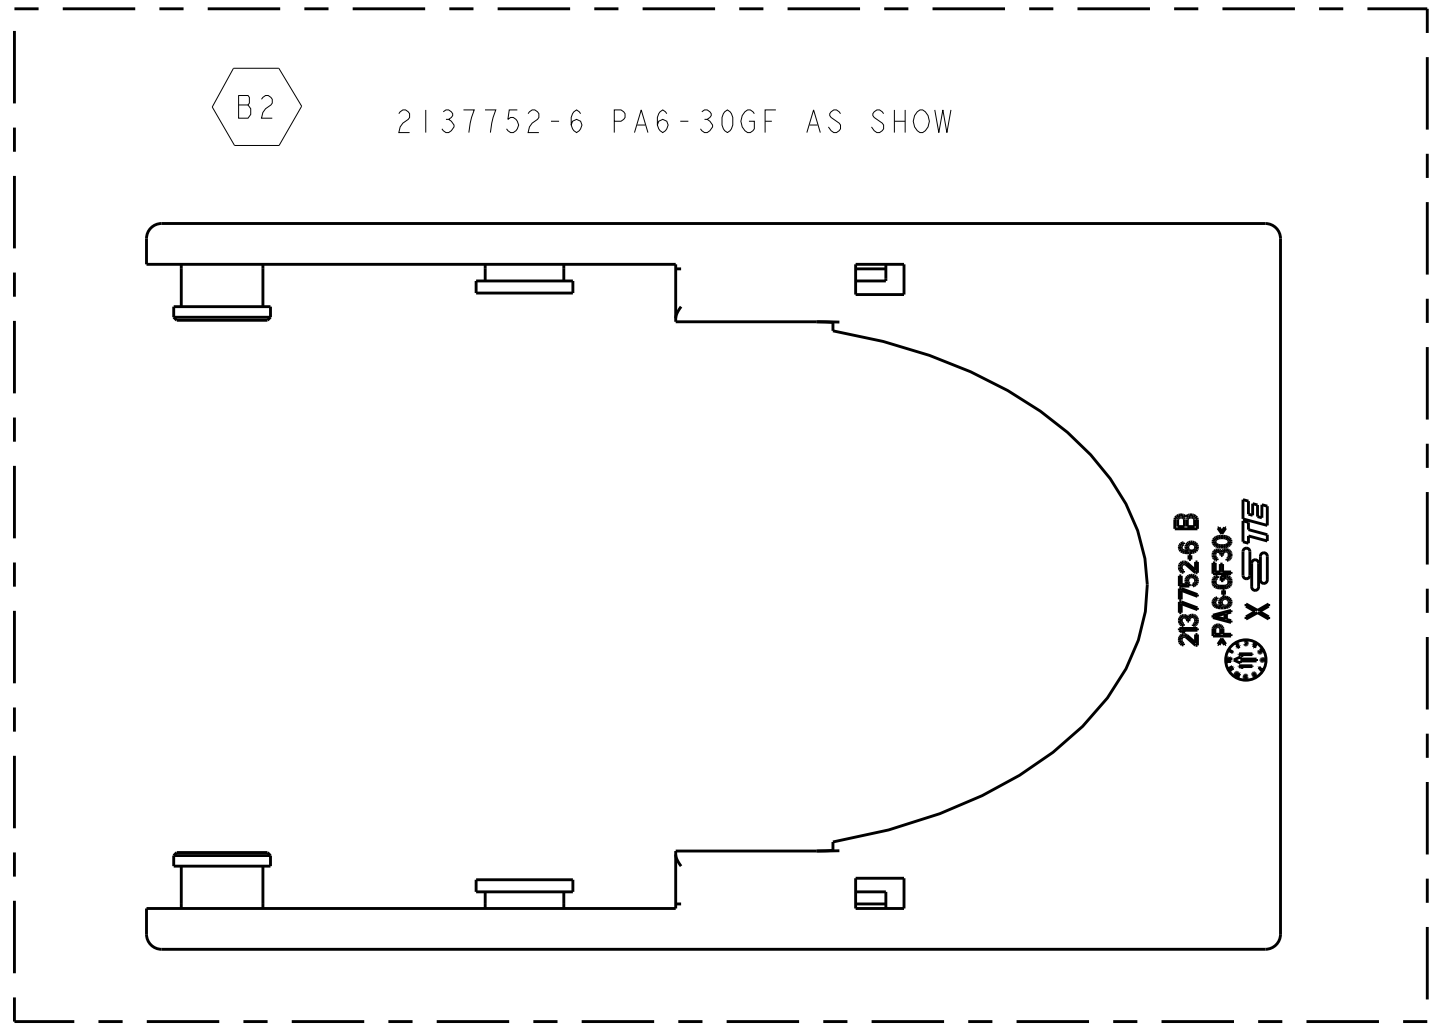
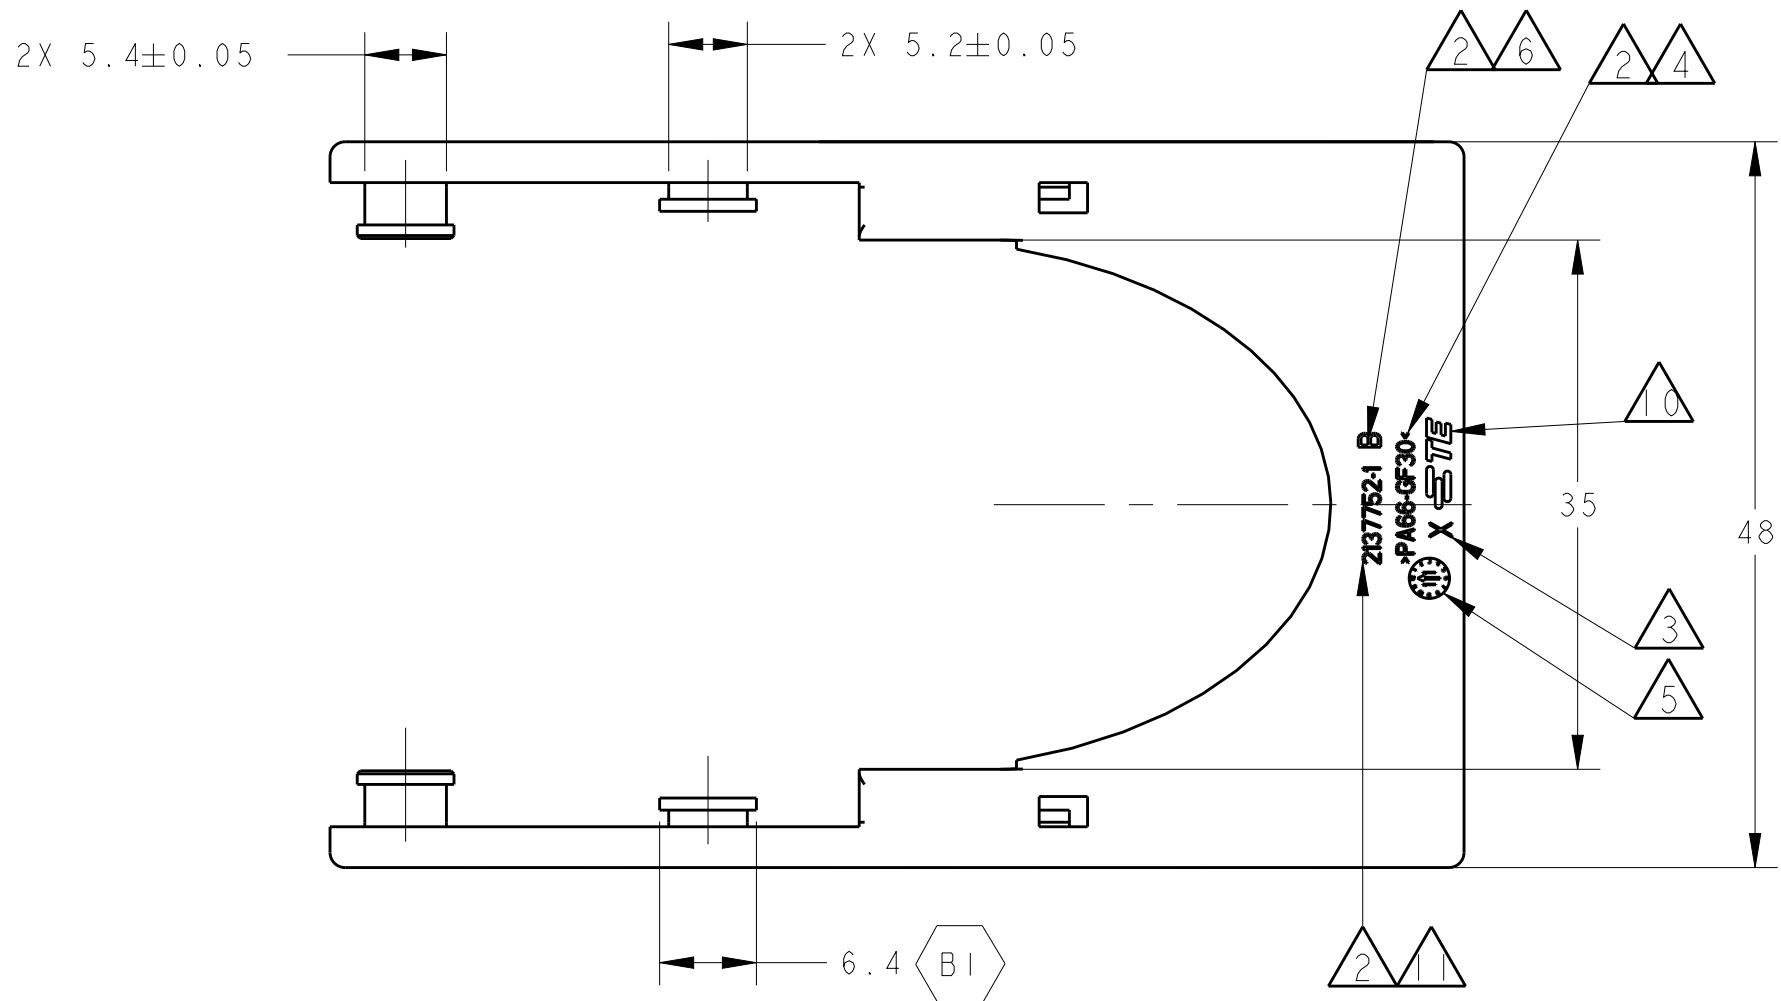
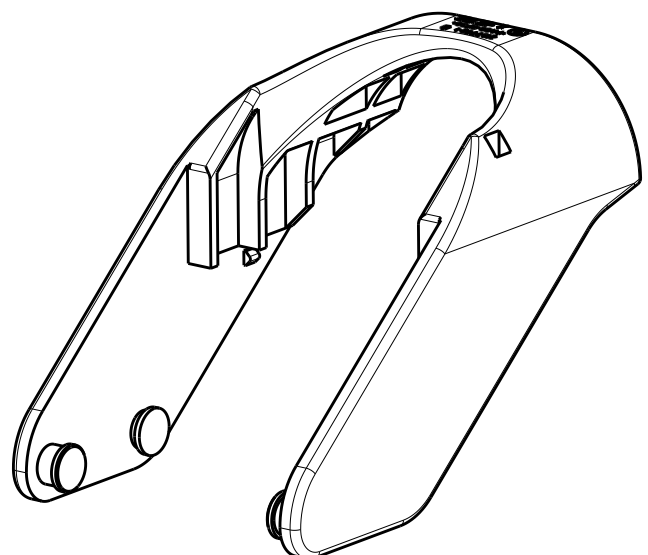
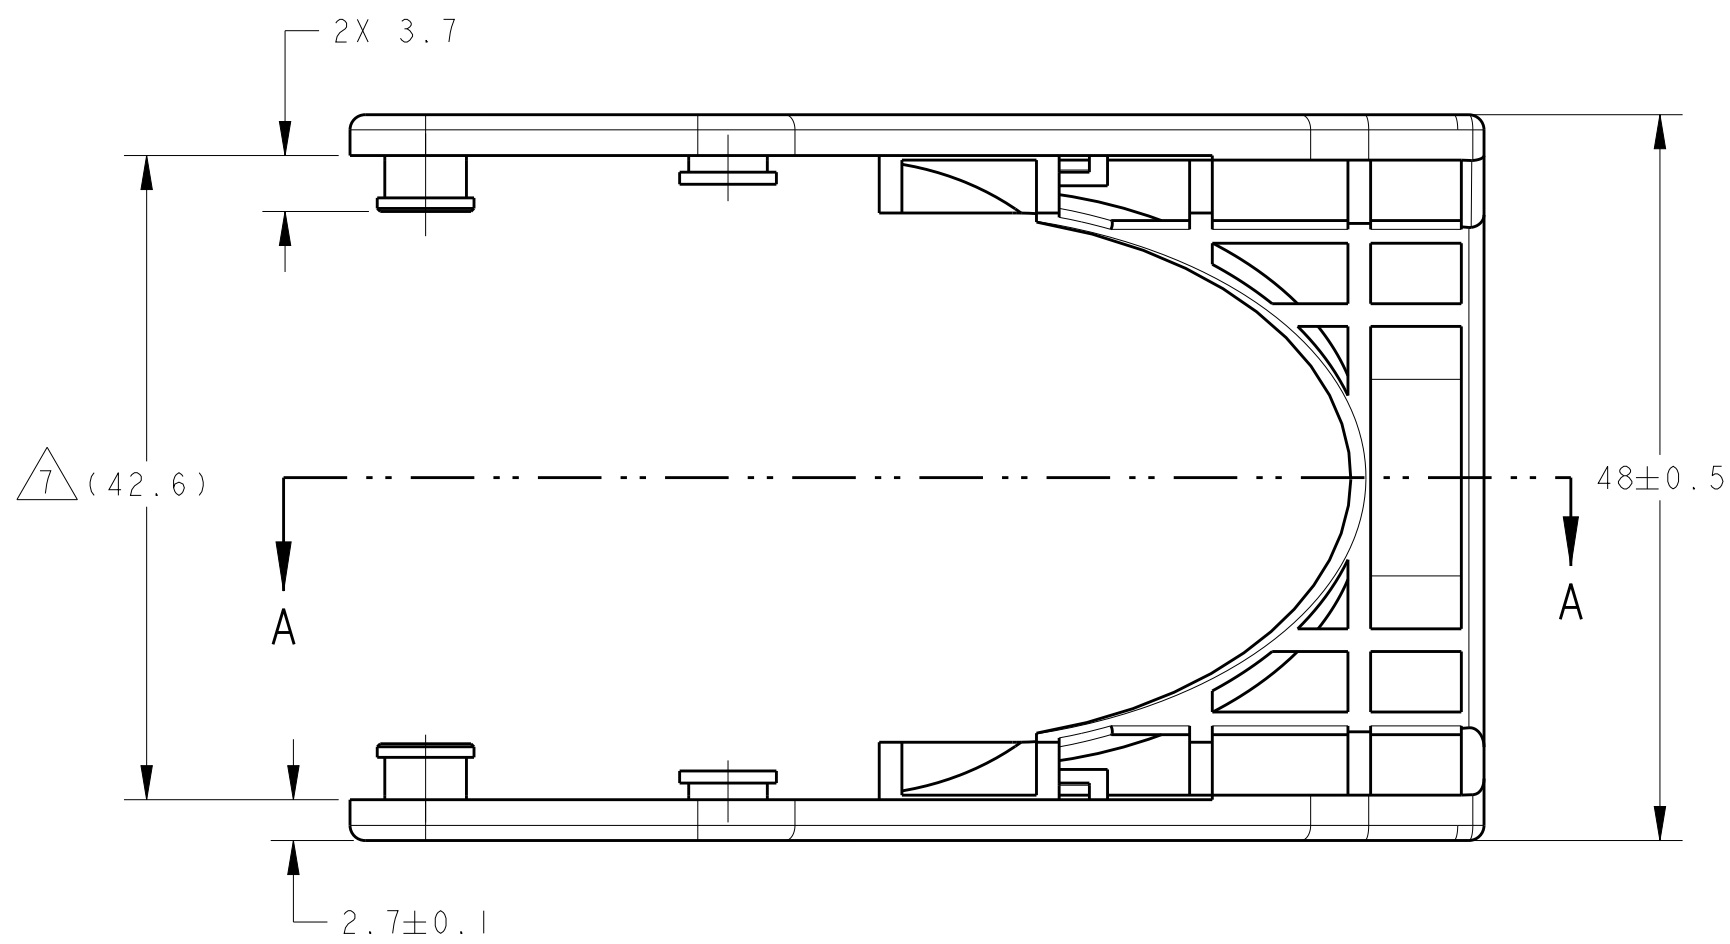
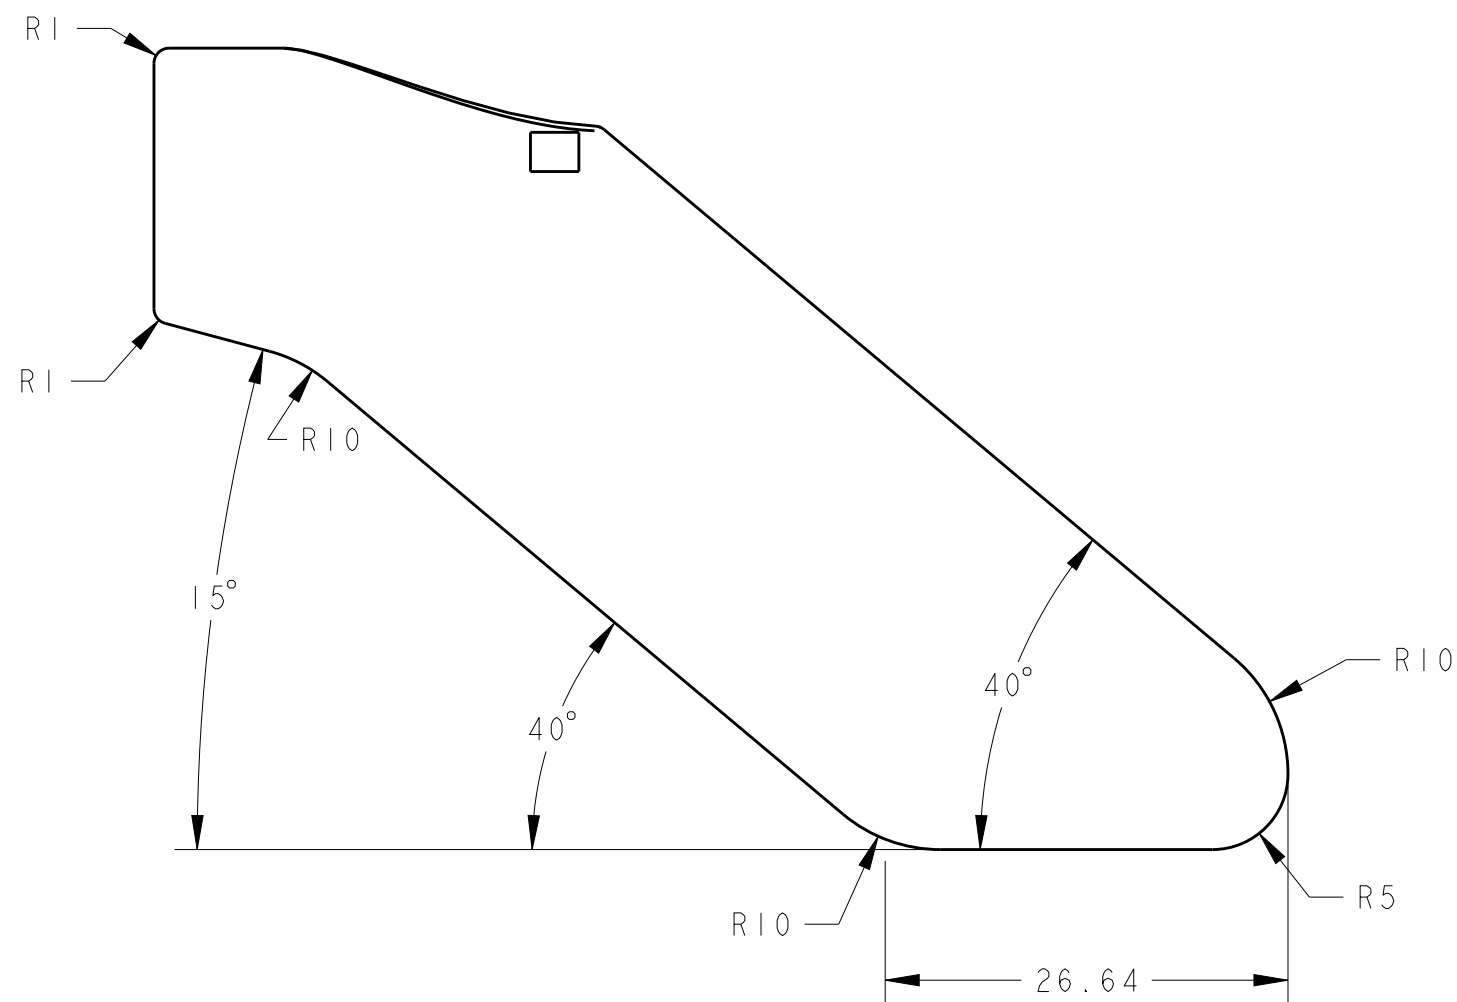


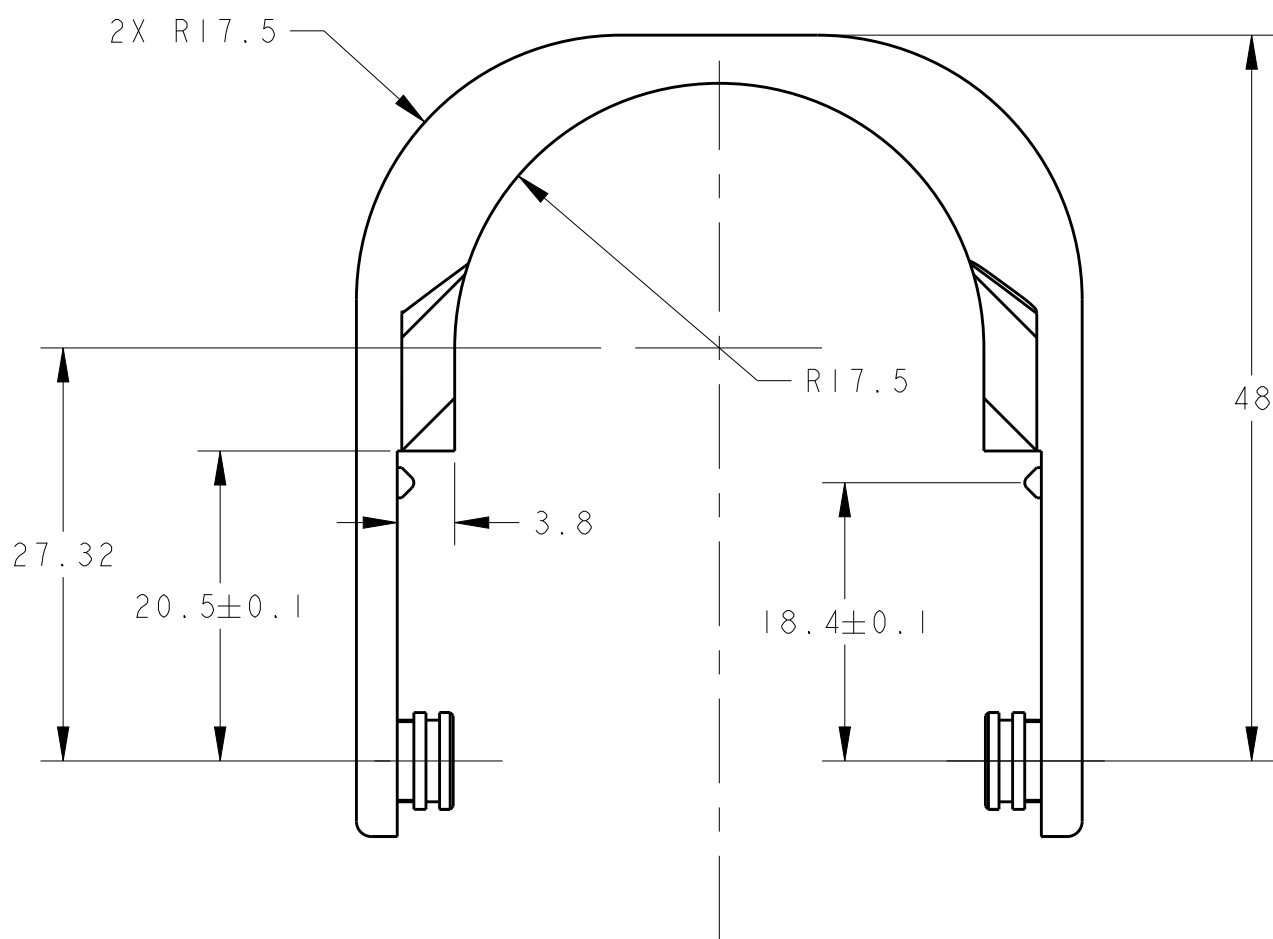

- Notes
- CHARACTERS ACC. TO DIN 1451-H1.5, CHARACTERS 0.15 RAISED, 0.2 SINK AROUND
 - EXCHANGEABLE
 - CAVITY MARKING:
 - MATERIAL MARKING ACC. TO VDA 260
 - DATE OF PRODUCTION WITH DATE INSERT Ø4, RECEDE
 - LETTER INSERT FOR THE REVISION STATUS OF THE MOULD ACTUAL STATUS SEE TABLE
 - WARPAGE PERMITTED MAX. -1mm
 - EXTERNAL SURFACE ACC. TO VDI 3400/27
 - ALL SHARP EDGES 0.1 BROKEN/RONDED
 - LOGO 1621426-6, ACC.TE SPEC TEC-202-36
 - TE P/N

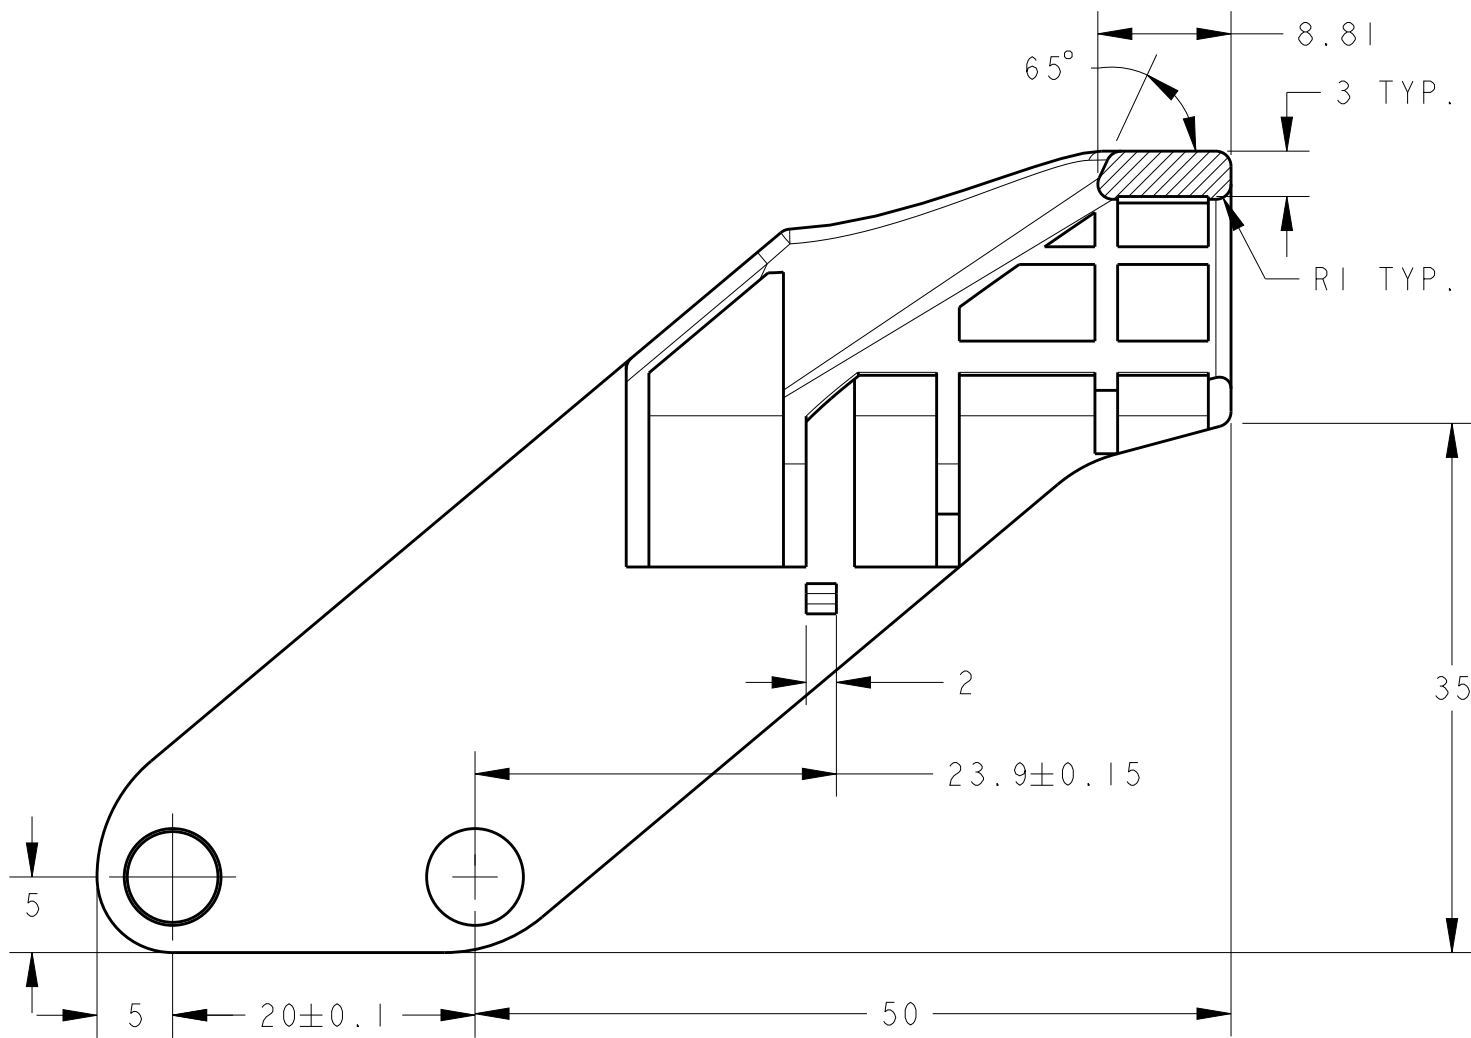

SCALE 1:1

B2	2137752-6	B	BLACK	PA6-GF30	2
	2137752-1	B	BLACK	PA66-GF30	1
	PART NO.	REV.	COLOR	MATERIAL	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. YU 20JUN11	TE Connectivity		
DIMENSIONS:		CHK W. YUAN 10AUG11	NAME		
mm		APVD W. YUAN 10AUG11	LEVER FOR RECEPTABLE HOUSING		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	154P ECU CONNECTOR		
0 PLC ±0.2		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO		
1 PLC ±0.5			A100779C=2137752		
2 PLC ±0.13			RESTRICTED TO		
3 PLC ±0.013			SCALE 1:1 SHEET 1 OF 1 REV B2		
4 PLC ±0.001					
ANGLES FINISH					
MATERIAL					
FINISH					
WEIGHT					
CUSTOMER DRAWING					