

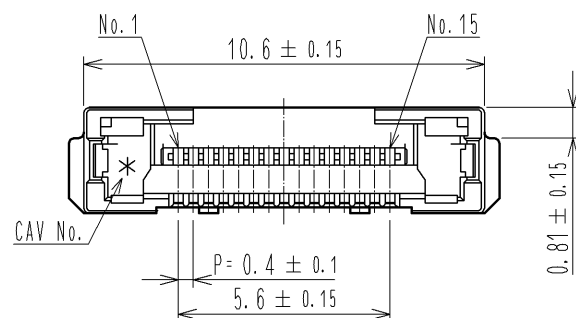
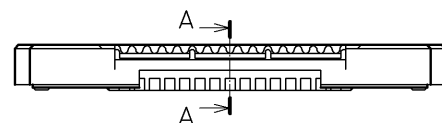
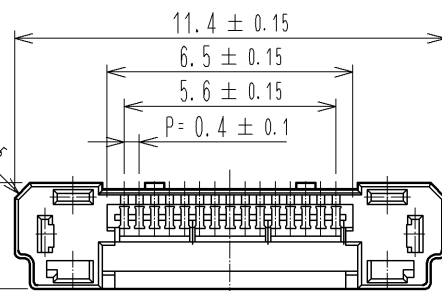



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

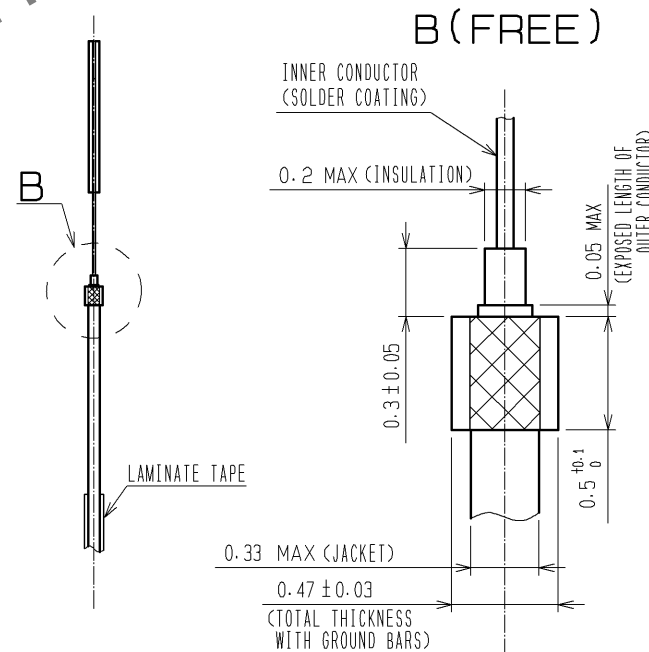


RECOMMENDED CABLE SUBASSEMBLY

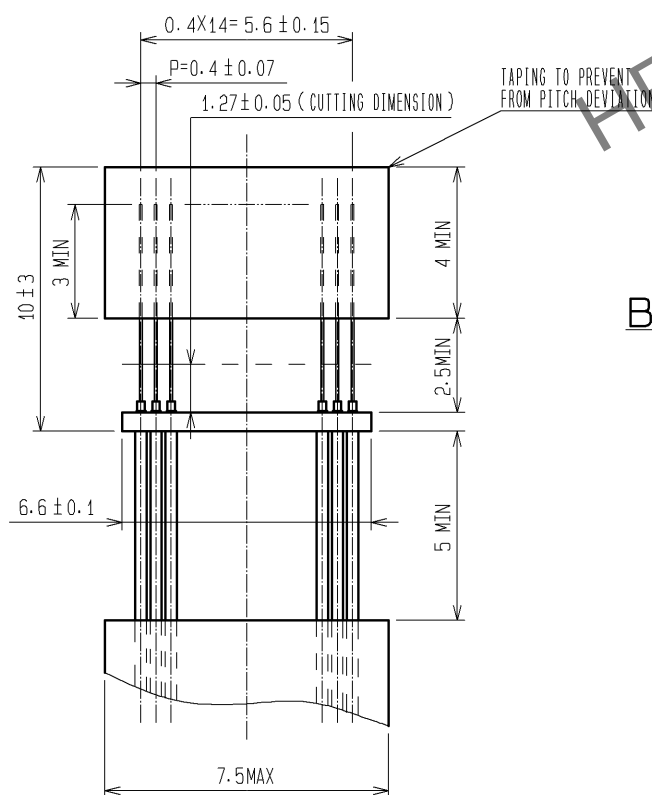

A-A(FREE)

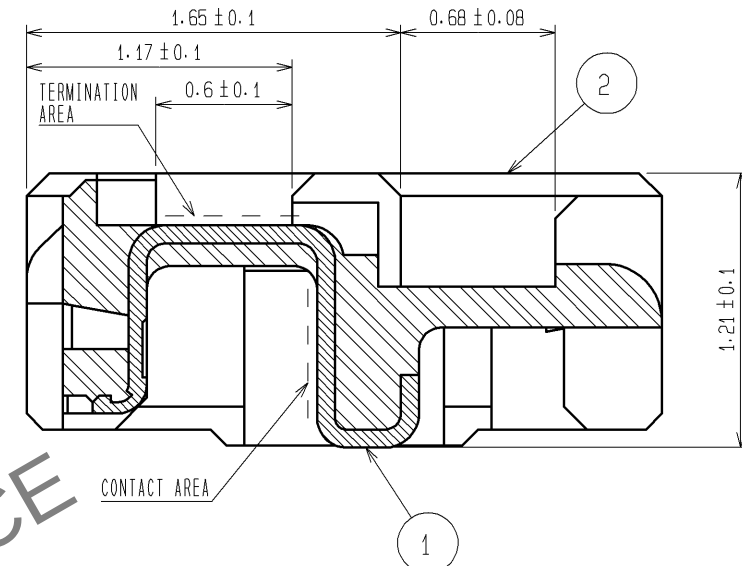


CABLE TERMINATION FIGURE (FREE)

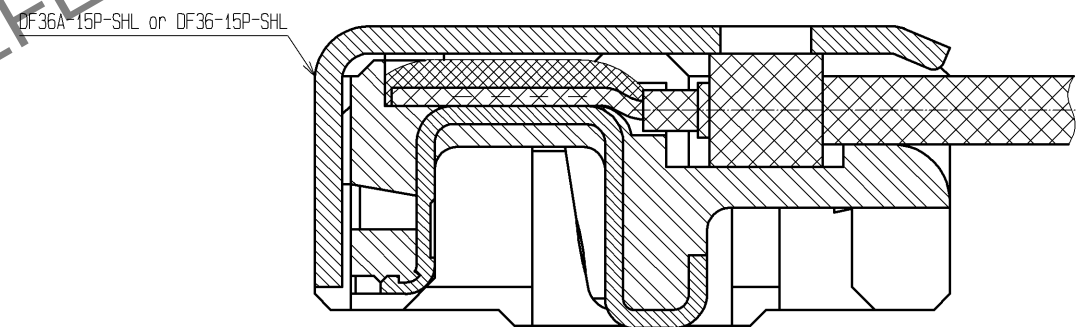

- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS *CONNECTOR UNIT AND METAL SHIELDING*. REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No. APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR. USE DF36A-15P-SHL FOR DF36A-15S-0.4V(**), USE DF36-15P-SHL FOR DF36-15S-0.4V(**).

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36C-15P-0.4SD(55)	CL662-4035-2-55
-	METAL SHIELDING	DF36A-15P-SHL	CL662-4511-7-00
-	METAL SHIELDING	DF36-15P-SHL	CL662-4526-1-00

4. BLACK MARKS MAY OCCASIONALLY OCCUR IN MOLD RESIN, YET THEY NOT AFFECT CONNECTOR QUALITY.

2	LCP	UL94V-0・BEIGE	5	PS	BLACK			
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.1μm min	4	POLYESTER	CLEAR			
		TERMINATION AREA : GOLD PLATING 0.1μm min	3	PS	CLEAR			
UNDER PLATING : NICKEL PLATING 1μm min								
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : MH. YAMANE	14.05.27	DRAWING NO.	EDC3-320250-02				
	CHECKED : MH. TSUCHIDA	14.05.27	PART NO.	DF36C-15P-0.4SD(55)				
	DESIGNED : AH. MIYAZAKI	14.05.26	CODE NO.	CL662-4035-2-55				
	DRAWN : AH. MIYAZAKI	14.05.26		1/1				

