



2 DI 24 V DC COM Control Module for ET200S High Feature Starter for ET 200S Failsafe Starter for local input functions with COM interface for PC cable 6ED1057-1 AA00-0BA0

Figure similar

Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Ambient conditions	
ambient temperature	
• during operation	-40 ... +80 °C
• during storage	0 ... 60 °C
Approvals Certificates	
General Product Approval	EMV



EG-Konf.

[Confirmation](#)



UL




RCM

other	Environment
<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

Further information

- Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1903-0CH10>
- Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-0CH10>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0CH10>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1903-0CH10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-0CH10&lang=en)

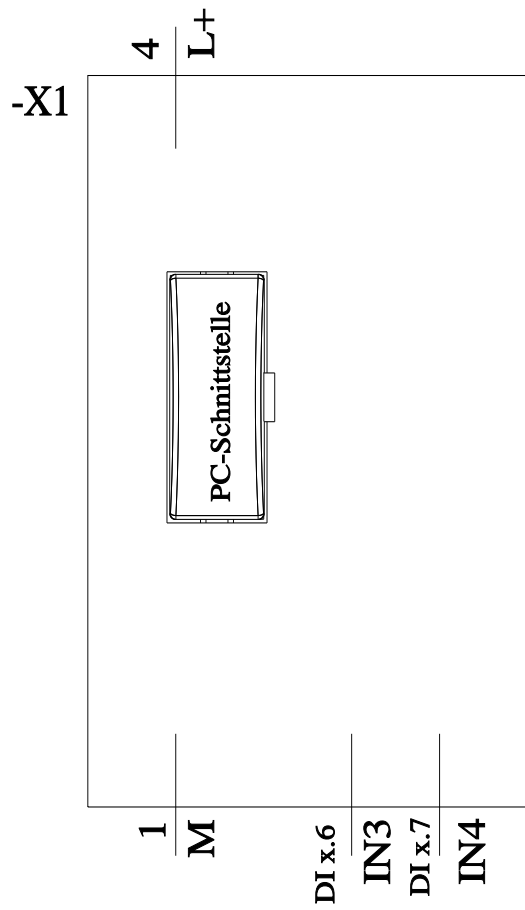

last modified:

3/11/2024 ↻