

1415337

https://www.phoenixcontact.com/us/products/1415337

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 5-position, Pin, straight, M12, coding: L, Rear mounting, M16 x 1.5, Solder pins, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239090

### Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- · Mechanical tightening limitation for long-term-stable gasket

#### Commercial data

Item number	1415337
Packing unit	20 pc
Minimum order quantity	20 pc
Sales key	AB26
Product key	ABQEGN
GTIN	4055626055787
Weight per piece (including packing)	18.455 g
Weight per piece (excluding packing)	18.455 g
Customs tariff number	85366990
Country of origin	DE



1415337

https://www.phoenixcontact.com/us/products/1415337

### Technical data

#### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Notes on operation	FE not connected to metal parts that can be touched, no protective function
Order information:	Lock nut is included in the scope of delivery

### Mounting

Mounting type	Rear mounting M16 x 1.5 With flat nut
Assembly note	With flat nut

### Product properties

Product type	Circular connectors (device side)
Sensor type	Power
Number of positions	5
Shielded	no
Coding	L
Thread type	M12

#### Data management status

Article revision	04

## Insulation characteristics

Overvoltage category	III
Degree of pollution	3

## Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

### Electrical properties

Rated surge voltage	1.5 kV
Nominal voltage U <sub>N</sub>	63 V DC
Nominal current I <sub>N</sub>	16 A



1415337

https://www.phoenixcontact.com/us/products/1415337

#### Connection data

#### Conductor connection

Connection method	Solder pins
Contact connection type	Pin

### Mechanical properties

#### Mechanical data

	Insertion/withdrawal cycles	> 100

#### Connector

#### Connection 1

Head design	Pin
Head cable outlet	straight
Head thread type	M12
Coding	L

#### Cable/line

Signal type/category	Power
----------------------	-------

#### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)

### Standards and regulations

#### M12

Standard designation	M12 connector	
Standards/specifications	IEC 61076-2-111	
Note	In line with	




1415337

https://www.phoenixcontact.com/us/products/1415337

# Drawings

## Schematic diagram

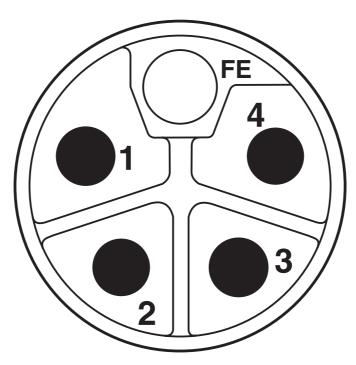

Pin assignment of M12 connector, 5-pos., L-coded, pin side view



1415337

https://www.phoenixcontact.com/us/products/1415337

# Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1415337

c <b>911</b> us	cULus Recogniz Approval ID: E46874	<b>JLus Recognized</b> proval ID: E468743-20180113				
		Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>	
		63 V	16 A	-	-	



1415337

https://www.phoenixcontact.com/us/products/1415337

## Classifications

#### **ECLASS**

	ECLASS-11.0	27440102	
	ECLASS-12.0	27440116	
	ECLASS-13.0	27440116	
ETIM			
	ETIM 9.0	EC002635	
UNSPSC			
	UNSPSC 21.0	39121400	



1415337

https://www.phoenixcontact.com/us/products/1415337

# Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	03d0a521-5aa4-4ff9-a2a6-1857d925bf84

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com