


SMD Power Inductor


CDRH4D18C



Dimension - [mm]

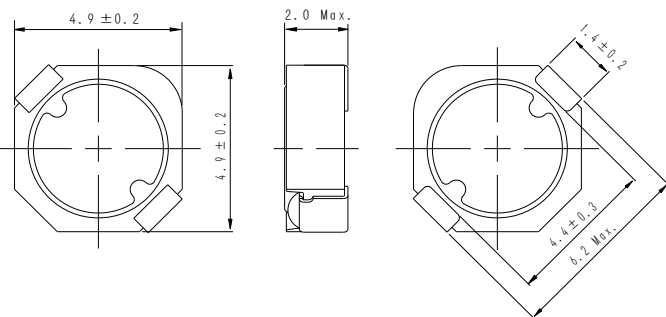

Land pattern and Schematics - [mm]

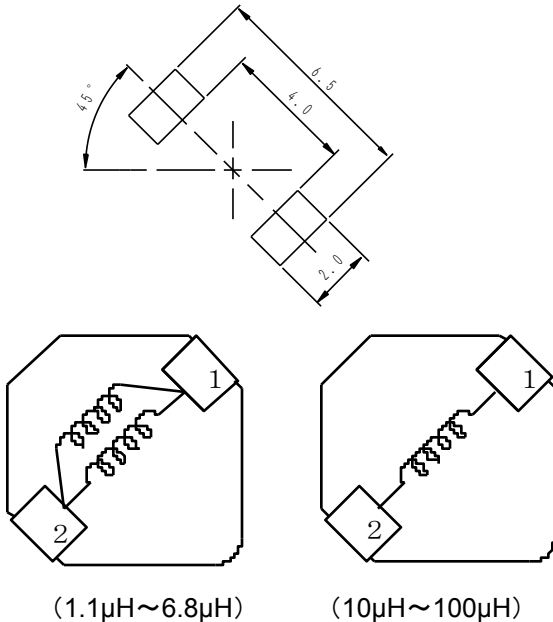

Description

- Ferrite drum core construction.
- Magnetically shielded.
- $L \times W \times H$: $5.1 \times 5.1 \times 2.0$ mm Max.
- Product weight: 135mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ (including coil's self temperature rise)
- Storage temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Solder reflow temperature: 260°C peak.

Packaging

- Carrier tape and reel packaging
- 7.0" diameter reel
- 1000pcs per reel

Applications

- Ideally used in Mobile phone, PDA, MP3, HDD, DSC/DVC, Note book PC, etc as DC-DC converter inductors.

SMD Power Inductor

CDRH4D18C



Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [within] ※1	D.C.R.(Ω) Max. (Typ.) (at 20°C)	Rated Current (A) ※2
CDRH4D18CNP-1R1PC	A	$1.1 \pm 25\%$	29m(23m)	2.4
CDRH4D18CNP-2R2PC	B	$2.2 \pm 25\%$	39m(31m)	1.7
CDRH4D18CNP-3R0PC	C	$3.0 \pm 25\%$	61m(49m)	1.5
CDRH4D18CNP-4R7PC	D	$4.7 \pm 25\%$	110m(88m)	1.15
CDRH4D18CNP-6R8PC	E	$6.8 \pm 25\%$	125m(100m)	1.05
CDRH4D18CNP-100PC	F	$10 \pm 25\%$	156m(125m)	830m
CDRH4D18CNP-150PC	G	$15 \pm 25\%$	194m(155m)	700m
CDRH4D18CNP-220PC	H	$22 \pm 25\%$	323m(258m)	600m
CDRH4D18CNP-330PC	I	$33 \pm 25\%$	550m(440m)	460m
CDRH4D18CNP-470PC	J	$47 \pm 25\%$	783m(626m)	410m
CDRH4D18CNP-680PC	K	$68 \pm 25\%$	1.16(925m)	305m
CDRH4D18CNP-101PC	L	$100 \pm 25\%$	1.51(1.21)	250m

※1. Inductance measuring condition: at 100kHz.

※2. Rated current: The DC current at which the inductance decreases to 65% of its nominal value or when $\Delta t=40^\circ\text{C}$, whichever is lower ($T_a=20^\circ\text{C}$).













SMD Power Inductor

CDRH4D18C



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

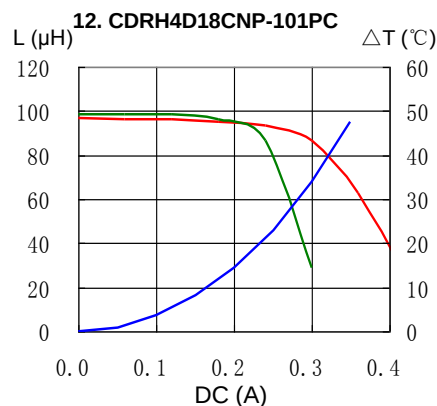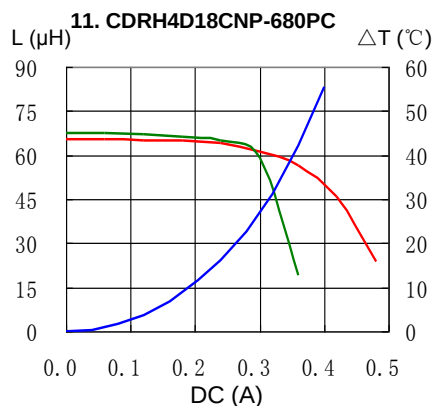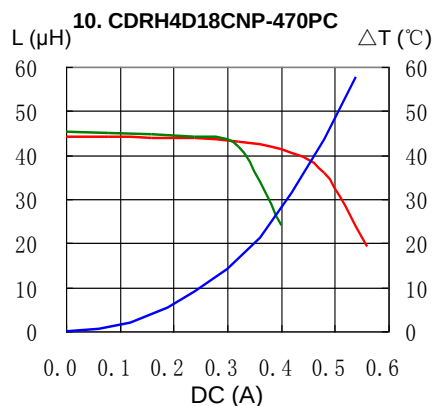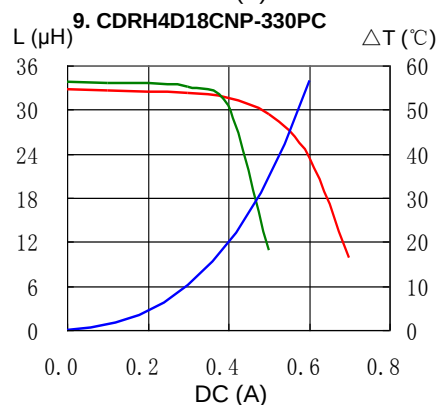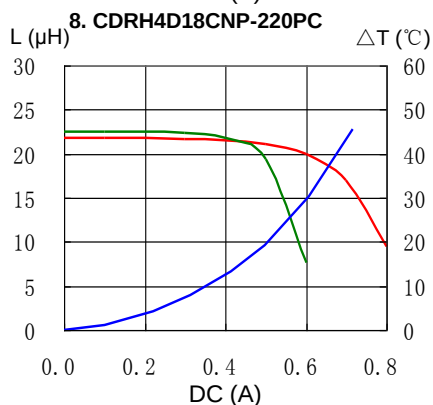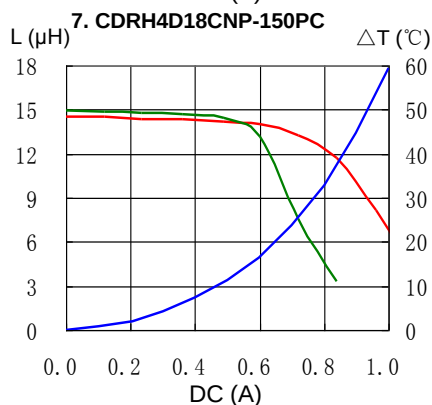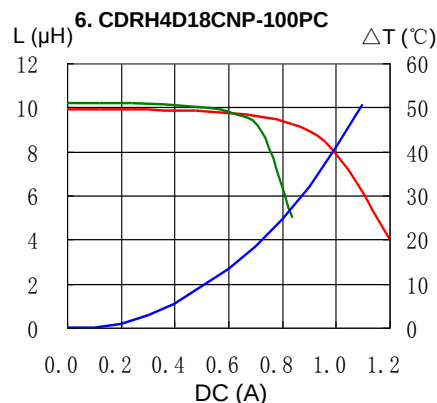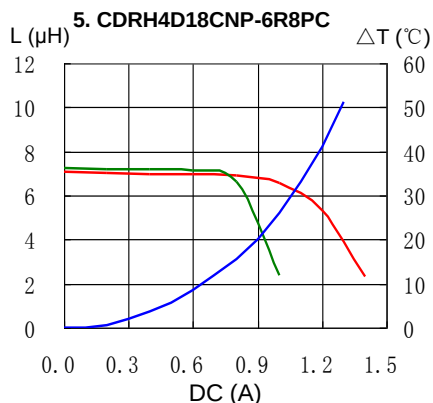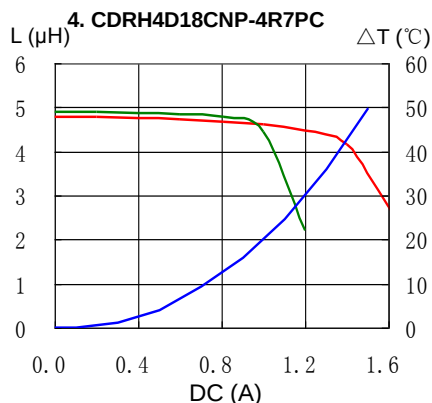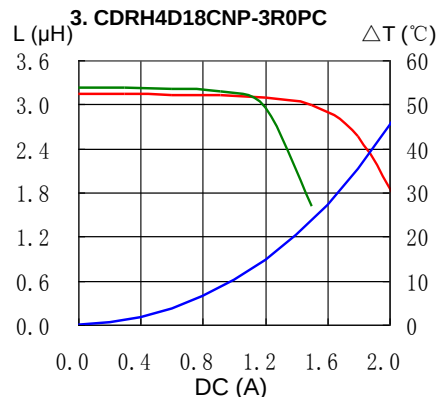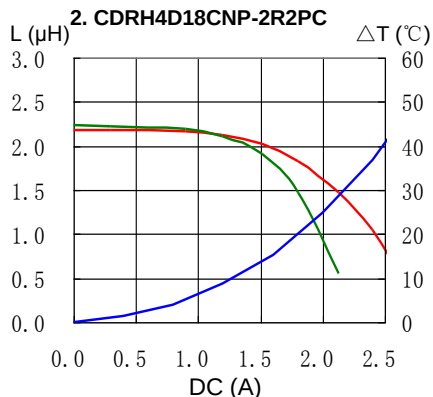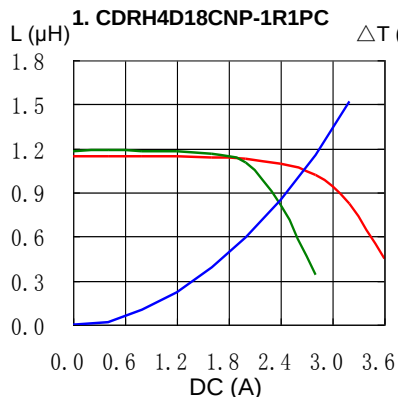


SMD Power Inductor CDRH4D18C




Solder Reflow Condition

Heat Endurance

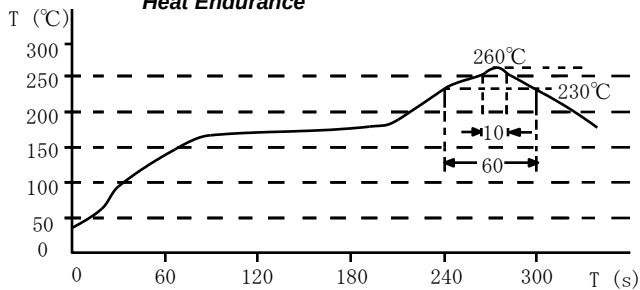

Temperature Chart

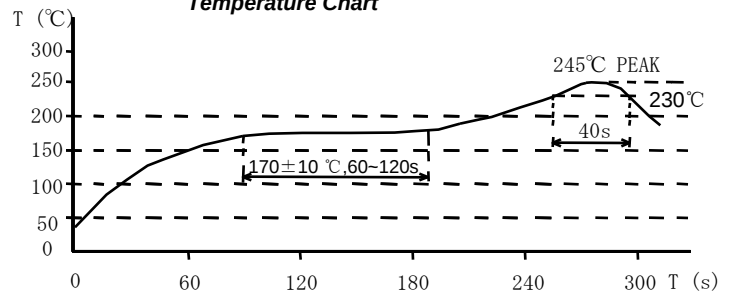

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

[CDRH4D18CNP-100PC](#) [CDRH4D18CNP-220NC](#) [CDRH4D18CNP-101NC](#) [CDRH4D18CNP-1R1NC](#)
[CDRH4D18CNP-100NC](#) [CDRH4D18CNP-680NC](#) [CDRH4D18CNP-6R8NC](#) [CDRH4D18CNP-4R7NC](#)
[CDRH4D18CNP-150NC](#) [CDRH4D18CNP-330NC](#) [CDRH4D18CNP-2R2NC](#) [CDRH4D18CNP-470NC](#) [CDRH4D18CNP-3R0NC](#)