


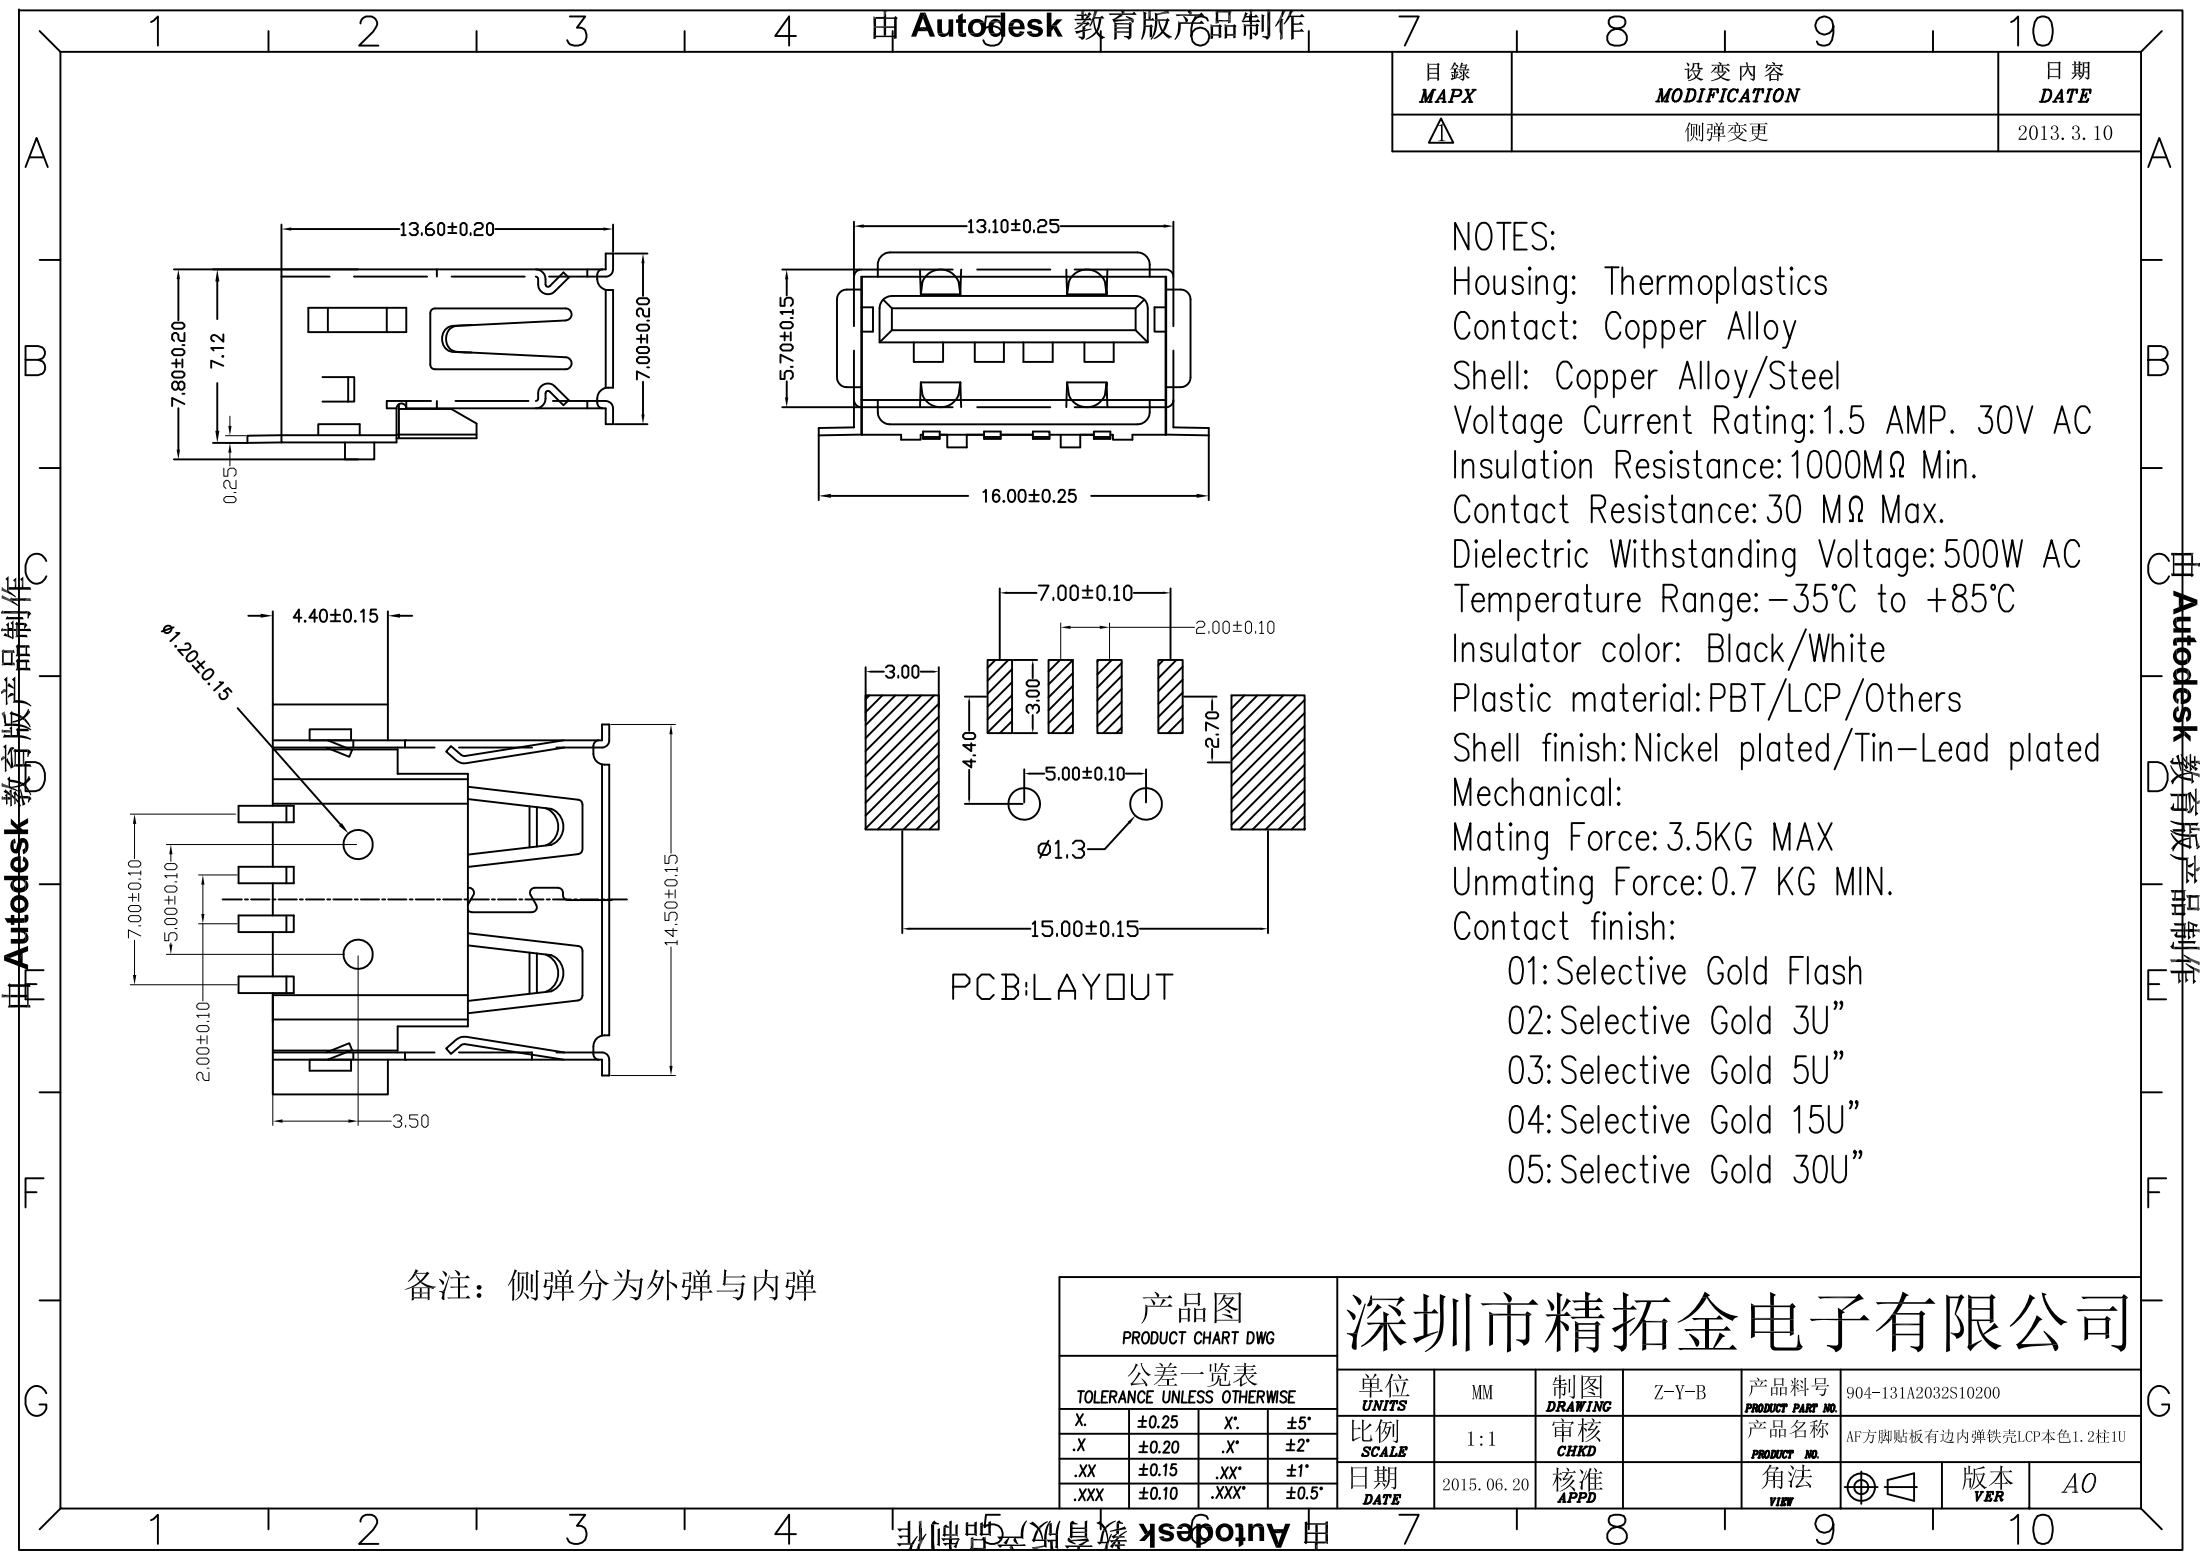

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35℃ to +85℃

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B
X.	±0.25	X'	±5°	比例 SCALE	1:1	审核 CHKD	产品料号 PRODUCT PART NO.
.XX	±0.20	.X'	±2°	日期 DATE	2015. 06. 20	核准 APPD	产品名称 PRODUCT NO.
.XX	±0.15	.XX'	±1°				角法 VIEW
.XXX	±0.10	.XXX'	±0.5°				版本 VER
							A0