


Actuator

51-
152.0262

Distribution by
DigiKey

DigiKey

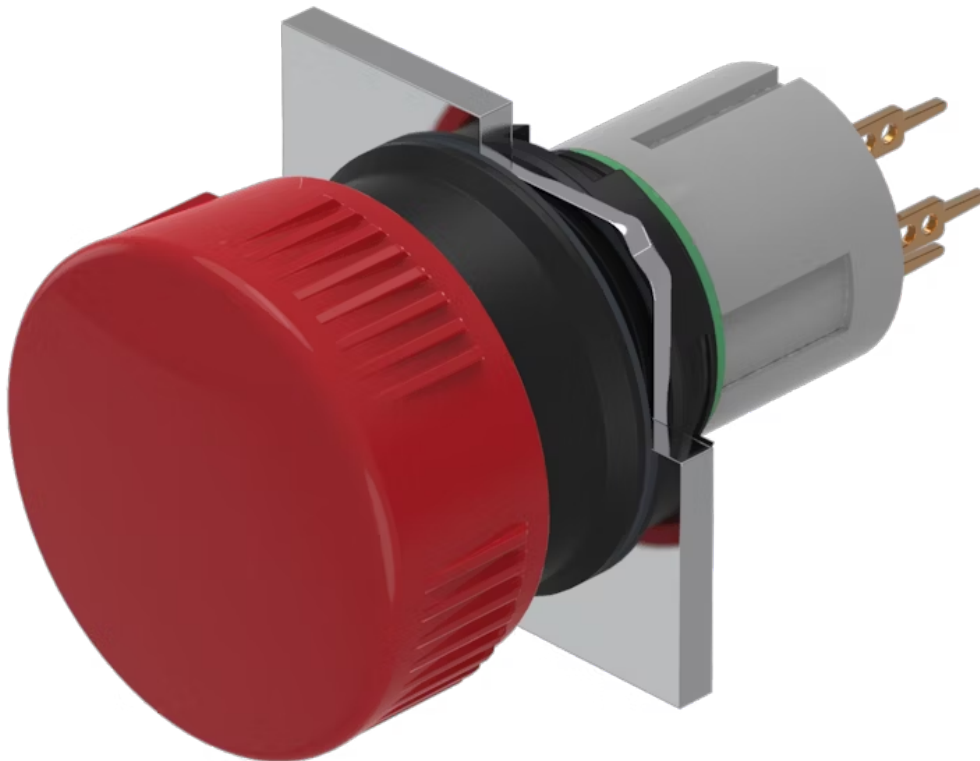

<https://digikey.eao.com/p/51-152.0262>

Your product:



51-152.0262 Actuator

FRONT

Front dimension:	Ø 24,5 mm
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens material:	Plastic
Lens colour:	Red
Lens optics:	opaque
Lens shape:	mushroom-head

ELECTRICAL CHARACTERISTICS

Electric strength:	2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15
Contacts:	2 NC
Switching voltage and switching current:	100 mA at 42 VAC/VDC

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.5 Nm
Operating force:	

4 N ... 6 N

Contact material: Gold

Switching system: This low-level switching element was designed for switching low powers in electronic circuits. The mechanism assures reliable switching of loads ranging from a few $\mu\text{A}/\mu\text{V}$ up to 100 mA/ 42 VAC/DC.
Single-break momentary contact, as normally open or normally closed with 4 independent points of contact. 2 momentary contacts per switching element; combination of normally open and normally closed is possible.
Special features are the long life, extremely short rebound time and stable contact resistance.

Terminal: Universal terminal, 2 x 0.5 mm

Operating Travel: 3 mm

Mechanical lifetime: 5 Mio. cycles of operation

Weight: 0.008 kg

Switching system: Low-level element

Switching action: Momentary

AMBIENT CONDITION

Storage temperature: – 40 °C ... + 85 °C

IP front protection: IP65, according to DIN EN 60529

Operating temperature: – 25 °C ... + 55 °C

Shock resistance: 15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)


OTHER

Hints: If the anti-twist ring is not used the panel thickness increases to 4 mm


Short Description: Actuator, Ø 24,5 mm, mushroom-head, non illuminative, Red, Plastic, opaque, Black, Plastic, 2 NC, Momentary, Universal terminal, 2 x 0.5 mm, IP65, according to DIN EN 60529

Housing colour: Black


Wiring diagrams:

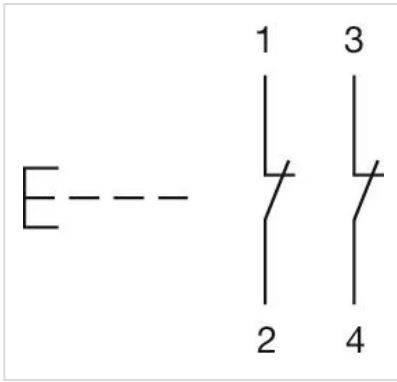

Mounting cut-outs:

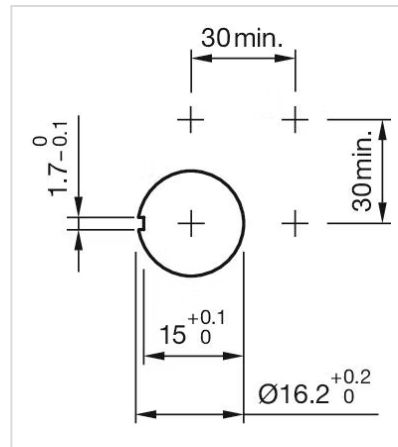

Dimension drawings:

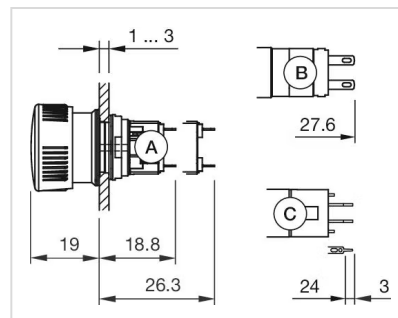

A = Solder terminal
 B = Plug-in terminal 2.8 mm x 0.5 mm
 C = Universal terminal 2.0 mm x 0.5 mm