REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.08.03	阿 树

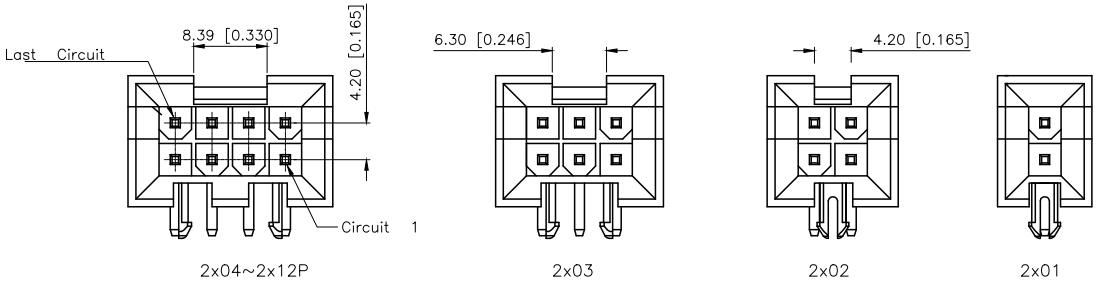

■SPECIFICATIONS
- Voltage rating:600V AC/DC
- Current rating:7A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:−45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:
X9357 W R−2xXX B−N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

① Series No
② Category:W−Wafer
③ Welding Board angle:R−Stright 90°
④ Row No.Pin No:2xXX−2x01P−2x12P
⑤ Specal No:B−A rrange ushering with positioning column
⑥ Material:N0−PA66 UL 94V−0
⑦ Plating:SN−Tin plated

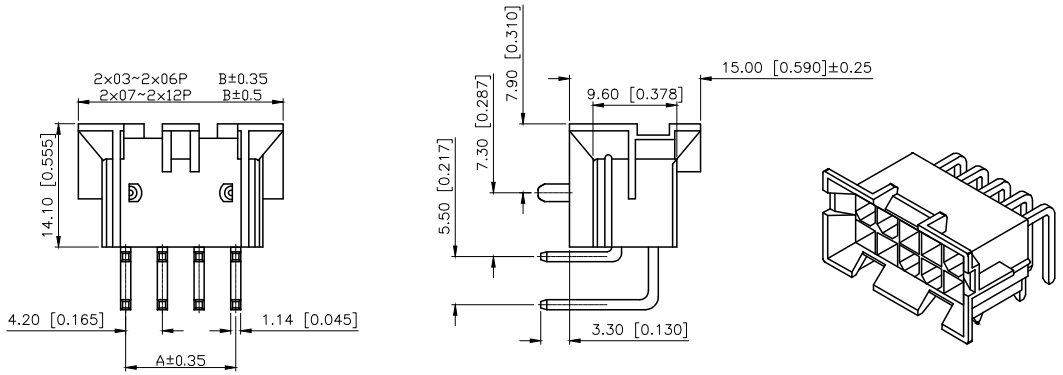

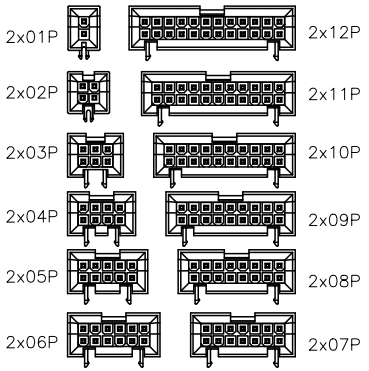

CIRCUIT SIZE LAYOUT

Poles	Dimensions(mm)	
	A	B
2x01	/	10.80
2x02	4.20	15.00
2x03	8.40	19.20
2x04	12.60	23.40
2x05	16.80	27.60
2x06	21.00	31.00
2x07	25.20	36.00
2x08	29.40	40.20
2x09	33.60	44.40
2x10	37.80	48.60
2x11	42.00	52.80
2x12	46.20	57.00

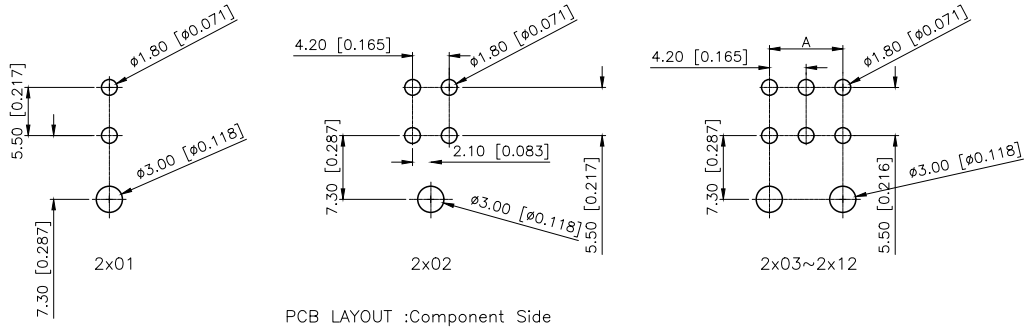

PCB LAYOUT :Component Side
Recommended PCB Thichness 1.78MAX

X9357WR−2xXXB−N0SN	PA66	Brass	X9357HM−B
PART NO	Material	Material(Pin)	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB

DESIGN	阿 树	VIEW:	MODEL TYPE: 4.20 mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9357WR−2xXXB−N0SN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1