Customer Information Sheet

IF IN DOUBT - ASK NOT TO SCALE DRAWING No.: M80-882XXXX THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

ORDER CODE: M80-882XXXX TOTAL No. OF CONTACTS: 02 - 07, 17, 22 FINISH:-22 = SELECTIVE GOLD + TIN/LEAD

45 = GOLD

42 = SELECTIVE GOLD / 100% TIN

SPECIFICATORS: MATERIAL: MOULDING = POLYAMIDE 46 UL94V-O. BLACK CONTACTS = PHOSPHOR BRONZE LATCHES = BERYLLIUM COPPER FINISH: CONTACTS: 22 = 0.75μm GOLD ON CONTACT AREA, 3µm 90/10 TIN/LEAD ON TAILS $45 = 0.75 \mu m GOLD$ 42 = 0.75 mm GOLD ON CONTACT AREA. 3.0 mm 100% TIN OVER NICKEL ON TAILS LATCH = 1.25µm NICKEL

CURRENT RATING $(25^{\circ}C) = 3.0A \text{ MAX}$. CURRENT RATING (85°C) = 2.2A MAX. WORKING VOLTAGE = 800V AC/DC VOLTAGE PROOF = 1200V AC/DC

CONTACT RESISTANCE (INITIAL) = $20m\Omega$ MAX. CONTACT RESISTANCE (AFTER CONDITIONING) = $25m\Omega$ MAX. INSULATION RESISTANCE (INITIAL) = $1000M\Omega$ MIN.

INSULATION RESISTANCE (AFTER CONDITIONING) = $100M\Omega$ MIN.

MECHANICAL: DURABILITY = 500 OPERATIONS


ELECTRICAL:

INSERTION FORCE $(\emptyset 0.5 \text{mm GAUGE}) = 2.0 \text{N MAX}$ WITHDRAWAL FORCE $(\emptyset 0.5 \text{mm GAUGE}) = 0.2 \text{N MIN}$

ENVIRONMENTAL: TEMPERATURE RANGE = -55°C TO +125°C

PACKING:

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICIATION COO5XX (LATEST ISSUE)

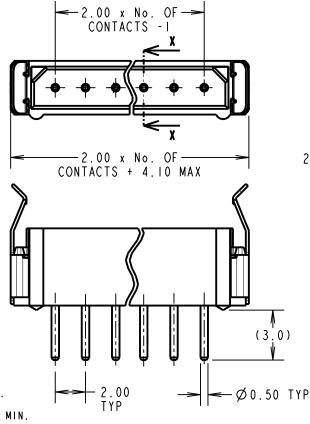

SECTION X-X 5.56 MAX 3.98 MAX

2.25 TYP -<>|<-2.00 x (No.-> OF CONTACTS - I) RECOMMENDED PCB LAYOUT Ø0.70±0.05 TYP Ø0.95±0.05 TYP STRAIN RELIEF STRAP HOLES (OPTIONAL)

> 06.09.18 20806 NAMF DATE C/NOTE APPROVED: MGP CHECKED: RP DRAWN: I. SANDY CUSTOMER REF.:

NOTES:

I. 2-OFF STRAIN RELIEF STRAPS M80-0030006 MAY BE USED WITH EACH CONNECTOR.

mm²

ASSEMBLY DRG:

www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING. TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION

 $X = \pm 1$ mm $X.X = \pm 0.50 mm$ $X.XX = \pm 0.10$ mm $X.XXX = \pm 0.01$ mm ANGLES = $\pm 5^{\circ}$

UNLESS STATED

TOLERANCES MATERIAL:

S/AREA:

SEE ABOVE FINISH: SEE ABOVE

DATAMATE SIL VERTICAL TITLE: PC TAIL PLUG ASSEMBLY - LATCHED

DRAWING NUMBER:

M80-882XXXX

SHT OF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Harwin:

<u>M80-8820742</u> <u>M80-8820342</u> <u>M80-8820542</u> <u>M80-8821742</u> <u>M80-8820242</u> <u>M80-8820642</u> <u>M80-8820442</u> <u>M80-8820442</u> <u>M80-8820442</u> <u>M80-8820445</u> <u>M80-8820545</u> <u>M80-8820745</u> <u>M80-8821745</u> <u>M80-8822245</u> M80-8820622 M80-8820322 M80-8822222 M80-8820522 M80-8820422 M80-8820722 M80-8821722