

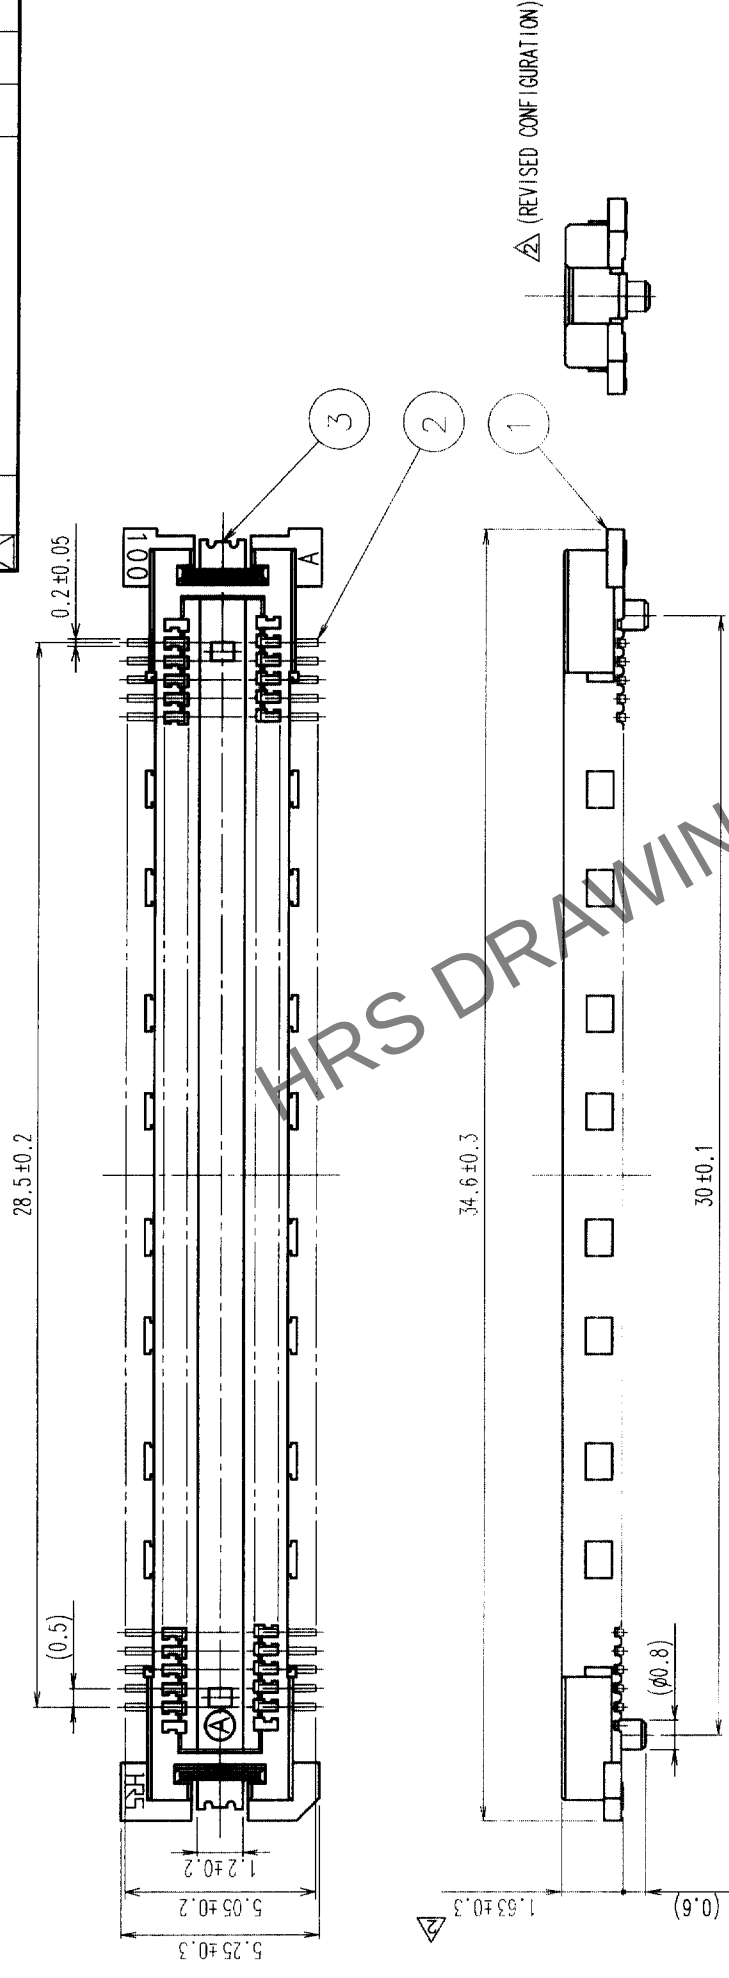


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	3 RE-F-06374	J.M.M.	1	99.05.15					
2	3 RE-F-06522	J.M.M.	1	99.9.7					
				.					

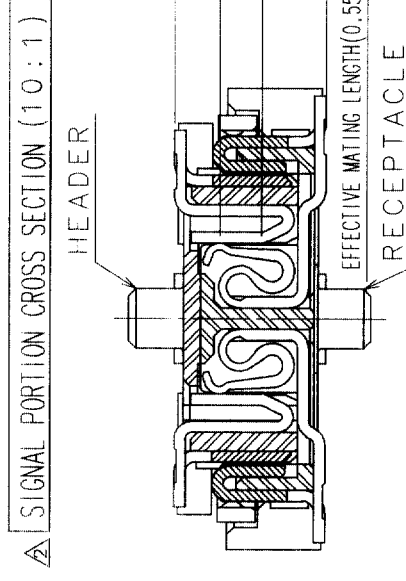

RECOMMENDED LAND PATTERN DIMENSION OF PCB

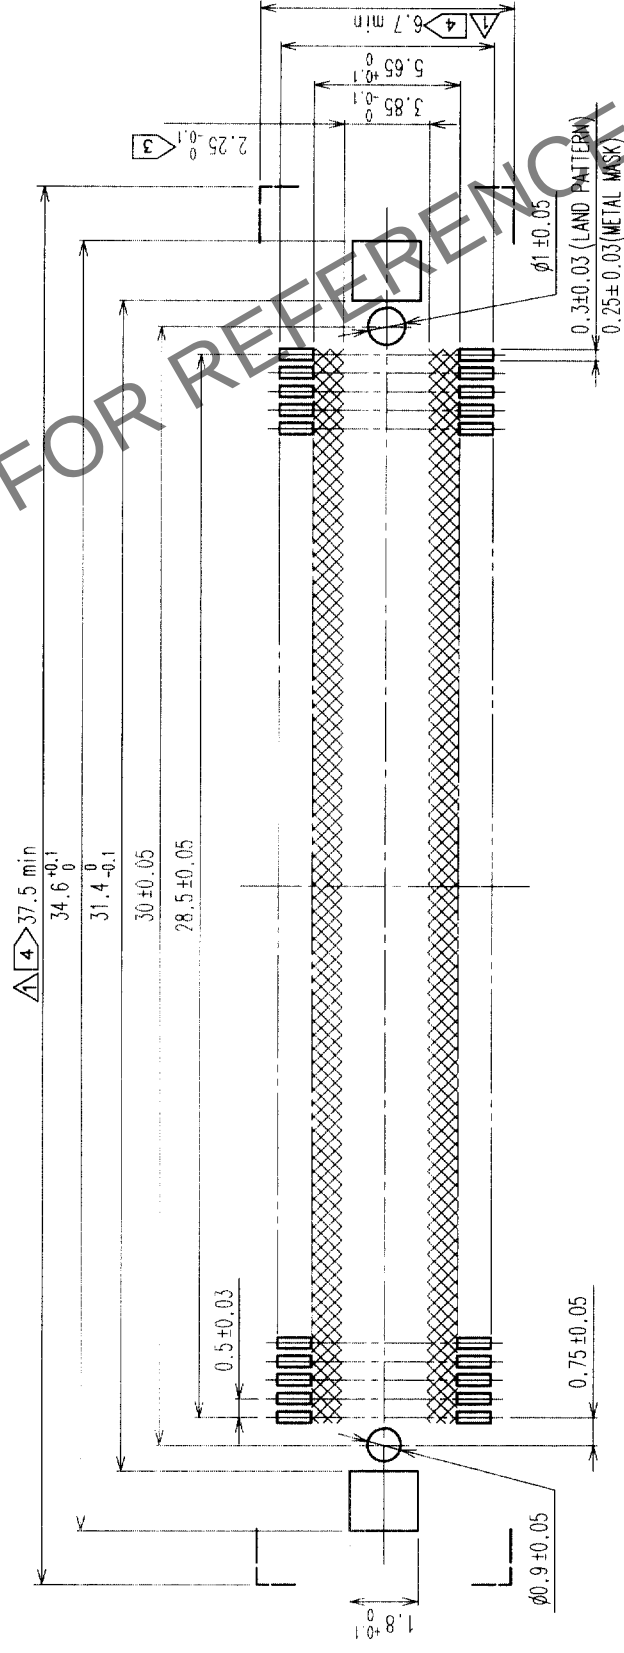

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL	
		LEAD: COLD FLASH OVER NICKEL	
1	LCP	BEIGE	UL94V-0
NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)		DRAWING NO. EDC3-152102	
CL			
		J. Matsui	
		9902	
SCALE			
5 : 1			
UNITS		HI ROSE ELECTRIC CO., LTD.	
		mm	

NOTES 1 SMT LEAD-COPLANARITY: 0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
4  DO NOT MOUNT OTHER DEVICES ONTO  AREA, OR MATING PAIR CANNOT BE MATED.

TO	PCK			
----	-----	--	--	--